

ASX Release 15 September 2026

Boss Energy – 2026 Market Day Presentation

Boss Energy Limited (ASX: BOE; OTCQX: BQSSF) (“Boss” or the “Company”) is pleased to provide a release of the Market Day presentation that it will provide to institutional investors and analysts today in Sydney.

The Market Day will provide an update on Boss’ strategy, operational priorities and growth opportunities, underpinned by the Honeymoon New Feasibility Study and the Company’s strengthened leadership and technical capability.

The program will also outline Boss’ aspiration to build a larger, lower-cost and longer-life uranium business through operational improvements and the potential development of Gould’s Dam and Jason’s Deposit.

A copy of the Market Day presentation is attached.

A recording of the presentation will be available by Friday 18 September, and the link to this recording is: <https://loghic.eventsair.com/113514/516881/Site/Register>.

This ASX announcement was approved and authorised by the CEO on behalf of the Board of Boss Energy Limited.

For further information, contact:

Matthew Dusci

Managing Director

P: +61 (8) 6263 4494

E: boss@bossenergy.com

FOR FURTHER INFORMATION PLEASE CONTACT:

Boss Energy Limited

ABN 38 116 834 336

Level 1, 420 Hay Street, Subiaco
Western Australia 6008

Matthew Dusci - Managing Director/ CEO

+61 (08) 6263 4494

ASX: BOE

OTCQX: BQSSF

www.bossenergy.com



15 September 2026

Boss Energy - Market Day

A global multi-mine Uranium producer.

bossenergy.com

ASX: BOE
OTCQX: BQSSF

BOSS
ENERGY

Disclaimer and Important Notices

This investor presentation ("Presentation") has been prepared by Boss Energy Limited (ACN 116 834 336) ("Boss Energy", "Boss" or "Company").

NOT INVESTMENT ADVICE

This Presentation does not constitute in any way an offer or invitation to subscribe for securities in Boss Energy pursuant to the Corporations Act 2001 (Cth) and has not been lodged with the Australian Securities and Investments Commission.

This Presentation does not constitute investment advice and has been prepared by Boss Energy without taking into account the recipient's investment objectives, financial circumstances or particular needs. Each recipient must make his/her own independent assessment and investigation of Boss Energy and its business and assets when deciding if an investment is appropriate and should not rely on any statement or the adequacy and accuracy of any information. This Presentation is in summary form and is not exhaustive. This Presentation should be read in conjunction with Boss Energy's periodic and continuous disclosure announcements lodged with the Australian Securities Exchange, which are available to download at www.asx.com.au.

PAST PERFORMANCE

Past performance information, including past share price performance of Boss and past Honeymoon Project information, given in this Presentation is given for illustrative purposes only and should not be relied upon as (and is not) an indication of Boss's (or anyone else's) views on Boss's future activities, guidance or financial performance or condition. Past performance of Boss cannot be relied upon as an indicator of (and provides no guidance as to) the future performance of Boss.

FORWARD LOOKING STATEMENTS

This Presentation contains certain forward-looking statements provided by or on behalf of Boss with respect to potential future matters. Forward-looking information may include, without limitation, statements regarding plans, strategies and objectives of Boss, production and financial guidance, financial forecasts, estimates of project milestones and timing and expected costs or production outputs. In some cases, forward-looking information can be identified by terms such as "may", "will", "should", "expect", "plan", "anticipate", "believe", "intend", "estimate", "predict", "potential", "continue" or other similar expressions concerning matters that are not historical facts.

Guidance as to production, unit costs and capital expenditure is based on assumptions, budgets and estimates existing at the time of assessment which may change over time impacting the accuracy of those estimates. These estimates are developed in the context of an uncertain operating environment including in respect of inflationary macroeconomic conditions, and uncertainties surrounding the risks associated with mining which may impact production and have a flow on effect on sales. Actual results may therefore vary significantly depending on these risks and the timing required to address them.

Forward-looking statements reflect Boss's expectations at the date of this Presentation, however they are not guarantees or predictions of future performance or statements of fact. Forward-looking information involves known and unknown risks, uncertainties and other factors (many of which are beyond the control of Boss and its directors and management) which may cause the actual results, performance or achievements of Boss and its business to be materially different from any future results, performance or achievements expressed or implied by the forward-looking information. Accordingly, undue reliance should not be placed on forward-looking information.

The forward-looking statements in this Presentation reflect various assumptions by or on behalf of Boss (which assumptions may prove to be inaccurate). Accordingly, this is another reason why such statements are subject to significant business, technical, legal, economic and competitive and other uncertainties and contingencies and other factors which may be beyond the control of Boss which could cause actual results or trends to differ materially from the forward-looking statements in this Presentation, including but not limited to differences or inaccuracies arising from price and currency fluctuations, geotechnical factors, geological and mining factors, estimated continuity of mineralised horizons, metallurgical and processing factors, sales factors, drilling and production results, development progress, operating results, mineral resource estimates, legal issues, legislative, fiscal and regulatory developments, economic and financial market conditions in various countries, approvals and cost estimates, environmental risks, ability to meet funding requirements, share price volatility, uranium markets and other matters.

Accordingly, there can be no assurance that such forward-looking statements and projections will be realised.

Boss makes no representations as to the accuracy or completeness of any forward-looking statements or projections or that any forecasts will be achieved. Additionally Boss makes no representation or warranty, express or implied, in relation to, and (to the maximum extent permitted by law) no responsibility or liability (whether for negligence, under statute or otherwise) is or will be accepted by Boss or by any of its officers, directors, shareholders, partners, employees, or advisers as to or in relation to the accuracy or completeness of the information, statements, opinions or matters (express or implied) arising out of, contained in or derived from this Presentation or any omission from this Presentation.

Boss does not undertake or accept any obligation or undertaking to release publicly any updates or revisions to any forward-looking statements to reflect any change in Boss's expectations or any change in events, conditions or circumstances on which any such statement is based, except as required by law.

Mineral Resource estimates are necessarily imprecise and depend on interpretations and geological assumptions, minerals prices, cost assumptions and statistical inferences (and assumptions concerning other factors, including mining, processing, metallurgical, infrastructure, economic, marketing, legal, environmental, social and governmental factors) which may ultimately prove to be incorrect or unreliable.

Mineral Resource estimates are regularly revised based on actual exploration or production experience or new information and could therefore be subject to change. In addition, there are risks associated with such estimates, including (among other risks) that minerals mined may be of a different grade or tonnage from those in the estimates and the ability to economically extract and process the minerals may become compromised or not eventuate.

Accordingly, this is another reason why no assurances can be given of whether the production guidance, financial forecasts or other forecasts or other forward-looking statements or information in this Presentation will be achieved.



Disclaimer and Important Notices

CURRENCY AND EFFECT OF ROUNDING

All dollar (“\$”) amounts are in Australian dollars unless otherwise stated. All cost forecasts are in real 2026 terms. A number of figures, amounts, percentages, estimates, calculations of value and fractions in this Presentation are subject to the effect of rounding. Accordingly, the actual calculation of these figures may differ from the figures set out in this Presentation.

MINERAL RESOURCE ESTIMATES

The information in this Presentation that relates to the Mineral Resource estimate for the Honeymoon Deposit was reported in an announcement by the Company dated 27 August 2026 titled “Honeymoon New Feasibility Study and MRE Update”.

The information in this Presentation that relates to the Mineral Resource estimate for Gould’s Dam and the Jason’s Deposit was reported in an announcement by the Company dated 19 March 2026 titled “Gould’s Dam and Jason’s Deposit Mineral Resource and Permitting Update.”

The Company confirms that it is not aware of any new information or data that materially affects the information included in the original market announcements referred to above and that all material assumptions and technical parameters underpinning the Honeymoon Deposit, Gould’s Dam and Jason’s Deposit Mineral Resource estimates in the original market announcements referred to above continue to apply and have not materially changed.

PRODUCTION TARGET AND FORECAST FINANCIAL INFORMATION

The information in this Presentation that relates to the production target (and forecast financial information derived from the production target) for the Honeymoon Deposit was reported in an announcement by the Company dated 27 August 2026 titled “Honeymoon New Feasibility Study and MRE Update.”

The Company confirms that all the material assumptions underpinning the production target and forecast financial information derived from the production target in that announcement continue to apply and have not materially changed.

The production target and forecast financial information for the Honeymoon Deposit referred to in this Presentation is based on 65% Indicated Mineral Resources and 35% Inferred Mineral Resources over the 9-year life of mine. The first 4 years of the production target is underpinned by 89% Indicated Mineral Resources and 11% Inferred Mineral Resources. There is a low level of geological confidence associated with Inferred Mineral Resources and there is no certainty that further exploration work will result in the determination of Indicated Mineral Resources or that the production target will be realised.

The Company believes that it has a reasonable basis for providing the production target and forward-looking statements in this Presentation announcement as the Inferred Mineral Resources are not the determining factor in project viability (noting, most significantly that Honeymoon is already in production). Refer to Section 12 of the New Feasibility Study (attached to the Company’s announcement dated 27 August 2026 titled “Honeymoon New Feasibility Study and MRE Update.”) for the material assumptions underpinning the production target and forecast financial information.

ASPIRATIONAL STATEMENTS

The statements which appear throughout this announcement regarding the aspiration for the Honeymoon Processing Hub to produce 2.5M lbs U₃O₈ at an AISC of A\$65/lb (US\$45/lb) by the early 2030s are aspirational statements and not a Production Target. The Company does not yet have reasonable grounds to believe these statements can be achieved. In particular, the statements are aspirational because:

1. whilst the Company has undertaken various internal studies on the Gould’s Dam deposit and Jason’s Deposit, the Company has not yet completed a Scoping Study or a Feasibility Study or published a Production Target for Gould’s Dam or Jason’s Deposit. Substantial further work is required before such a Scoping Study, Feasibility Study or Production Target could be completed or published; and
2. the aspiration is dependent on integrating the Gould’s Dam and Jason’s Deposit with the existing Honeymoon Mine operations. This remains subject to a number of variables, including: further drilling and resource definition; hydrogeological, metallurgical and wellfield performance; success of the wide-spaced wellfield design which is still currently being tested at Honeymoon; ISR recovery assumptions; selection and implementation of transport and processing methods, including the proposed Jason’s Deposit trunkline and Gould’s Dam resin or eluate trucking options; Honeymoon plant and infrastructure capacity and upgrades; and obtainment of applicable regulatory and environmental approvals.

Accordingly, there is no certainty that the aspiration will be achieved.



Deep operational, technical and corporate expertise

Presenters and Q&A



Matt Dusci

Managing Director
and Chief Executive
Officer



Justin Laird

Chief Financial
Officer



Scott Lawrence

Managing Director
of Numerco Limited



Conrad Wilkins

General Manager



Olivier Regnault

Head of Technical
Services and Planning



Kathryn Walker

General Counsel



Guillaume Lorilleux

Principal Geologist
(RSC)

Agenda

1.
Overview
+ Strategy

Matt Dusci

2.
Market

Scott Lawrence

3.
Sales

Justin Laird

4.
Capital
Management

Justin Laird

5.
People

Matt Dusci

6.
Honeymoon
Operations

Conrad Wilkins

7.
Wellfields

Olivier Regnault

8.
Gould's Dam
+ Jason's
Deposit

Matt Dusci

9.
Alta Mesa

Matt Dusci

10.
Closing

Matt Dusci

Business Overview & Strategy

Boss Energy

Uniquely positioned to drive shareholder value



An established producer:

Honeymoon provides an operating mine, processing infrastructure and workforce from which to build



Specialist capability:

Our combined uranium operating experience and technical ISR expertise support better decisions and de-risk future opportunities



Financial strength and flexibility:

Strong balance sheet and strategic uranium inventory



Pathway for growth:

Potential for low- capital growth across the asset portfolio



Exposure to uranium opportunity:

Our production base, inventory and uncontracted position provide exposure to tightening uranium market

Foundations in place – turning this into reliable performance, growth and shareholder value

Business Strategy

Building a reliable, lower-cost, long-life uranium business

Business Strategy

Building a reliable, lower-cost, long-life uranium business



Honeymoon — an organic pipeline of deposits with established infrastructure

Deliver and Optimise Honeymoon



Safe, reliable and predictable production from the wide-spaced wellfield design, underpinned by operational excellence.

Build the Regional Production Hub



Produce from Jason's Deposit and Gould's Dam, leveraging Honeymoon's installed processing infrastructure — three deposits, one plant.

Grow the Resource & Discovery Pipeline



Increase the known Mineral Resource and systematically explore for new ISR-amenable deposits across the region to further leverage established infrastructure.

Beyond Honeymoon

Maximise and Optimise the existing portfolio



Ensure other assets in the portfolio achieve an acceptable return on capital.

Key Enablers

Our People

Our Technical & Operational Expertise

Our Culture

Deliver and Optimise Honeymoon

Honeymoon New Feasibility Study¹

01

The Challenge

The EFS design assumptions no longer reflected the orebody.

02

The cost reset

Incremental savings could not unlock the lower-grade resource.

03

The pathway forward

Wider spacing changes the economics of wellfield development.

Facing the challenge built the capability and urgency that reset our cost structure and materially improved our understanding

13.8 Mlbs

Planned U₃O₈ production

Nine years operating period to 2035²

A\$50 / A\$79

C1 / AISC per lb

Life-of-mine averages to 2034².

Step-change in economics

- ~A\$30/lb lower like-for-like AISC
- ~28% higher PLS grade
- ~50% less wellfield infrastructure
- Cost base enables a lower cut-off grade

1. Refer to ASX announcement 27 August 2026 "Honeymoon New Feasibility Study and MRE Update"

2. Refer to the "Production Target and Forecast Financial Information" section of the "Disclaimer and Important Notices" section of this Presentation for further information.

Build the Regional Production Hub

Lower costs change how we view the mineralised system

The opportunity at Gould's Dam and Jason's Deposit is defined by the cost of recovering ISR-amenable uranium, not by grade alone

Key learning from Honeymoon

Wide-spaced ISR lowers the cost to recover each pound

- Fewer wells
- less infrastructure
- more effective leaching



New development lens

System scale +
ISR amenability

Grade, permeability, recovery
and cost assessed together

45.1 Mlbs¹

Gould's Dam + Jason's Deposit

2× Honeymoon's mineral resource

Strategic Implication

**Gould's Dam and Jason's Deposit should be viewed as significant mineralised systems
— not simply as lower-grade satellite resources.**

Reducing the cost threshold has the potential to convert a broader portion of these systems into economic development opportunities.



Build the Regional Production Hub


One plant, three deposits

Gould's Dam – loaded resin

33.1Mlbs resource, resin trucked ~75km — no long-distance pipelines




Loaded Resin
Trucked



Honeymoon Processing Hub



New Trunkline +
Intermediate Storage



Jason's Deposit – new trunkline

12.0Mlbs resource, 13km twin trunkline to Honeymoon



Satellite deposits, one plant — more pounds, minimised new infrastructure

- **Low-capital growth**
Latent back-end capacity lifted with minimal capital
- **Longer mine life**
Gould's Dam and Jason's Deposit extend beyond the NFS
- **Staged capital**
Spend phases in as each deposit starts
- **Resilient supply**
Feed from three orebodies, not one
- **Operating synergies**
Fixed costs spread over more pounds — aspiration for the AISC to be ~A\$12/lb lower than the NFS by the early 2030s¹
- **Higher sustained output**
Hub aspiration of 2.5Mlbs a year at A\$65/lb AISC by the early 2030s¹

1 processing hub

Honeymoon plant, utilities and workforce already in place

3 deposits

Honeymoon, Gould's Dam and Jason's Deposit feeding a single plant

65.9Mlbs

Combined mineral resource across the three deposits²

1. Refer to the "Aspirational Statements" section in the "Disclaimer and Important Notices" section of this presentation.
2. Refer to Appendix 1 for further details of Mineral Resource classification for Gould's Dam, Jason's Deposit and Honeymoon

Build the Regional Production Hub

Production and costs could be meaningfully improved

2.5 Mlbs p.a.

Aspirational hub rate by the early 2030s, using installed back-end capacity¹

A\$65 /lb (US\$45/lb)

Aspirational AISC at hub scale by the early 2030s, on the NFS cost structure¹

~A\$12 /lb lower

Aspirational unit cost reduction by the early 2030s from fractionalising fixed costs¹

- A robust foundation**

The NFS provides a robust foundation for Honeymoon and pathway for value creation at Jason's Deposit and Gould's Dam.


- Optimise three production sources**

Integrate all three deposits through a regional operating and processing hub to increase utilisation of existing infrastructure.

- A step change in performance**

Aspiration is to materially increase production, lower unit costs and extend mine life beyond the Honeymoon-only plan.

Aspiration Rate and AISC by Development Stage¹

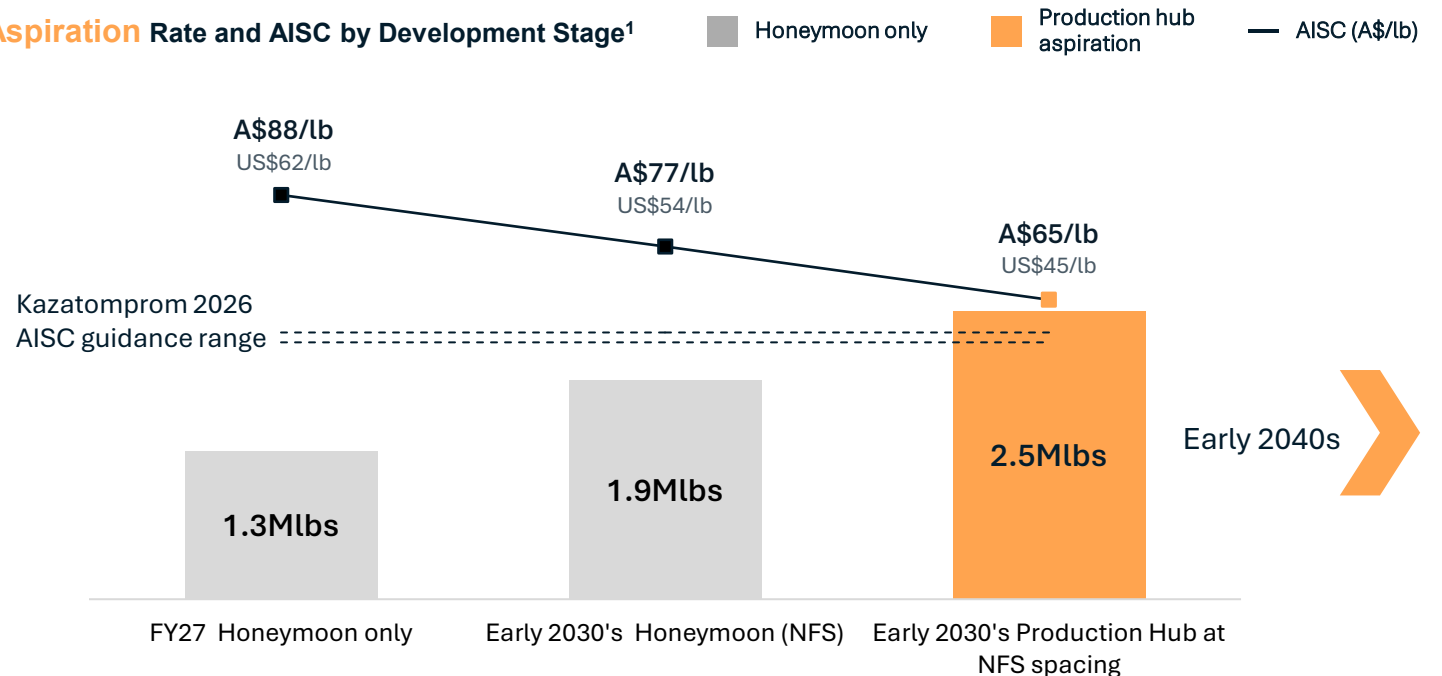

1. Refer to the "Aspirational Statements" section in the "Disclaimer and Important Notices" section of this presentation.

Strategy enablers

The foundations of our success

Our people, technical capability and culture underpin delivery of our strategy



Our People

- Renewed Board and leadership, with deep industry experience
- Building depth across technical and operational teams
- Developing our people to support the next phase of growth



Our technical & operating capability

- Integrated ISR expertise, from geology through to processing
- Operating data and modelling inform better decisions
- Applying Honeymoon learnings to optimisation and satellite growth



Our Culture

- Safety and care for our people at the centre of every decision
- One team, with clear ownership and accountability for delivery
- Challenging assumptions and learning to improve performance

Building a lasting competitive advantage through the strength of our team and our culture

Capital discipline and shareholder value

Focused on value creation

01

Ensure margins are generated

Focused on the generation of margin and costs – have laid a new foundation for the business through the NFS

02

Commit capital where it earns a return

Stage wellfield investment and satellite development as technical confidence and approvals advance

03

Leverage existing capital – low capital cost growth

Maximise the contribution of Honeymoon's processing infrastructure and operating capability – ensuring low capital growth pathway

04

Operational Excellence & Business Resilience

A culture of continuous improvement and delivery to plan

05

Remain leveraged to tightening uranium market

Remain strategically uncontracted with significant uranium inventory

Plan is to grow in production, operating margins and long-term value while being strategic on capital deployment.

Uranium Market Outlook

Macro Trends and Micro Factors

Boss Energy. A global multi-mine Uranium producer

Micro Uranium Market Economics


Micro Uranium Market Economics



Macro Picture

U₃O₈ demand is set to outrun supply

World reactor requirements, million lbs U₃O₈ per year

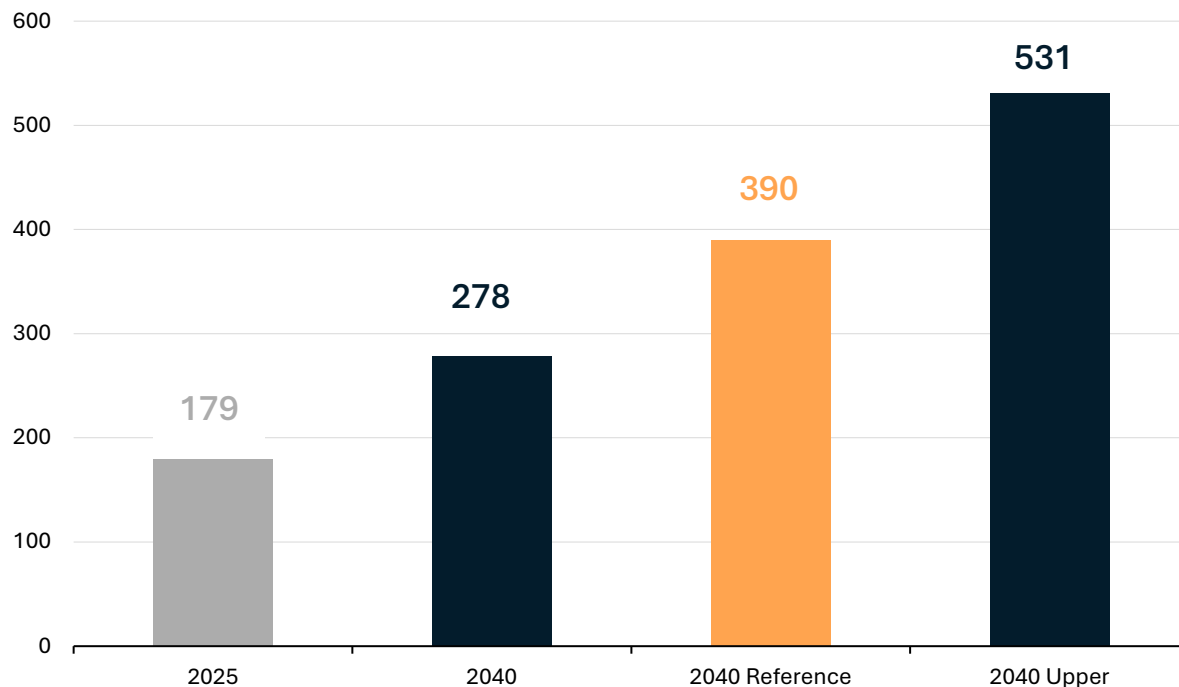

World Nuclear Association, 2025

90%

of 2024 reactor demand was met by mined supply — the rest drawn from finite, shrinking secondary sources.

World Nuclear Association, 2025

3.1bn lbs

of cumulative utility uranium requirements are uncovered by contracts to the end of 2045.

UxC, via Cameco, 2026

2030s


the decade today's top-producing mines deplete — while new mines now take 10–20 years to develop.

WNA; ConverDyn, 2025

Macro Picture, Market Fundamentals

Mine supply is concentrated, constrained and ageing

World uranium mine production, million lbs U_3O_8 per year

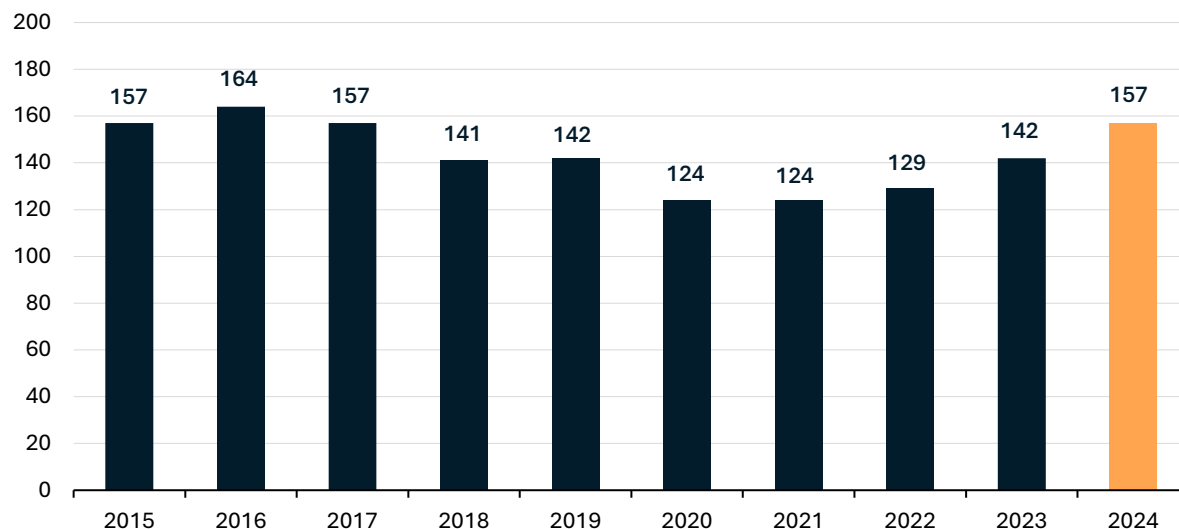

WNA production data (tU, converted at 2,600 lbs U_3O_8 /tU). 2024 output of 60,213 tU met just 90% of reactor requirements (2023: 83%; 2020-2022: 74-76%) — the balance came from finite secondary supplies.

Sources: World Nuclear Association, World Uranium Mining Production (2024 data) & Nuclear Fuel Report 2025. Sprott, Uranium Outlook 2026. ConverDyn via World Nuclear News (2025)

75%

Of world production comes from just three countries — Kazakhstan (39%), Canada (24%) and Namibia (12%).

World Nuclear Association, 2024 data

77 Mlbs

Kazatomprom's reduced 2026 production quota (from 85 Mlbs) — with willingness to flex a further 20% lower.

Kazatomprom, via Sprott, 2026


Mid-2030s

when existing mines face resource depletion — while new mines now take 10-20 years to develop.

WNA Nuclear Fuel Report 2025, ConverDyn

Macro Picture, Market Fundamentals

The gap between demand and mined supply

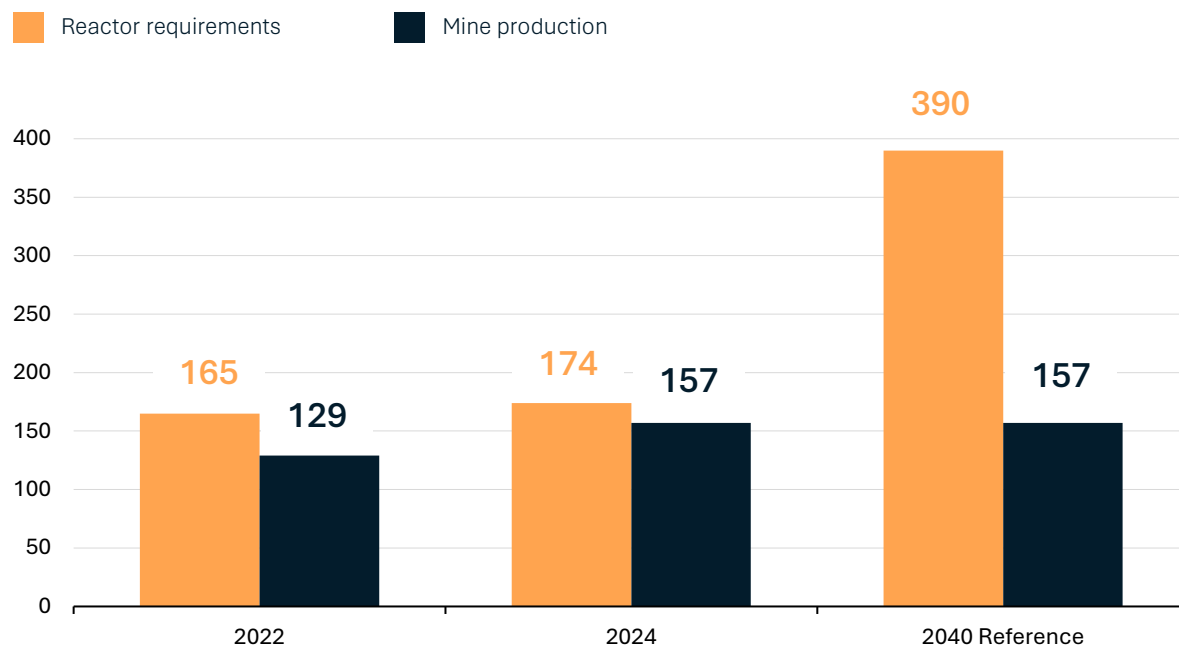Reactor requirements vs mine production, million lbs U₃O₈ per year

2022 and 2024: WNA actuals (production, and requirements implied by WNA's stated 78% / 90% mine-supply coverage). 2040: WNA Reference Scenario demand vs mine output held at today's level for scale — WNA expects existing mines to deplete from the mid-2030s, so output without new mines would be lower still.

233 Mlbs/yr

by which 2040 Reference demand (390 Mlbs) exceeds today's entire annual mine output (157 Mlbs).

Derived from WNA, 2025

3.1bn lbs

of cumulative utility uranium requirements are uncovered by contracts to the end of 2045

UxC, via Cameco, 2026


116 vs 185

Mlbs placed under long-term contract in 2025, against ~185 Mlbs consumed annually — contracting below replacement rate.

Cameco; Sprott 2026

Consumption Lead Time

The Front-End Nuclear Fuel Cycle

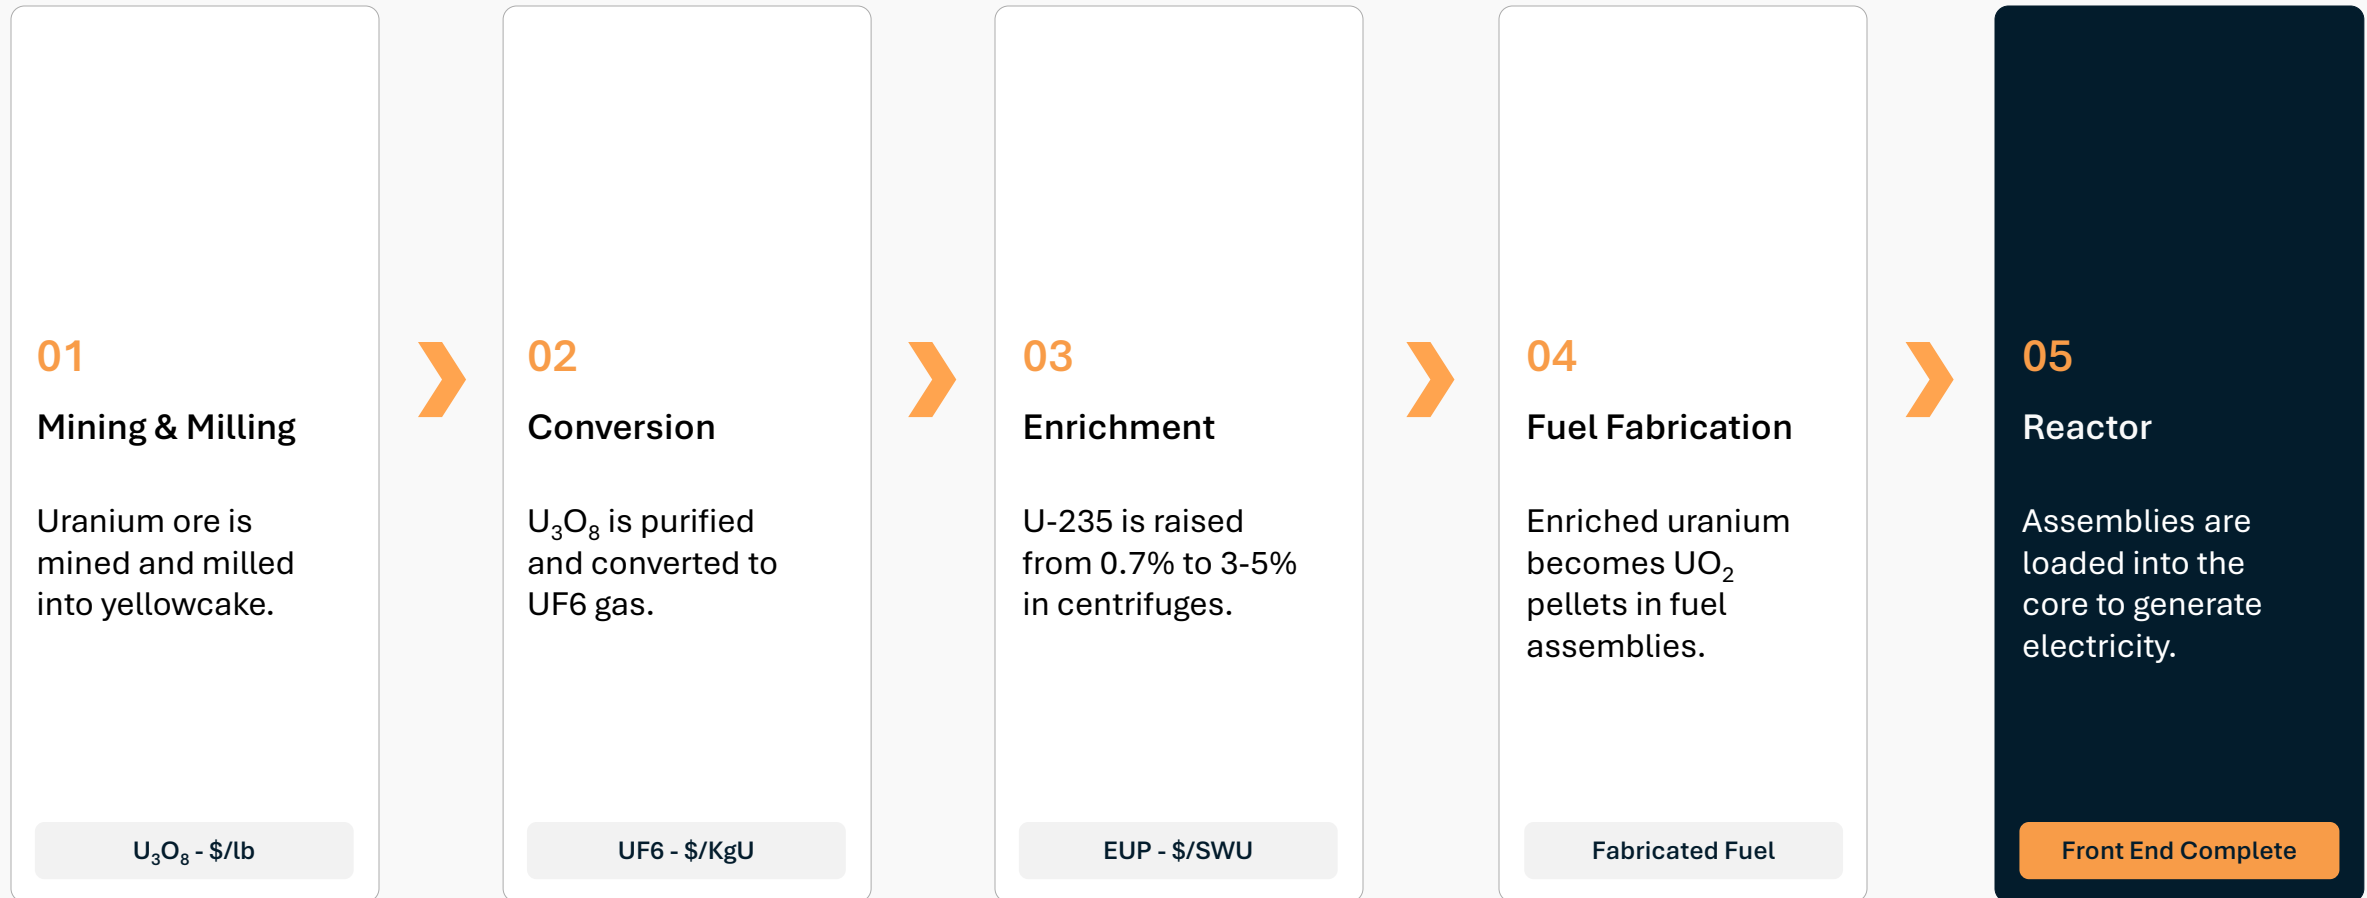


Sales Strategy

Deliberately under-contracted

73% of inventory and forecast NFS life-of-mine production is uncontracted, with forward sales executed on a rolling forward basis.

Life-of-mine contract position

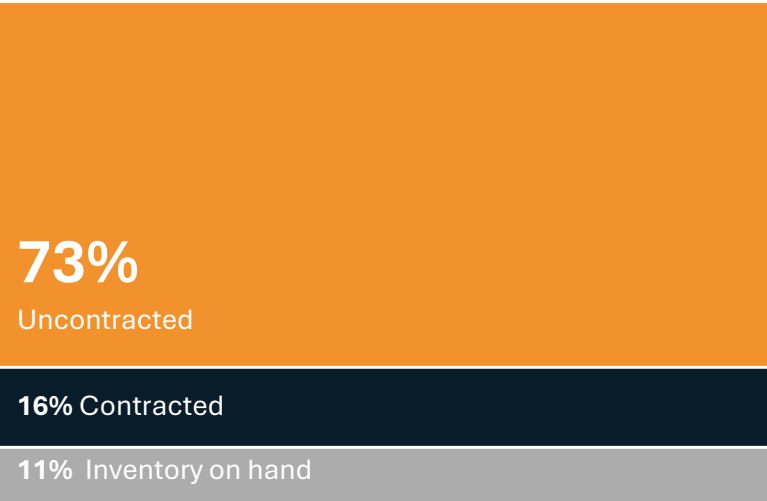

Weighted Average Realised Price (US\$/lb)

Calendar Year	\$60	\$80	\$100	\$120	\$140
2027	57	75	91	105	119
2028	57	76	94	111	127
2029	57	76	95	112	129
2030	58	77	96	113	130
2031	58	77	95	112	129
2032	59	78	98	117	136
2033	60	80	100	120	140

Marketing strategy Strategically under-contracted Only 16% of total inventory and LOM production is committed, which is mostly covered by inventory on hand, preserving substantial exposure to a rising spot price.	Forward sales Uncommitted pounds are sold on a forward basis, giving Boss greater control over timing of sales.	Inventory as optionality 1.58Mlbs ² of drummed inventory adds timing flexibility and further leverage to price.
---	---	--

1. Life-of-mine production based on production from Honeymoon only as set out in the NFS. Excludes aspirational production from Gould's Dam and Jason's Deposit
 2. As at 30 June 2026.

Capital Framework

Capital Management

A disciplined capital allocation framework

Ongoing transition to wide-spaced wellfield design to be funded organically.

Capital allocation framework

- 01 Operations
- 02 Value-accretive wellfield development
- 03 Acceleration of satellite resources
- 04 Maintain cash working capital balance
- 05 Inventory movements

Cash Target Range

Hold cash as a working capital balance.

Value-Accretive Wellfields

Wellfield capital is committed only where returns are accretive.

Inventory Movements

Adjust inventory based on market conditions and capital requirements. Realise additional value e.g. inventory loan.

Organic Funding

The transition to wide-spaced wellfield design is funded from operations.

Accelerate Satellite Resources

Bring satellite deposits forward to fractionalise fixed costs and realise value.

Debt Free

No borrowings; balance sheet undrawn

\$207M

Cash, inventory and liquid assets at book value¹

\$195M

Inventory at market value² vs \$116M at book value¹

1. Balance sheet metrics as at 30 June 2026.

2. 1.581Mlbs at UxC spot rate on 29 June 2026 of US\$84.75 and AUD:USD of 0.6869

A photograph of three workers in an industrial setting, likely a uranium mine. They are wearing orange high-visibility work jackets with "BOSS" logos, white hard hats, and safety glasses. They are standing behind a metal railing. The background shows industrial equipment and structures. A large orange semi-circle graphic is overlaid on the left side of the image.

Our People Our Team

Our team

People are key - building deeper capability

A renewed Board, a strengthened leadership team and deeper technical expertise across the organisation.

A largely new team

We have brought together new perspectives, deeper expertise and extensive uranium operating experience — building capability across the organisation, not around individuals.

01

Renewed Board leadership

Incoming Chair Peter Botten, brings extensive resources sector, operational and capital markets experience.

BOARD

02

A strengthened leadership team

New appointments have established greater operational accountability, commercial discipline and focus on execution.

LEADERSHIP

03

Deeper technical capability

Materially strengthened our technical capability.

Uranium

Hydrogeology

Geology

Geochemistry

Wellfield

Processing

Planning

TECHNICAL

04

Experience in decision making

The depth and diversity of the new team strengthens decision- making, develops our people and lifts capability across the organisation

CAPABILITY

05

One team focused on delivery

A collaborative, accountable and performance-focused culture — the strength of our people and how we work together.

CULTURE

Building a strong team is central to delivering our strategy — and will be an enduring competitive advantage for Boss.

Our people

Snapshot of our team

140 Total workforce


35% Prior ISR / uranium experience
(49)

22% Hold a technical degree
(31)

88% South Australia based
(123)

Leadership


46% New in Leadership Roles over past 12 months



● Existing (54%)
● New (46%)

Gender profile


21% Female



● Male (78.6%)
● Female (20.7%)

Technical qualifications


22% hold University Degrees



● Geology / Hydrogeology (52%)
● Chemical Eng. / Chemistry (32%)
● Mechanical / Civil Eng. (10%)
● Environmental Science (6%)

Experience by organisation


35% prior ISR/ Uranium Experience



● Heathgate (40%)
● BHP (35%)
● Other uranium / ISR (16%)
● Multiple organisations (9%)

Residential location

88% South Australian Based



● South Australia 123 (87.9%)
● Other states / overseas 17 (12.1%)

New leadership, highly technical organisation with deep uranium and ISR expertise

Deep operational, technical and corporate expertise

The Boss Leadership Team

Building quality leadership teams

Positioned for delivery and growth

A largely new leadership team combining deep operational, technical and corporate expertise – building the capacity to deliver Boss Energy's Strategy



Matt Dusci

Chief Executive Officer and Managing Director

Joined Sep 2024

Matt is an accomplished mining executive with over 25 years experience.

For the past 10 years, prior to joining Boss Energy, Matt held several executive positions at IGO Limited. These included Acting CEO, Chief Operating Officer and Chief Growth Officer.

He joined Boss Energy in September 2024 and was appointed Managing Director and Chief Executive Officer in October 2025.



Justin Laird

Chief Financial Officer

Joined Mar 2024

Justin was previously Manager Business projects at Wesfarmers where he held several senior positions in business development, leading transaction and finance teams, scaling new businesses, and other commercial and strategic roles. Justin, who is a Chartered Accountant, commenced his career at EY and also worked in capital investment and strategic finance roles at Vodafone Ireland.



Kathryn Walker

General Counsel

Joined Aug 2026

Kathryn joined Boss Energy in August 2026 and has more than 20 years experience advising on complex major projects across the energy, infrastructure and natural resources sectors, spanning approvals, land access, contracting and operations. She was previously General Counsel at Symphony Infrastructure Partners and a partner at Piper Alderman and is a Graduate of the Australian Institute of Company Directors.



Conrad Wilkins

General Manager

Joined Sep 2025

Conrad is a Chartered Engineer and Fellow of the Australian Institute of Mining & Metallurgy. Conrad joined Boss Energy from WGA in Adelaide, where he worked as Process Technical lead and has over 20 years of Process Engineering experience with a strong focus on project and design management. Conrad's experience includes operating experience at Beverley Uranium Operation and Olympic Dam.



Olivier Regnault

Head of Technical Services and Planning

Joined Sep 2025

Olivier joined Boss Energy in September 2025 and holds a PhD in Hydrogeology and Geochemistry. He has over 15 years experience in mining operations across Kazakhstan, France, Canada and Africa and is a technical expert in uranium in-situ leach, mine planning and advanced modelling.

Leadership

The Board

Substantial board and governance renewal over the past 12 months.

- Peter Botten (Chair-elect) – End Sep 2026
- Matt Dusci (CEO & MD) - Oct 2025
- Caroline Keats (NED) – Jun 2025
- Joanne Palmer (NED) – Jun 2025

A complementary Board combining proven resources leadership, operational experience, financial discipline and strong governance.



Wyatt Buck

Non-Executive Chair
(stepping down
30 Sep 2026)

**Chair since Mar 2023;
NED since Oct 2020**

- 15 years at Cameco, including GM of McArthur River Mine and Key Lake Mill
- Senior operational roles at Paladin Energy
- Operations Director, First Quantum Minerals, 2011–2020



Peter Botten

Non-Executive Chair-elect
(from 1 Oct 2026)

Chair from Oct 2026

- 35+ years as a resources executive and director
- Managing Director of Oil Search 1994–2020, delivering the PNG LNG Project
- Non-Executive Chair of Conrad Asia Energy and Karoon Energy



Matt Dusci

Chief Executive Officer
and Managing Director

Commenced Oct 2025

- 25+ years as a mining executive
- Acting CEO, COO and Chief Growth Officer at IGO
- Joined Boss Energy in 2024; CEO and MD from Oct 2025



Caroline Keats

Non-Executive Director

Commenced June 2025

- 20+ years of corporate and commercial experience
- Senior executive and Managing Director roles in listed companies
- Expertise in legal, financing, government relations and off-take



Joanne Palmer

Non-Executive Director

Commenced June 2025

- 28+ years in audit and assurance, including 19 years at EY
- Resources sector focus across the UK, Africa, Europe, the Americas and Australasia
- Advises multinationals, mid-caps and junior explorers

Experienced operational, technical and functional leaders delivering at Honeymoon

Honeymoon Operational Expertise

A largely new operational leadership team assembled over the past 12 months

- Complementary capability across wellfields, processing, projects, safety, environment and people
- Deep uranium and ISR experience gained in Australia and internationally
- Combining technical expertise with practical operating and project-delivery experience
- Working as one team to strengthen execution, develop our people and deliver safe, reliable production



Alex Baum

Projects
Superintendent

Joined - Apr 2025

Alex holds a Masters degree in Engineering and joined Boss Energy in April 2025. He has extensive engineering design, construction and project management experience.



Adylbek Joldassov

Wellfields Manager

Joining – Nov 2026

Adylbek joins Boss Energy from Katco in Kazakhstan, where he held the position of Head of Mining Extraction, ISR. Adylbek holds a Masters Degree in Chemical Engineering and has over a decade of hands-on ISR Uranium expertise.



Steve Telford

Process Manager

Joined – Sep 2025

Steve has over 20 years experience in mining and mineral processing. He holds a Bachelor of Engineering (Chemical) and joined Boss Energy in September 2025. Steve has worked for Heathgate Resources and BHP's Olympic Dam and held several complex technical and leadership roles.



Sean Chipman

Health and Safety
Superintendent

Joined - Jan 2026

Sean has over 20 years experience across several industries in Australia, with demonstrated experience in leading organisational safety culture transformation, legislative compliance, safety governance, risk management and workforce capability development. Sean joined Boss Energy in January 2026.



Sara Avory

Environment and
Radiation Superintendent

Joined – June 2023

Sara has two decades of experience in environmental and radiation management and regulatory reporting and holds a Bachelor of Applied Science (Environmental Science). Sara has worked for Heathgate Resources and Iluka's Jacinth Ambrosia mine site.



Sarah Barter

People and Culture
Superintendent

Joined – Oct 2025

Sarah is an experienced People & Culture leader with over 20 years success across resources, manufacturing and professional services sectors. She specialises in workforce planning, talent acquisition, employee relations, organisational change and culture development, partnering with leaders to build high-performing, engaged teams. She holds a Bachelor of Arts and qualifications in Training and Business.

Experienced operational, technical and functional leaders delivering at Honeymoon

Some of our Technical Capabilities

ISR expertise gained across Australia and internationally

Experienced chemical engineers with uranium operating and project experience



Olivier Regnault

- Wellfields Technical Lead (PhD Hydrogeologist/ Geochemist)
Previous – Orano (Global)



Adylbek Joldassov

- Wellfields Manager (Master – Chemical Engineer)
Previous – Katco (Kazakhstan)



Matt Williams

- Wellfields Superintendent (Hydrogeologist)



Ryan Gore

- Principal Wellfields Geologist (Geologist)
Previous - Heathgate



Kittiya Bushaway

- Hydrogeologist (Master – Groundwater Hydrology)
Previous – Rio Tinto



Conrad Wilkins

- GM - Honeymoon (Process Engineer)
Previous – WGA/Heathgate



Steve Telford

- Process Manager (Chemical Engineer)
Previous – Heathgate / BHP



Caren Kosgei

- Senior Process Engineer (Masters Chemical Engineer)



Brendan O'Carroll

- Process Engineer (Chemical Engineer)
Previous - WGA



Kade Morris

- Process Engineer (Chemical Engineer)

Our unique values developed by our people

Our five values that make us Boss Energy



01

Do What's Right

BEHAVIOUR

This means: Respect for everyone. Integrity in every call. Care in action.

OUTCOME

*Integrity tells us what to do.
Respect tells us how.
Care tells us why.
Ultimately, we do what is right.*



02

All in together

BEHAVIOUR

We share the load, share the goal, and share the win.

OUTCOME

At Boss, the sum is always greater than the part. We deliver because we do it together.



03

Own, Deliver & Celebrate

BEHAVIOUR

We aim high, own the outcome, and when we hit the mark, we celebrate it.

OUTCOME

At Boss, we want our work to matter, our results to count, and our successes to be celebrated



04

Break new ground

BEHAVIOUR

Standing still isn't in our DNA. Every day we push to be better than yesterday.

OUTCOME

At Boss, curiosity is how we grow. We try, we learn, and we get better continuously.



05

Think Big, Act Bold

BEHAVIOUR

We back our convictions, take the brave step, and lift our eyes to what's next.

OUTCOME

At Boss, courage is how belief becomes action. We dare to think differently because the change we want begins with us.

Honeymoon Operation

A strategic producing asset and well located to be a processing hub

Honeymoon Operation

1.41Mlbs

Produced in FY26

Location

South Australia, approximately 80 km north-west of Broken Hill

Operation

In-situ recovery (ISR) with continuous ion exchange processing

Operating History


Restarted April 2024; commercial production January 2025

Our People

115 employees, supported by an experienced uranium corporate and technical team

Mine Life

Nine-year mine plan established by the Honeymoon New Feasibility Study

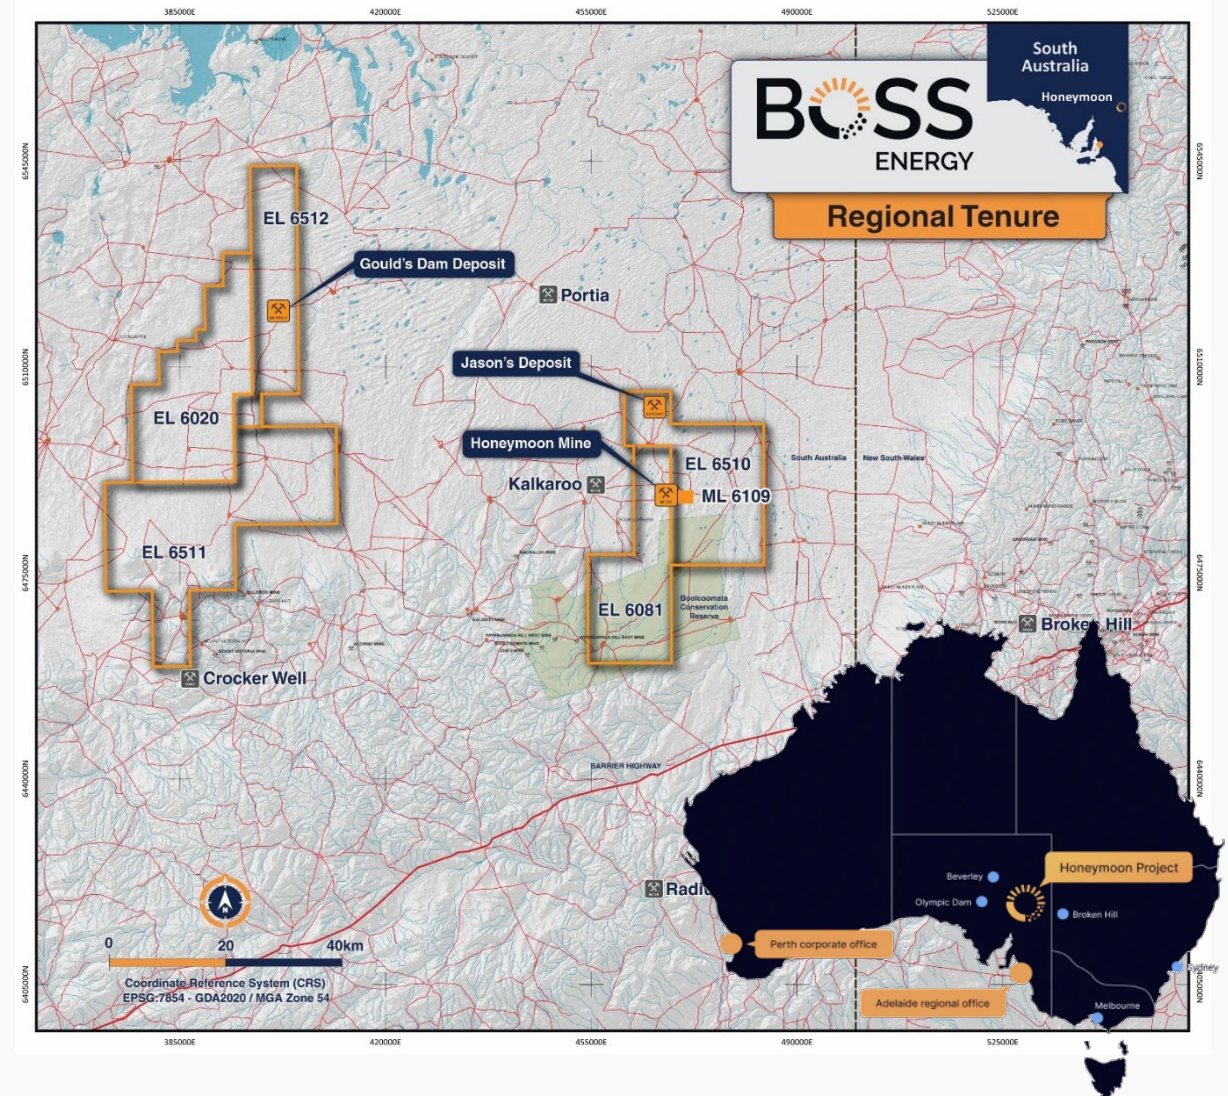

Honeymoon – Site

Honeymoon Operational Expertise

A largely new operational leadership team assembled over the past 12 months

- Complementary capability across wellfields, processing, projects, safety, environment and people
- Deep uranium and ISR experience gained in Australia and internationally
- Combining technical expertise with practical operating and project-delivery experience
- Working as one team to strengthen execution, develop our people and deliver safe, reliable production



Alex Baum

Projects
Superintendent

Joined - Apr 2025

Alex holds a Masters degree in Engineering and joined Boss Energy in April 2025. He has extensive engineering design, construction and project management experience.



Adylbek Joldassov

Wellfields Manager

Joining – Nov 2026

Adylbek joins Boss Energy from Katco in Kazakhstan, where he held the position of Head of Mining Extraction, ISR. Adylbek holds a Masters Degree in Chemical Engineering and has over a decade of hands-on ISR Uranium expertise.



Steve Telford

Process Manager

Joined – Sep 2025

Steve has over 20 years experience in mining and mineral processing. He holds a Bachelor of Engineering (Chemical) and joined Boss Energy in September 2025. Steve has worked for Heathgate Resources and BHP's Olympic Dam and held several complex technical and leadership roles.



Sean Chipman

Health and Safety
Superintendent

Joined - Jan 2026

Sean has over 20 years experience across several industries in Australia, with demonstrated experience in leading organisational safety culture transformation, legislative compliance, safety governance, risk management and workforce capability development. Sean joined Boss Energy in January 2026.



Sara Avory

Environment and
Radiation Superintendent

Joined – June 2023

Sara has two decades of experience in environmental and radiation management and regulatory reporting and holds a Bachelor of Applied Science (Environmental Science). Sara has worked for Heathgate Resources and Iluka's Jacinth Ambrosia mine site.



Sarah Barter

People and Culture
Superintendent

Joined – Oct 2025

Sarah is an experienced People & Culture leader with over 20 years success across resources, manufacturing and professional services sectors. She specialises in workforce planning, talent acquisition, employee relations, organisational change and culture development, partnering with leaders to build high-performing, engaged teams. She holds a Bachelor of Arts and qualifications in Training and Business.

Honeymoon Operation



One of only three
producing uranium
mines in Australia



One of only two ISR
mines in Australia



Successful restart of
Honeymoon Operation with
first production April 2024



The majority of the capital is
in place with 5 NIMCIX
columns operational

Honeymoon Operation

History and Key Operational Milestones

Uranium drummed (MLBS U₃O₈)

FY24

0.029 MLbs

- **April 2024**
First drum of uranium since restart, on IX Column 1 and Kiln 1
- **June 2024**
Column, centrifuge and kiln operating in automated mode
- **September 2024**
Wellfield B2 and IX Column 2 commissioned

FY25

0.873 MLbs

- **January 2025**
Commercial production achieved; Centrifuge 1 and Kiln 2 commissioned
- **March 2025**
Wellfield B3 and IX Column 3 commissioned
- **June 2025**
First full year of production — guidance surpassed at 871 klbs drummed

FY26

1.407 MLbs

- **February/March 2026**
Production interrupted by weather event — 26 days lost
- **Q2 FY26**
Record quarterly production — 456 klbs drummed
- **April–June 2026**
IX Columns 4 and 5 commissioned; Wellfield B6 operational through East Kalkaroo trunkline

FY27

1.25-1.30 MLbs Guidance

- **August 2026**
EKT1, the first wide-spaced hybrid wellfield, commences flushing
- **FY27 guidance**
1.25-1.30 MLbs, held flat while EKT1 tests wide-spaced hybrid design

2.31 MLbs U₃O₈ drummed since restart — 6 wellfields, 5 IX columns and 1 trunkline commissioned

Processing hub with long term life of mine

Honeymoon Operation

Hub


The processing plant is the hub of the operation

Progressive development

Wellfields progressively developed around the plant

Existing infrastructure

New wellfields connect to established infrastructure

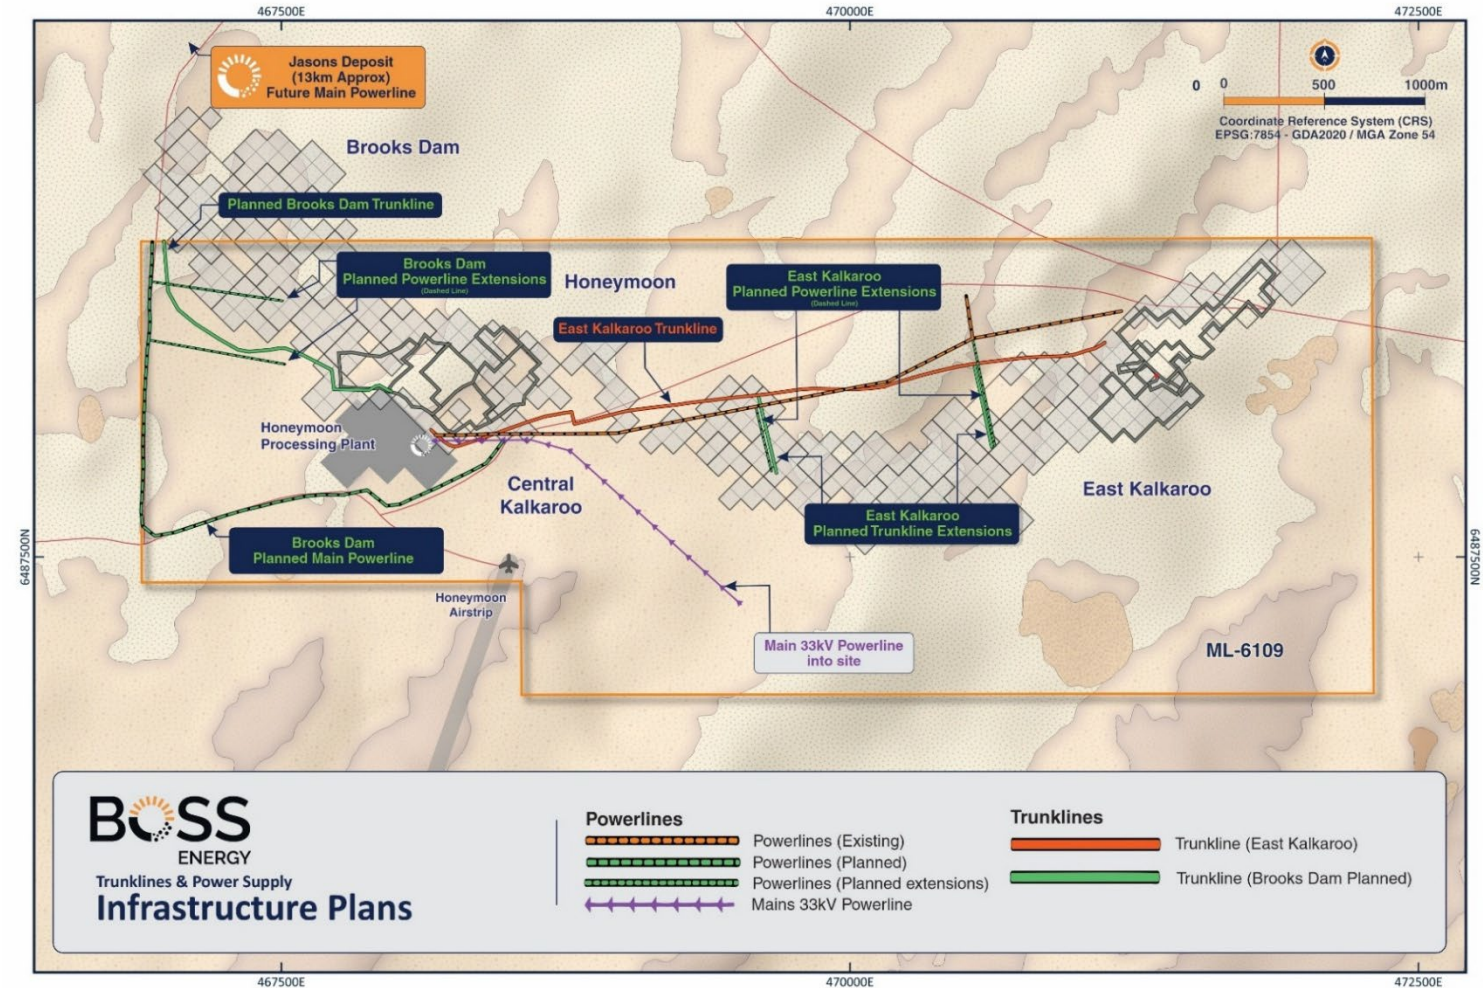

Proven processing technology with up to 2.5Mlb capacity

Honeymoon Operation – Processing Plant



Lixiviant and ion exchange

Uranium-bearing pregnant lixiviant is pumped from the wellfields to the plant, where NIMCIX columns load uranium onto resin and the barren solution is returned to the wellfields.

Elution, precipitation and thickening


Loaded resin is eluted to strip the uranium into a concentrated solution, which is then precipitated and thickened to produce a uranium slurry.

Drying and packing

The slurry is dewatered by centrifuge and calcined in the kilns to produce a dense uranium oxide, which is drummed on site ready for dispatch to customers.

Honeymoon Operation

Key Stages of the Operation

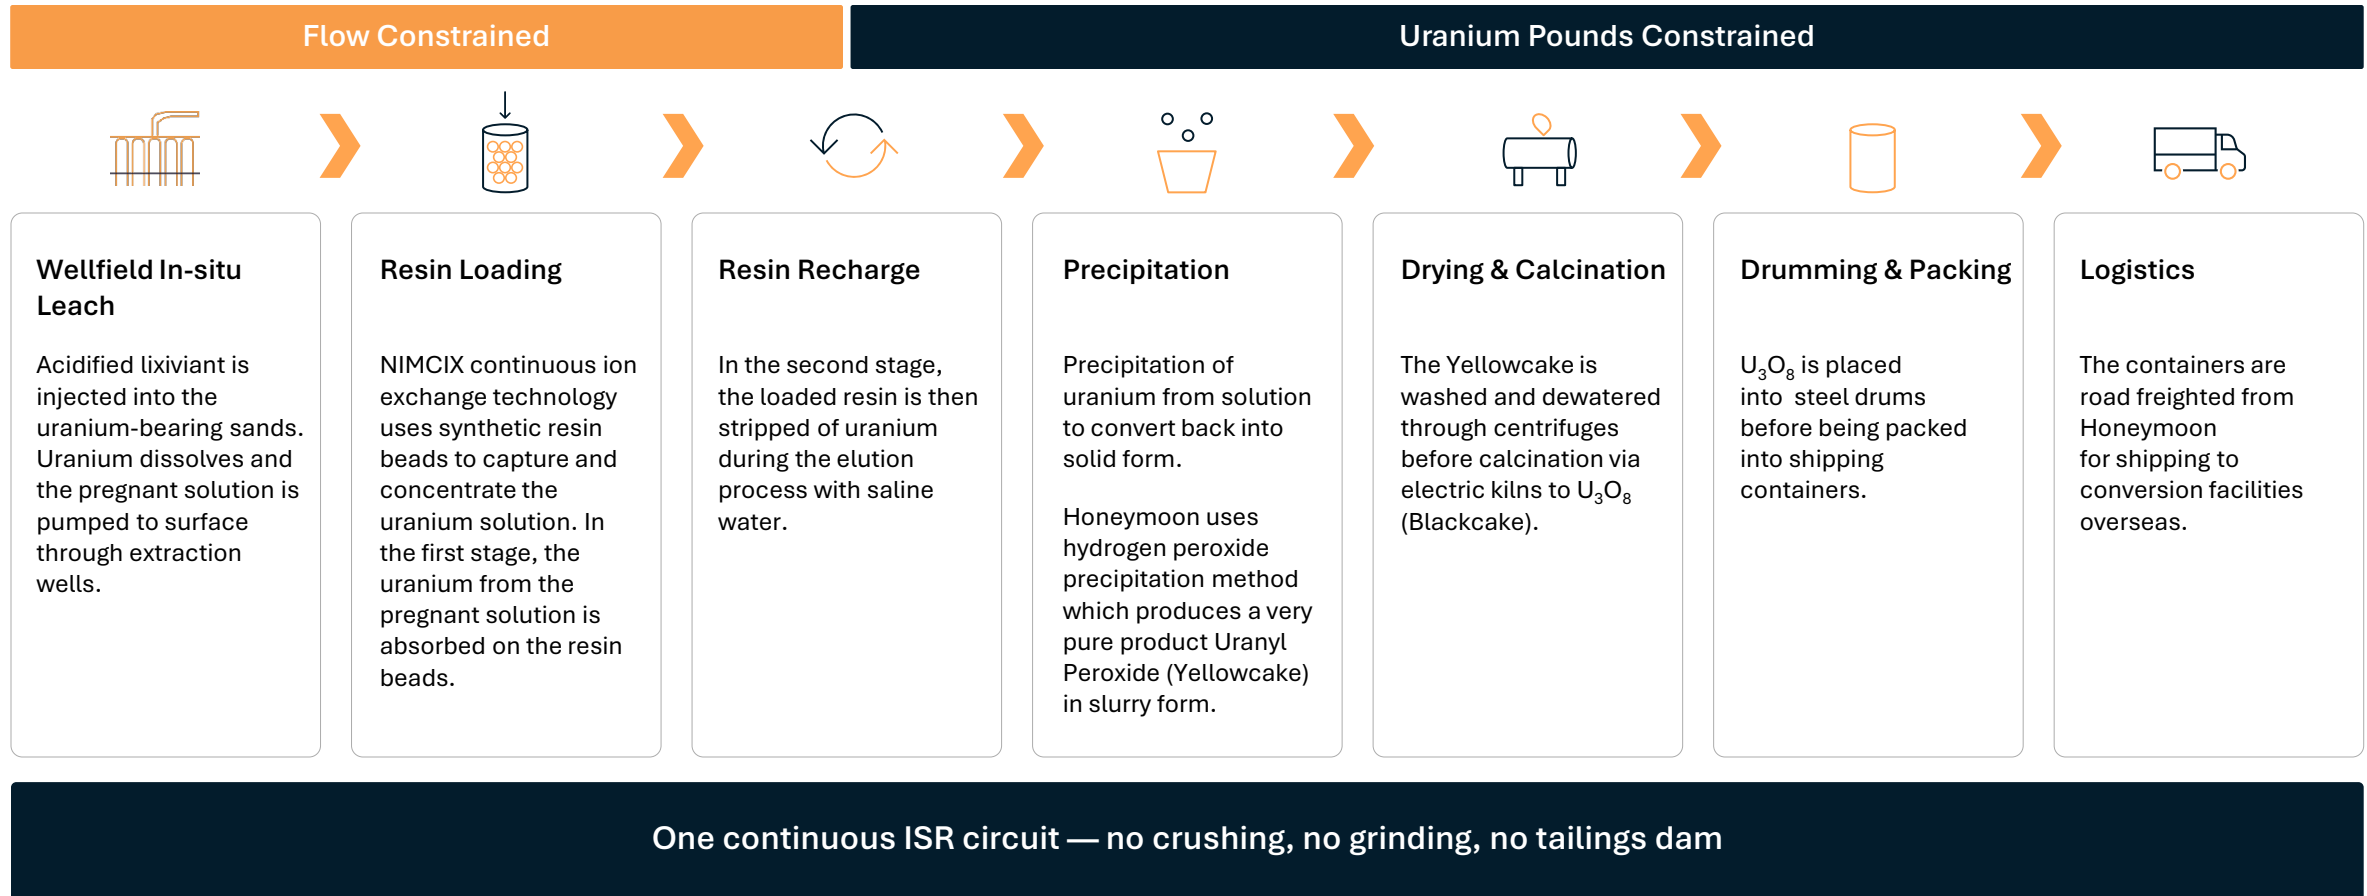

Plant and Supporting Infrastructure

Water Treatment Plant



Key enabler of wellfield development - Supplies RO permeate for wellfield conditioning and process use; capacity and availability set the rate new wellfields come online.

Eight wellfields per year - The life-of-mine plan assumes around eight new wellfields annually, each conditioned over approximately 45 days.

Established treatment process - Neutralisation, softening and reverse osmosis; permeate is reused across the plant and wellfields, with RO reject sent to the Liquid Disposal Pond.

Debottlenecking of Existing Plant - Debottlenecking the existing plant through pumped clarifier transfers, dosing and RO manifold upgrades and a new CIP system, lifting treated water to about 130 m³/h (target completion – Q4FY27).

Second Water Treatment Plant - BLS bleed preconditioning plus a duplicate neutralisation and softening train lift RO feed to 300 m³/h, producing around 210 m³/h of permeate (target completion – Q3FY28).

Optimisation of ramp-up - Wellfields have averaged around 0.7 pore volume equivalents of flushing against the 1 PVE assumed for NFS and options to accelerate development of the second water treatment plant.

Upgrade Strategy

Proposed Upgrades and Plant Layout

Stage 1 — Existing Plant Optimisation

Near-term debottlenecking; treated water to ~130 m³/h

- Clarifier overflow gravity launders converted to pumped transfer
- Gypsum return line to the softener for seeding
- Dosing systems upgrade
- New RO manifold to increase RO feed capacity
- RO turbocharger replacement
- New clean-in-place system with high-flow backflushing
- Additional raw-water supply
- Increased liquid-disposal pumping and bore capacity
- Operational Q4 FY27



Staged delivery - Stage 1 is being implemented in parallel with the Stage 2 study to lift permeate availability now; Stage 2 delivers the sustainable capacity required for the life-of-mine production schedule.

Upgrade Strategy

Proposed Upgrades and Plant Layout

Stage 2 — Major Capacity Expansion

RO feed sustained at 300 m³/h, ~210 m³/h permeate

- BLS bleed preconditioning and iron recovery circuit, reducing ferric sulphate imports
- Duplication of neutralisation and softening unit operations
- Increased supply from recovered process streams and raw water
- Upgrades to water supply, residue management and liquid-disposal infrastructure
- Operational Q3 FY28


Existing WTP

New neutralisation
& softening train

BLS bleed
preconditioning /
iron recovery

RO plant

Raw water &
disposal bores

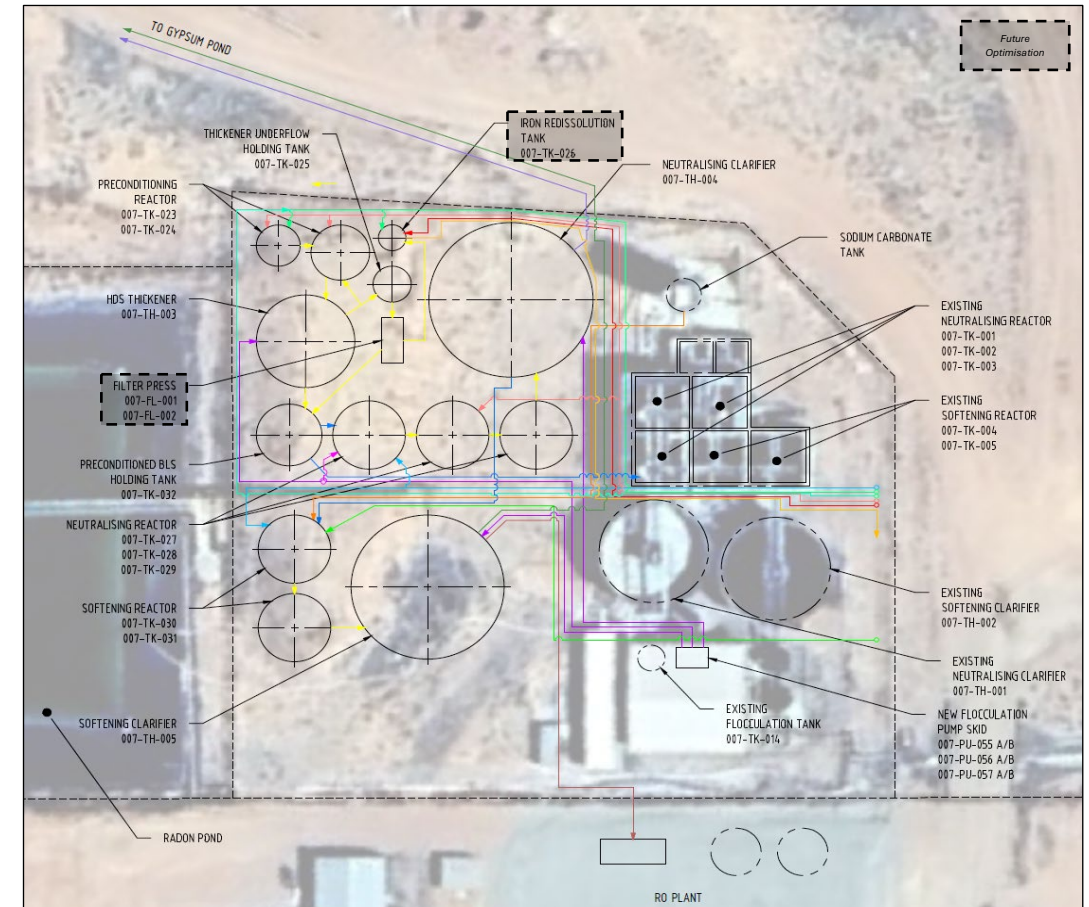

Indicative upgraded plant layout

Programs of work to improve operating costs and productivity

Business Improvement

Reagent and chemistry

Wellfields

Processing circuit and availability

Delivered

Lixiviant optimisation

Acid and oxidant dosing tuned to improve leaching

Precipitation control logic

Optimised control lifts yield and cuts reagent use

Ferric availability and ORP control

Stable oxidant levels sustain leach performance

IX conversion cycle timing

Optimised cycle length eliminates reagent waste

Underway

Carbonate recycle in IX

Recover and re-use carbonate from the IX circuit

Direct reagent dose at wellhouse

Dose at point of use to cut losses and reduce handling

Ferric recovery

Recycle ferric from bleed, offsetting consumption

Reagent inventory management

Smarter ordering and storage to reduce working capital

VSDs in wellfields

Variable speed drives trim power and improve flow control

First fill recovery

Recover solution from initial wellfield fill

Wellfield preparation

Standardised drill and commissioning practice

Infrastructure re-use

Redeploy plant and pipework across new wellfields

Centralised filtration

Single filtration point simplifies the flowsheet

Capacity and reliability upgrades

Minor capital to debottleneck capacity and lift availability

Road access

All-weather access reduces weather-related downtime

Continuous improvement in our safety culture

Safety, Health and Wellbeing



TRIFR/LTIFR

- Elevated TRIFR rates reflecting the safety maturity of the operation at Honeymoon (and relatively low hours worked).
- Focus on improved reporting and transparency since transition to operations.




Safety Improvement

- ISO 45001-aligned Health and Safety Management System in place.
- Implemented online health, safety hazard and incident management system.
- Focus on Safety Critical Risks and Control (prevention of high-consequence events).



Behaviours and Culture


- Safety metric (both leading and lagging) targets are integrated into all KPI frameworks.
- Direct leadership accountability with collective responsibility.
- Learning and improvement culture (e.g. workforce safety committee, investigations, open reporting, corrective action management plans).

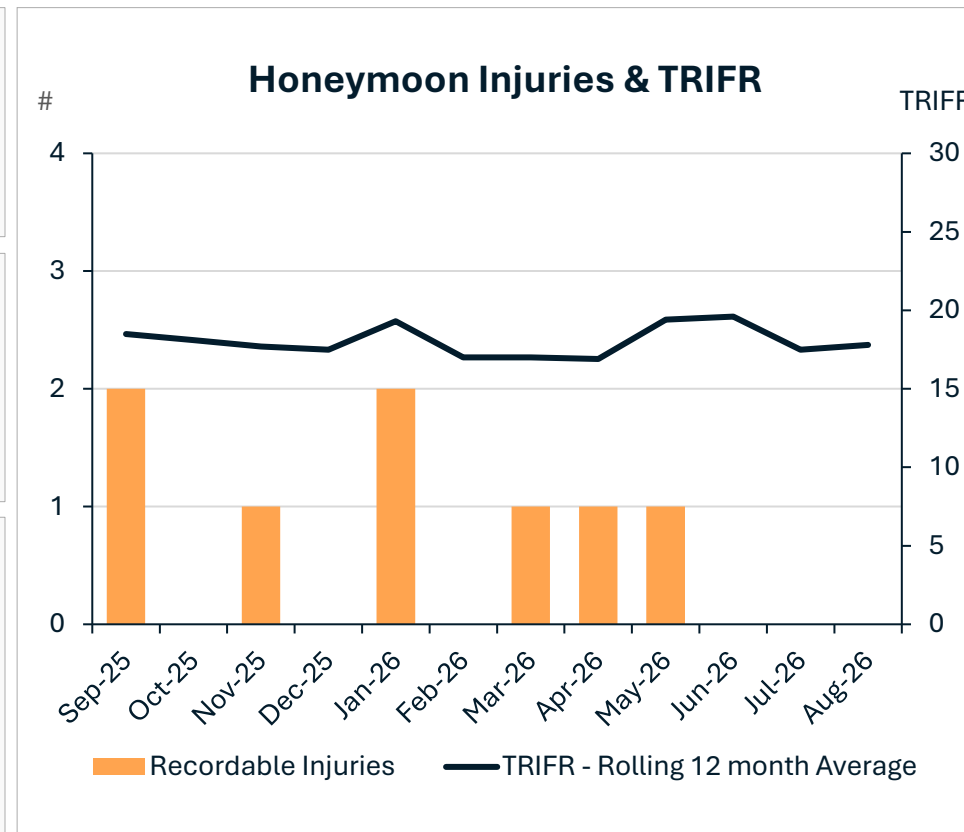

A genuine commitment to provide a safe, healthy and supportive workplace for all our people

Wellfield design

From Flow and Reactivity to Uranium Recovery

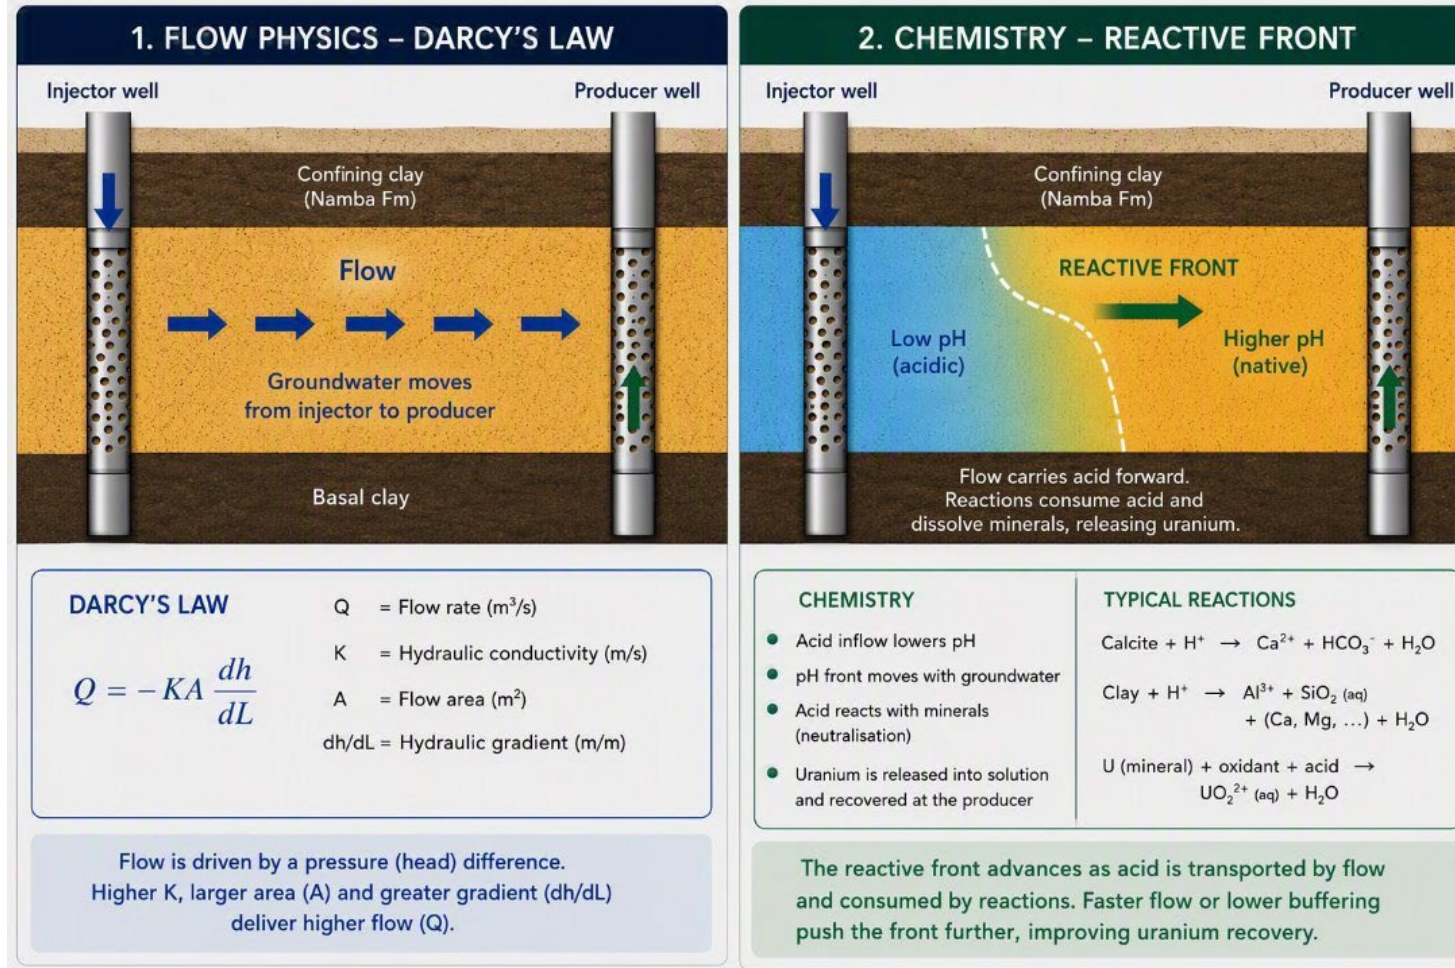

Wellfield design Fundamentals

How do we determine an “optimal wellfield design”?

By integrating reservoir geometry, hydraulics, resource distribution and geochemical reactivity, constrained by extensive field and production data

1. Reservoir geometry

Reservoir architecture, mineralised horizons, thickness, confinement and vertical connectivity.

Where can the solution flow?

2. Hydraulics

Permeability, porosity and hydraulic connectivity control flow distribution and residence time.

How does the solution move?

3. Resource distribution

Uranium grade and inventory vary spatially within the permeable reservoir.

What uranium can the flow contact?

4. Geochemical reactivity

Reactive minerals control acid consumption, acidification efficiency and uranium dissolution.

How does the reservoir react?

The optimum design must balance all four components, despite spatial variability, uncertainties and limited direct observation

Extensive field characterisation and operating data allow this subsurface complexity to be captured and managed through calibrated reservoir modelling. A large operating data set is available:

4 Uranium One wellfields (2011–2013) + 6 Boss Energy wellfields currently operating

Wellfield design Fundamentals

What do we seek to determine?

The objective is to define the physical wellfield configuration and operating parameters best suited to the local reservoir characteristics

Wellfield configuration



1. Pattern type

5-spot, 7-spot or locally adapted geometry.



2. Pattern size

Injector-to-producer spacing.



3. Well completion

Screen length, position and management of stacked horizons.

Operating conditions



4. Well flow rates

Injection, production, pressure response and hydraulic balance.



5. Injection chemistry


Acid and oxidant concentration.

Reservoir modelling combines local reservoir characteristics and design parameters to test multiple scenarios, compare performance and determine the preferred wellfield design.

Reactive Transport Model

A mature, widely used approach to complex subsurface systems

Developed over more than four decades, RTM is used across environmental, energy and mining applications to couple fluid flow with geochemical reactions.


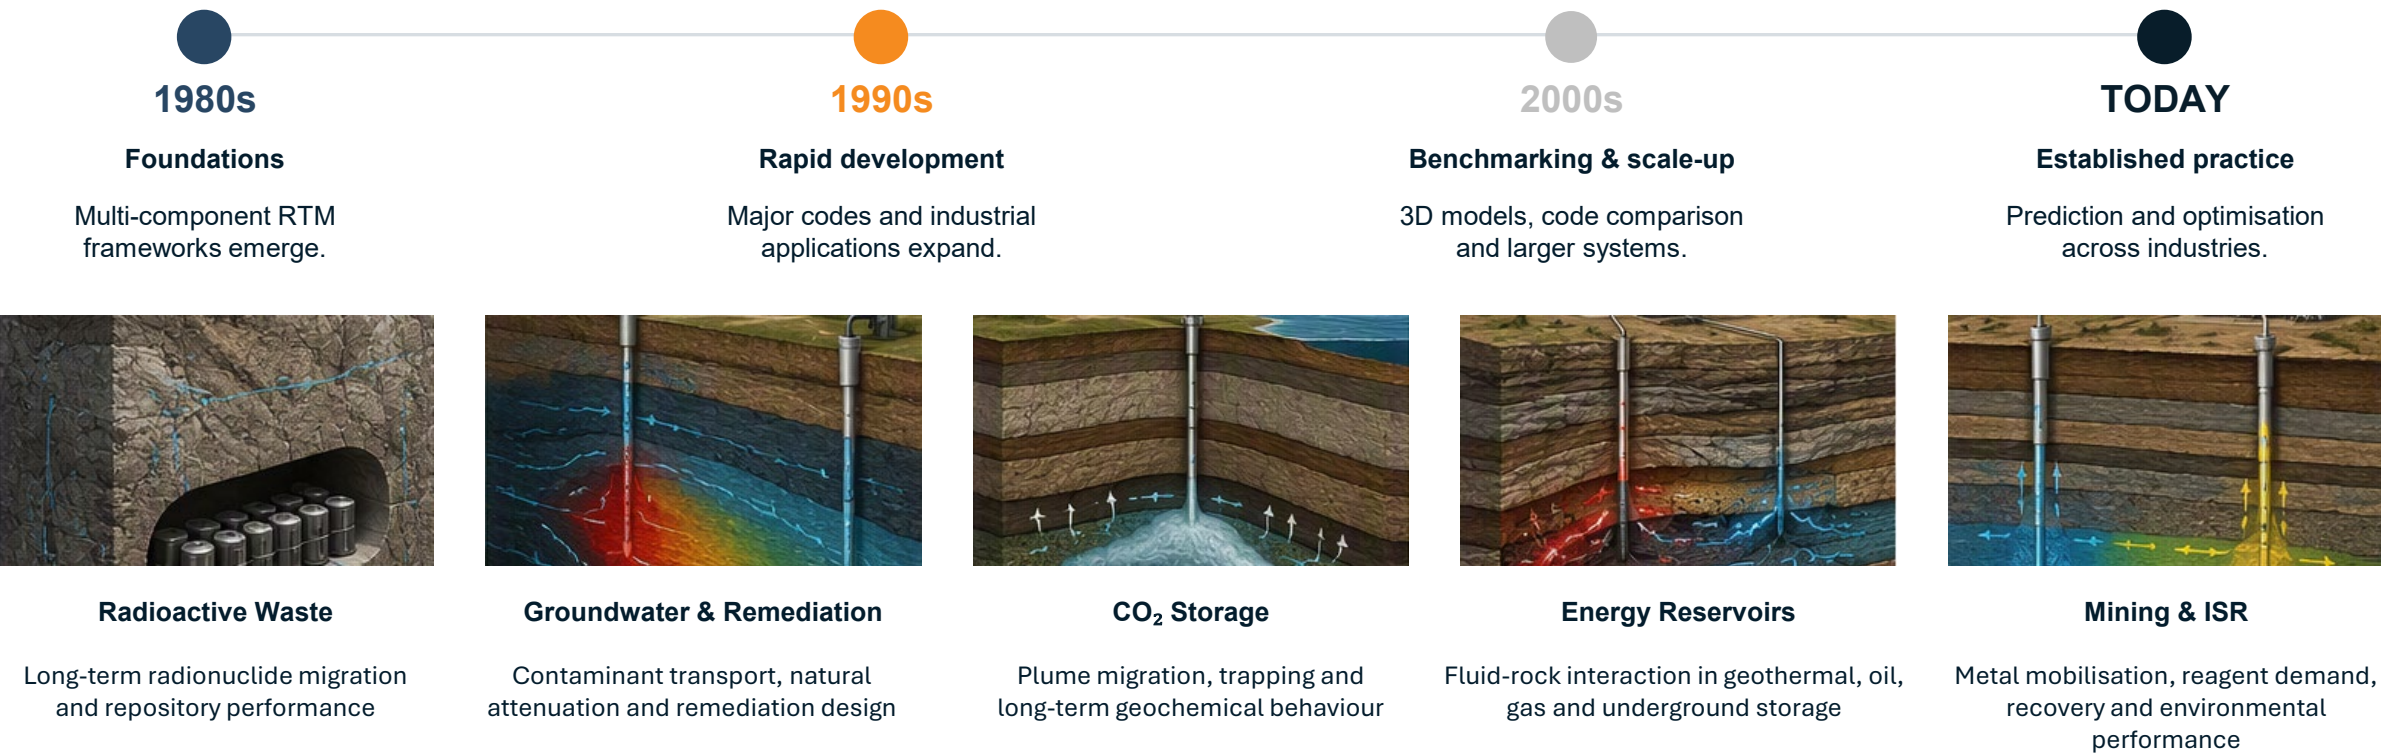


Honeymoon Application At Honeymoon, this proven approach is applied directly to field data to improve wellfield design and production forecasting

Advanced ISR Mine Planning

RTM links the resource model directly to wellfield performance and the life-of-mine schedule

A time-dependent, three-dimensional framework converts local reservoir characteristics into wellfield-specific production responses

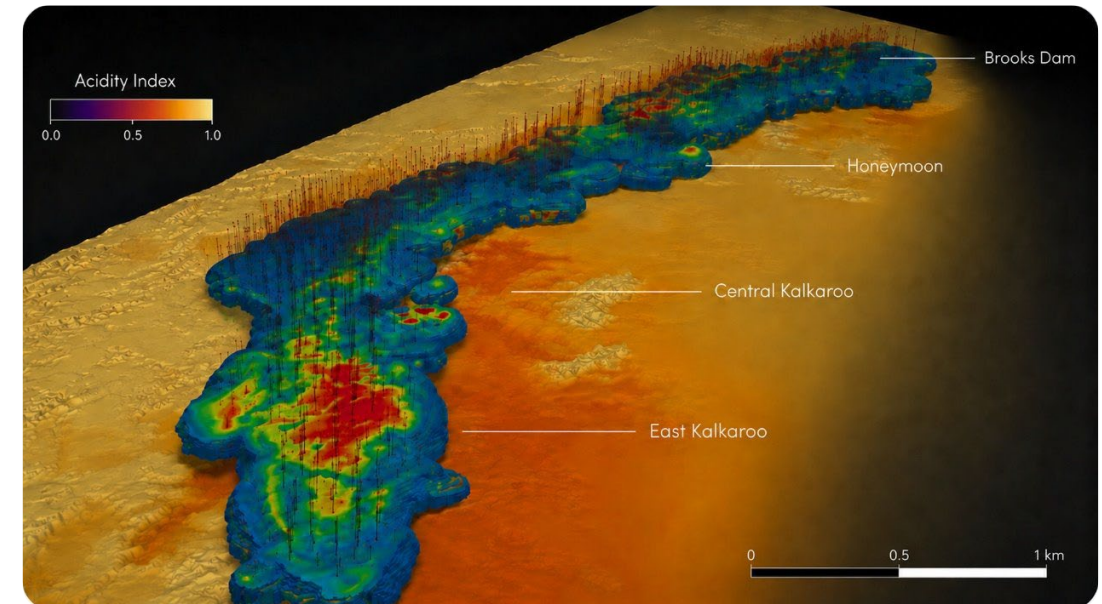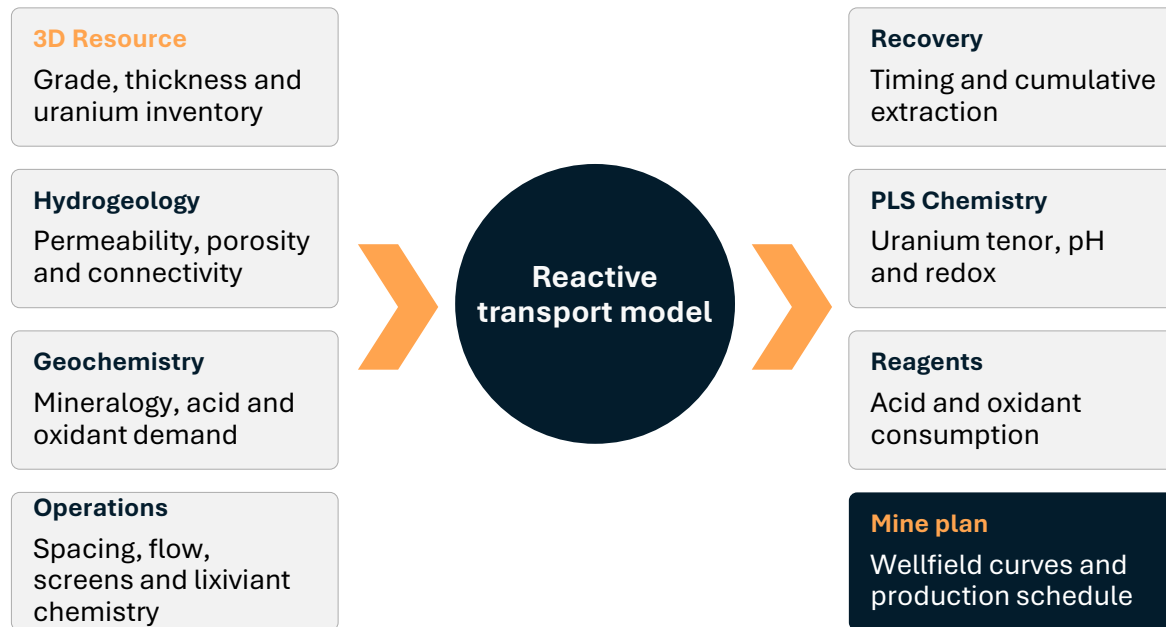


Wellfield-specific forecasts replace generic recovery assumptions, providing a stronger technical basis for design and mine planning

A digital twin of the reservoir

Seeing inside the reservoir as the wellfield evolves


The reactive transport model tracks how the uranium inventory is progressively contacted, dissolved and recovered throughout the three-dimensional reservoir

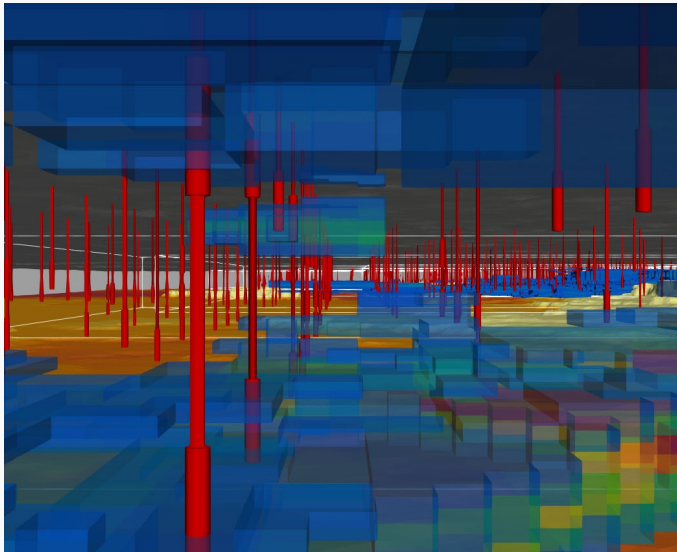

Initial Uranium Resource

t = 0


Wells positioned within the initial uranium distribution

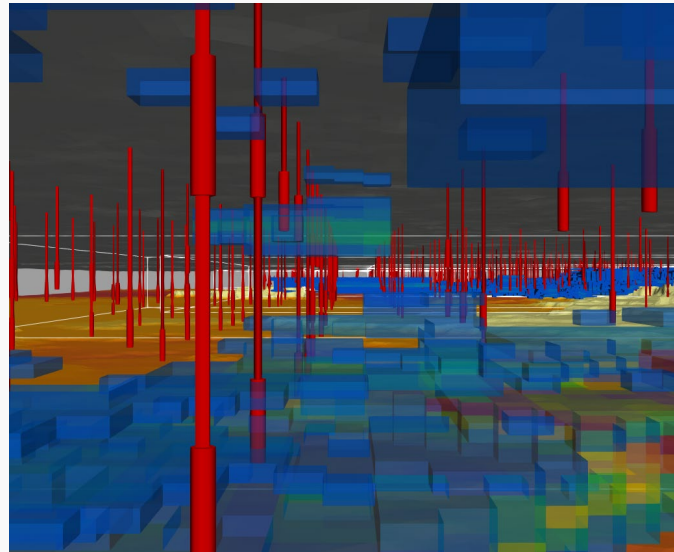

Early resource depletion

t = 6 Months

The most accessible uranium close to the active flow paths has been dissolved and recovered

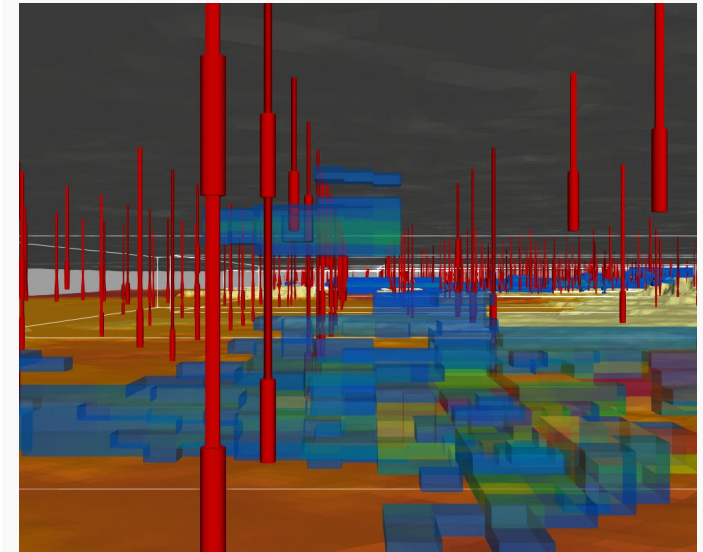

Residual uranium inventory


t = 18 Months

Remaining uranium located in less accessible areas or outside the volume effectively contacted by the wellfield

The digital twin shows not only how much uranium is recovered, but where depletion occurs and where residual uranium remains within the reservoir.

Calibration against production data

The calibrated model reproduces the overall mine production response

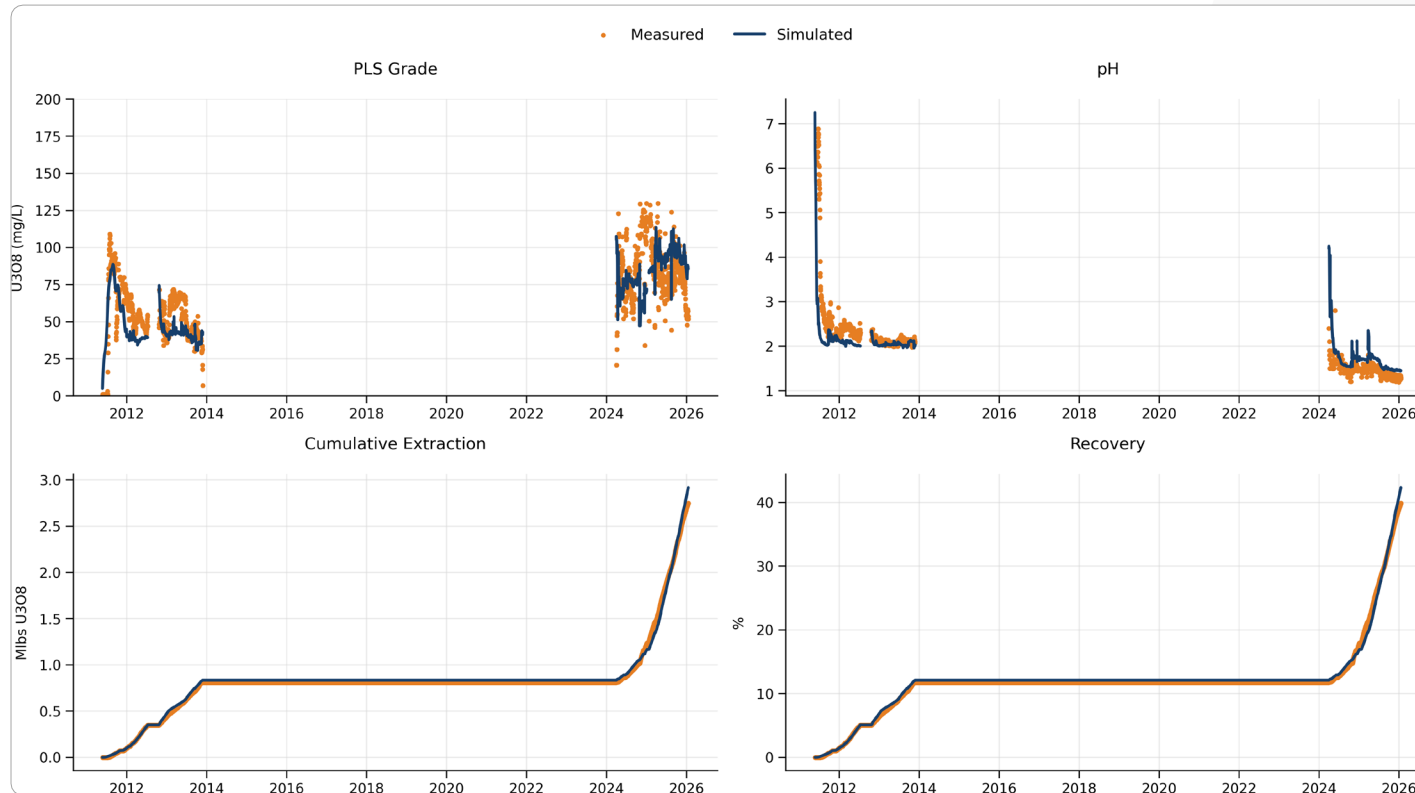

A robust calibration

An excellent match is achieved across two contrasting operating periods, covering different wellfield geometries, conditioning strategies and acidification approaches

pH response

The pH response, a key indicator of wellfield conditioning and performance, is consistently reproduced.


Leaching

PLS uranium grade, cumulative production and recovery are also closely matched across both operating periods

The multi-response match across different wellfield designs and operating strategies demonstrates a robust calibration suitable for predictive design evaluation.

Calibration against production data

The calibration captures uranium production across individual wellfields

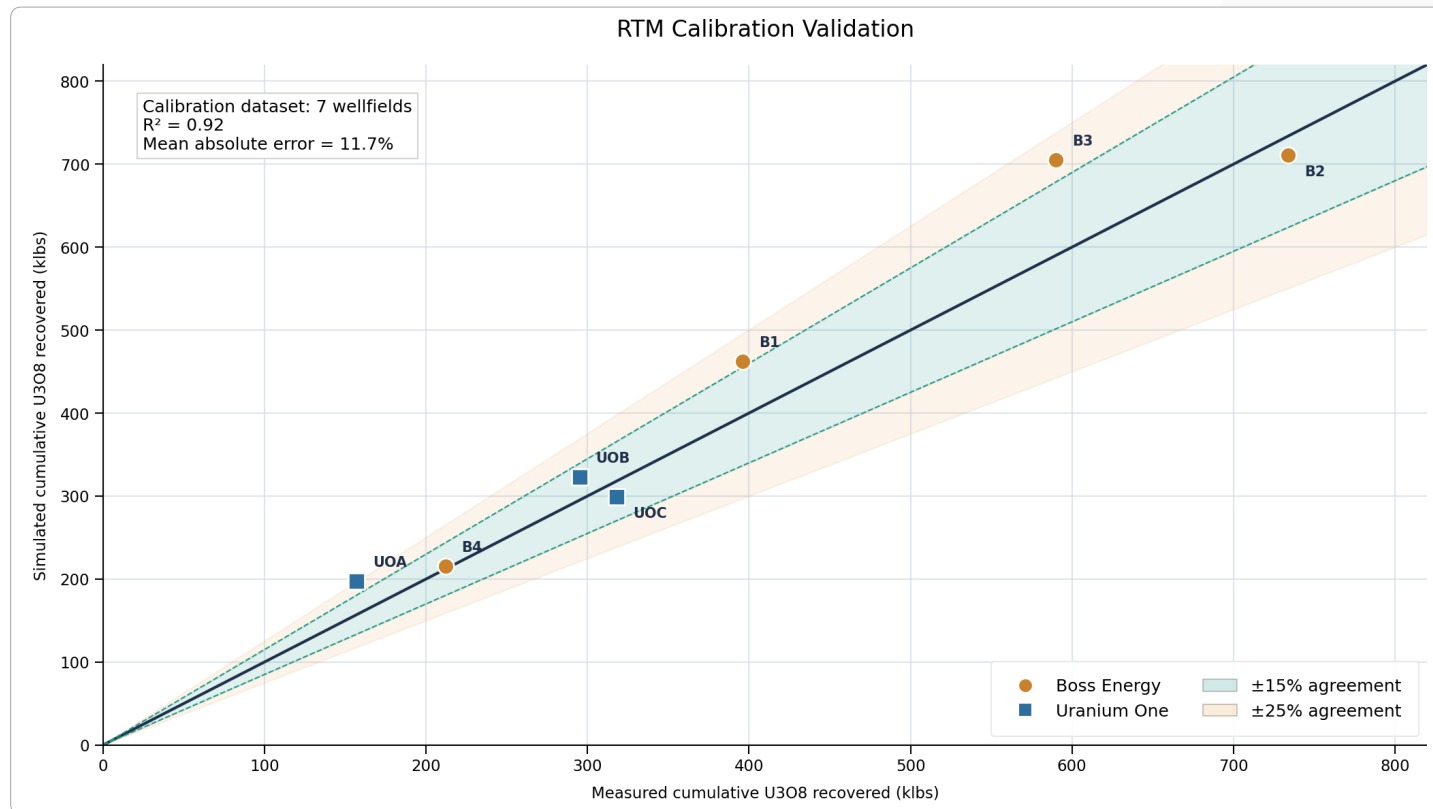

Robust at the individual wellfield scale

The calibration remains robust when moving from the aggregate mine response to individual wellfields, despite differences in design, resource inventory and operating conditions.

Captures local variability

The model reproduces the different recovery responses observed across the seven calibration wellfields.

Relevant scale for mine planning

Future production is forecast and scheduled wellfield by wellfield, making this scale of validation particularly important.

This wellfield-scale performance supports the use of the calibrated model for wellfield-specific forecasting and life-of-mine planning

Deposit characteristics that enable wide-spaced wellfield design

Honeymoon Deposit Characteristics

1. High permeability and flow capacity

Operating data confirms high hydraulic conductivity



Clayey sand – limited flow




Coarse sand – fast efficient flow

Sustained flow rates over greater distances give the hydraulic basis for wider injector-to-producer spacing.


40 m/day basal sand K
0.30 effective porosity
≥100 mD KSDR threshold

2. Strong lateral hydraulic conductivity

Interconnected sand bodies form a continuous flow system



Disconnected sand bodies – poor well communication



Continuous sand channels – strong well to well communication

The aquifer is laterally connected, allowing pressure and flow to propagate efficiently between wider spaced wells.

~6 km continuous strike
49 m injector to extractor
~32 m³/h average well flow

3. Laterally extensive mineralisation

Discontinuous high-grade zones occur within a continuous low-grade envelope




Continuous low-grade envelope – reliable pattern coverage

The continuous mineralised envelope links discontinuous -grade zones, allowing wider-spaced patterns to intercept mineralisation reliably

100 ppm U₃O₈ resource cut-off
600 m.ppm pattern GT minimum

4. Favourable vertical continuity

Mineralisation extends across a substantial vertical interval



Thicker ore behind the screen

Vertically continuous low-grade mineralisation, with locally continuous high-grade lenses, supports effective sweep across wider-spaced patterns.


3 stacked horizons
(at a lower cut-off grade)
1–3 levels per pattern
4 m of minimum vertical continuity

5. Favourable mineralogy

Low reagent demand; limited carbonate and reactive clay



Clay & carbonate rich sand – pH front retarded




Low-buffering sand — acid remains effective

The lixiviant remains effective over longer flow paths. Moderate oxidant demand and minimal carbonate / clay buffering promote rapid uranium dissolution.

~6 kg/t acid consumed (based on commercial production data)
~1.8% reactive smectite
~20% kaolinite, non-reactive

6. Effective confinement and hydraulic control

The Namba Formation provides effective vertical confinement



Flow remains within the ore bearing aquifer

Combined with the low natural groundwater-flow velocity, this limits dilution and enables controlled circulation at wider spacing.

0.0001 m/day Namba vertical K
up to 40 m clay confining unit
50–55 m standing water level

Wellfield design constraints

Design constraints translate the resource model into buildable wellfields

01 Pattern geometry

Injector-to-extractor spacing

35 – 70m

m

Injector to producer distance used to size the five-spot patterns

Patterns per wellfield

8

#

Standard wellfield development unit used for planning and scheduling.

Lateral and vertical extension

10 ± 4

m

Effective leaching buffer applied around the wellfield footprint.

02 Resource selection

Minimum gt cut-off

600

m·ppm U_3O_8

Minimum average grade-thickness at pattern scale.

Minimum vertical continuity

4

m

At least 4 m of continuous mineralisation at ≥ 100 ppm U_3O_8 .

Minimum surface coverage

50

%

Prevents selection of isolated or disconnected high-grade mineralised zones.

03 Vertical configuration

Mining layers

1 - 3

#

Allows up to three overlapping patterns targeting separate Eyre Formation horizons.

Wellfield layer configuration

Single / Multi

Supports single-horizon or multi-horizon wellfield configurations.

Screened intervals

5 - 10

m

Target completion interval selected to contact the mineable mineralised horizon.

These constraints convert spatially variable mineralisation into repeatable, hydraulically connected and operationally buildable wellfield units.

Design Scenario Evaluation


Multiple wellfield configurations were systematically tested

Design variables

- 01 Pattern configuration**
Five-spot, seven-spot or locally adapted layouts
- 02 Well spacing**
Injector-to-producer distance and residence time
- 03 Well completions**
Screen length, position and stacked horizons
- 04 Flow rates**
Injection, production and hydraulic balance
- 05 Injection chemistry**
Acid strength, delivery and conditioning strategy

Variables are evaluated as interacting combinations, not in isolation.

Example of wellfield configurations tested

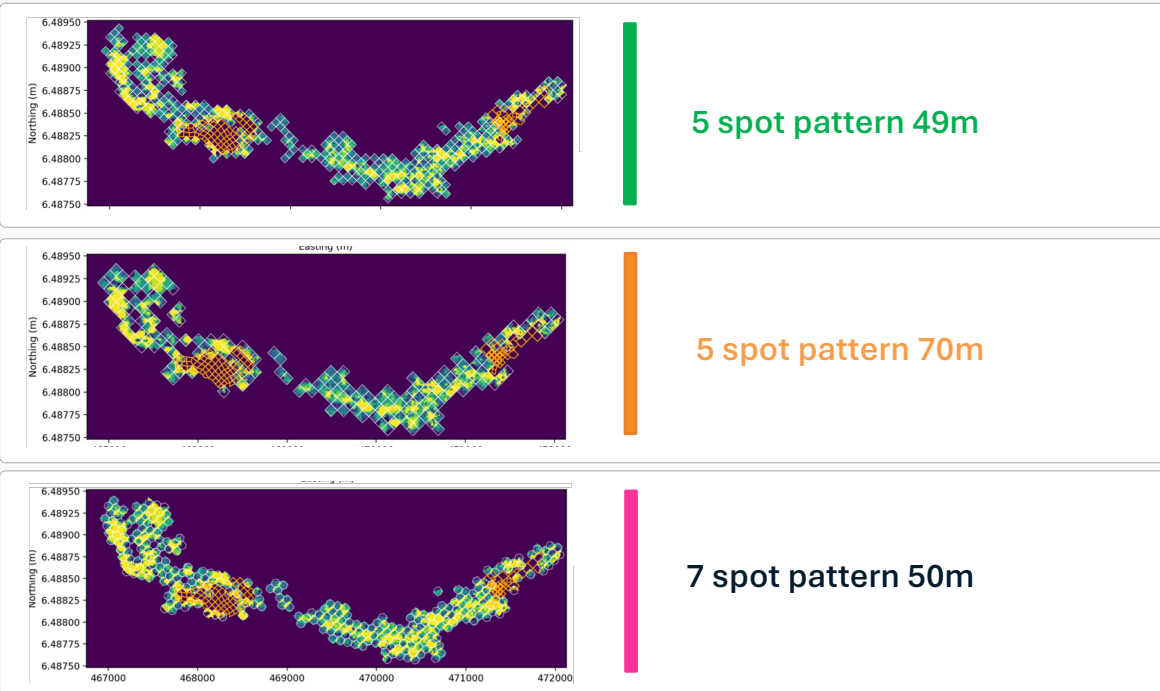

Common scorecard

Uranium recovery

PLS grade


Well count

Reagent demand

Production profile

Operability


Illustrative video of mining plan production sequence

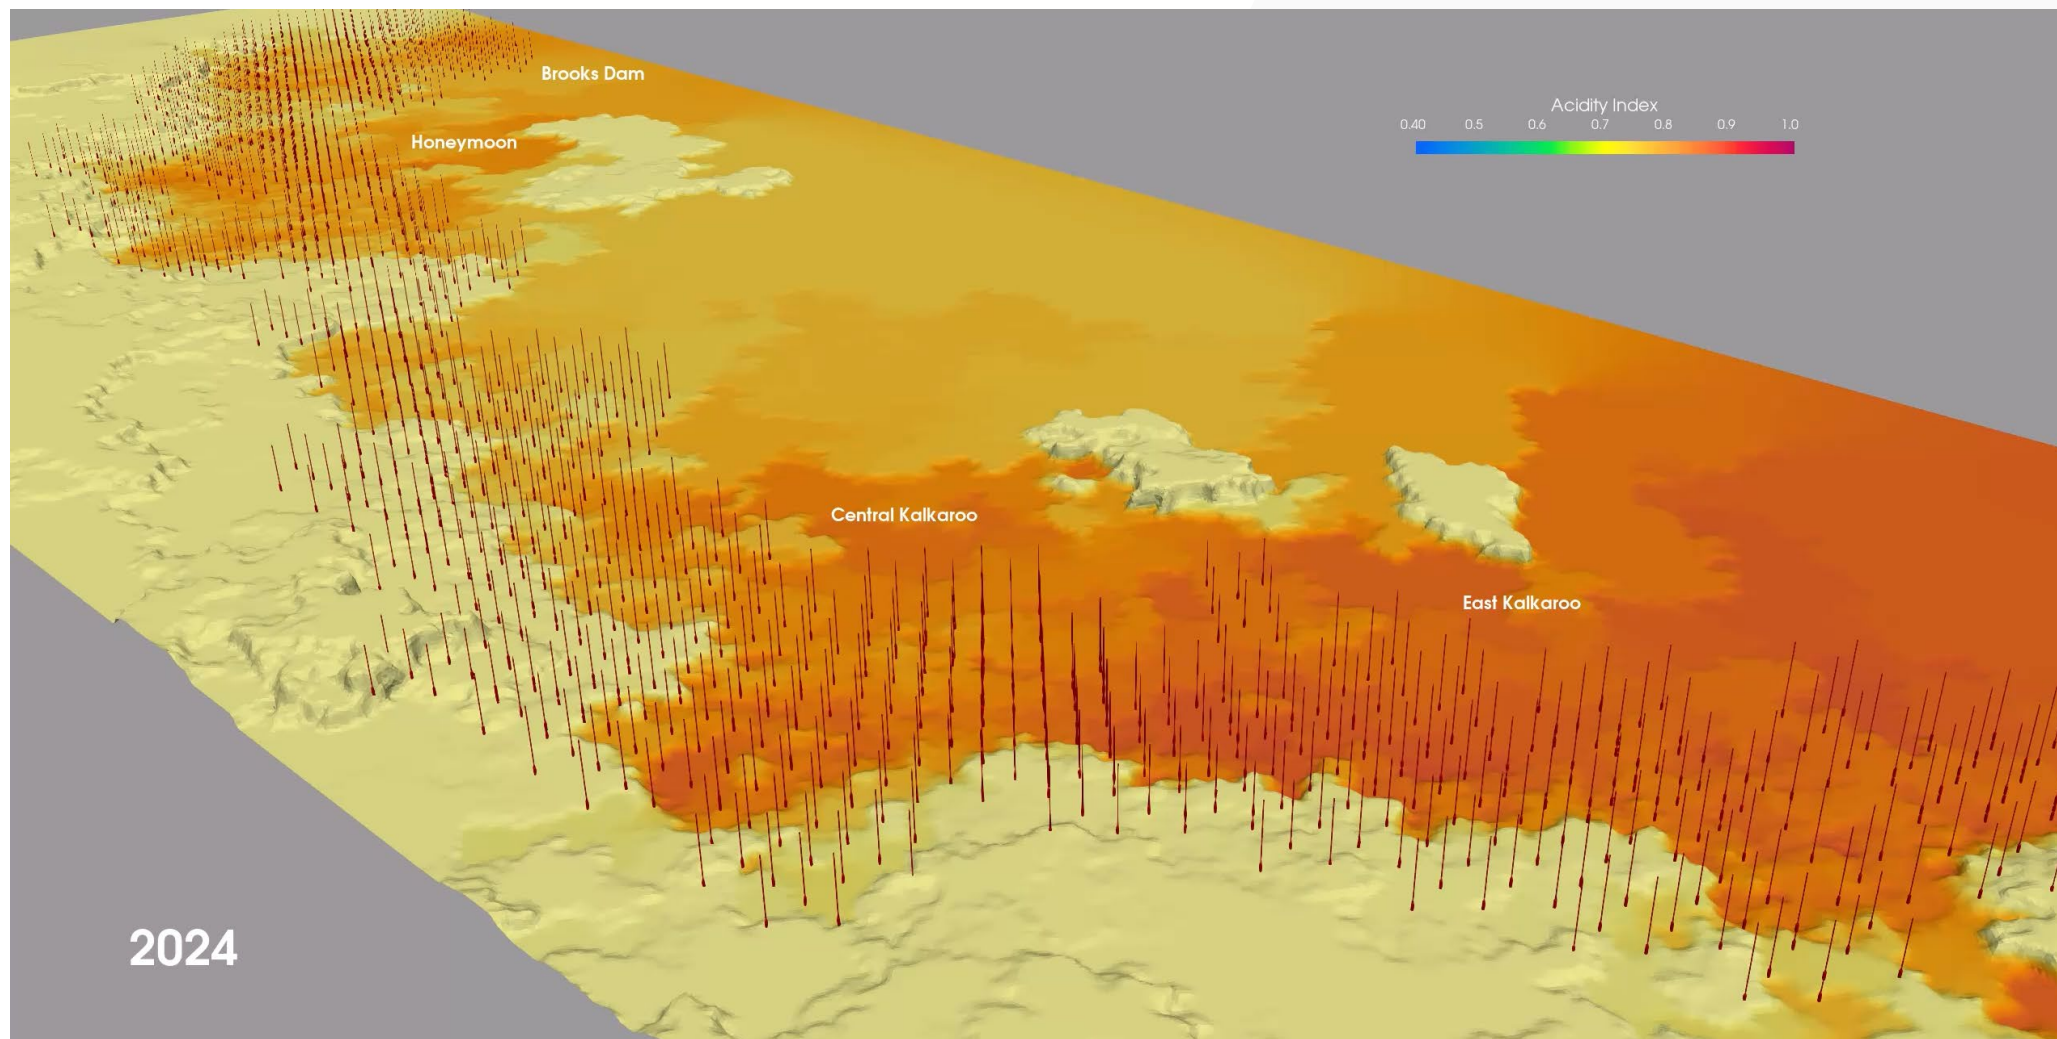


From Design to Wellfield Response

Each wellfield design produces a distinct production response


Wellfield design

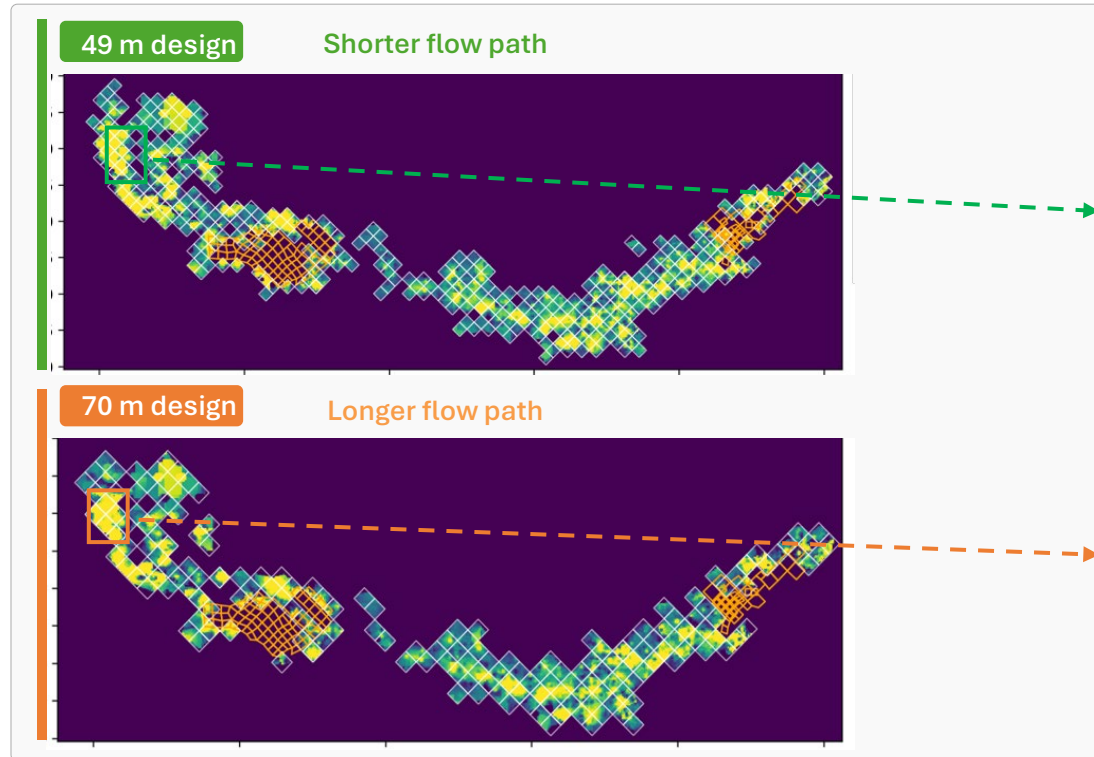

PLS uranium response by extractor

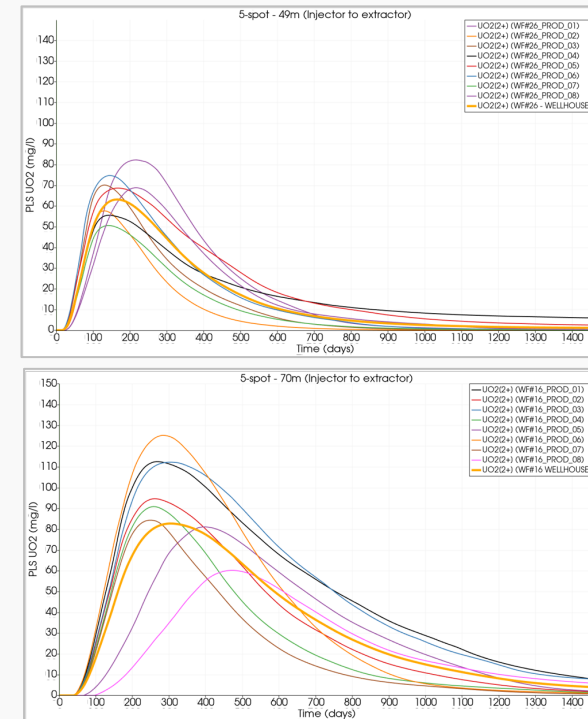


Cumulative recovery

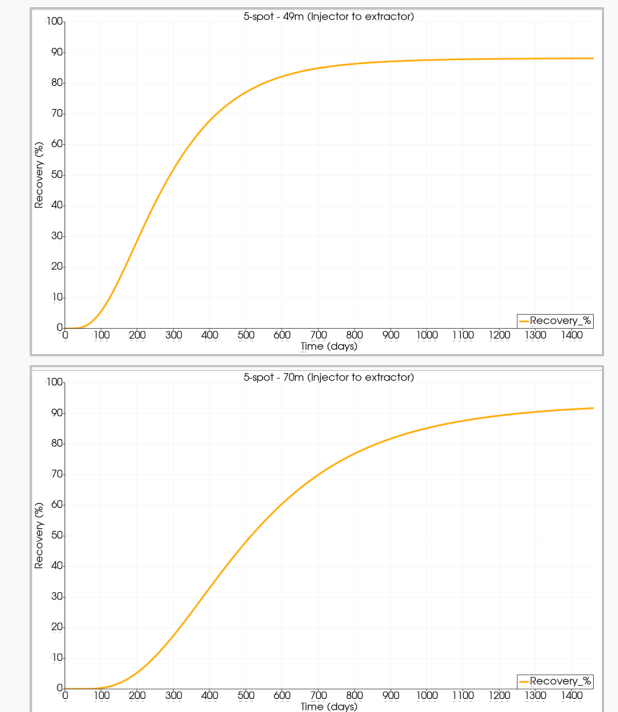

Wider spacing increases residence time and can improve tenor and ultimate recovery and delays the production response.
The preferred design balances recovery, timing and development intensity.

The wider-spaced wellfields are a more appropriate design based on the Honeymoon Deposit characteristics


Preferred balance

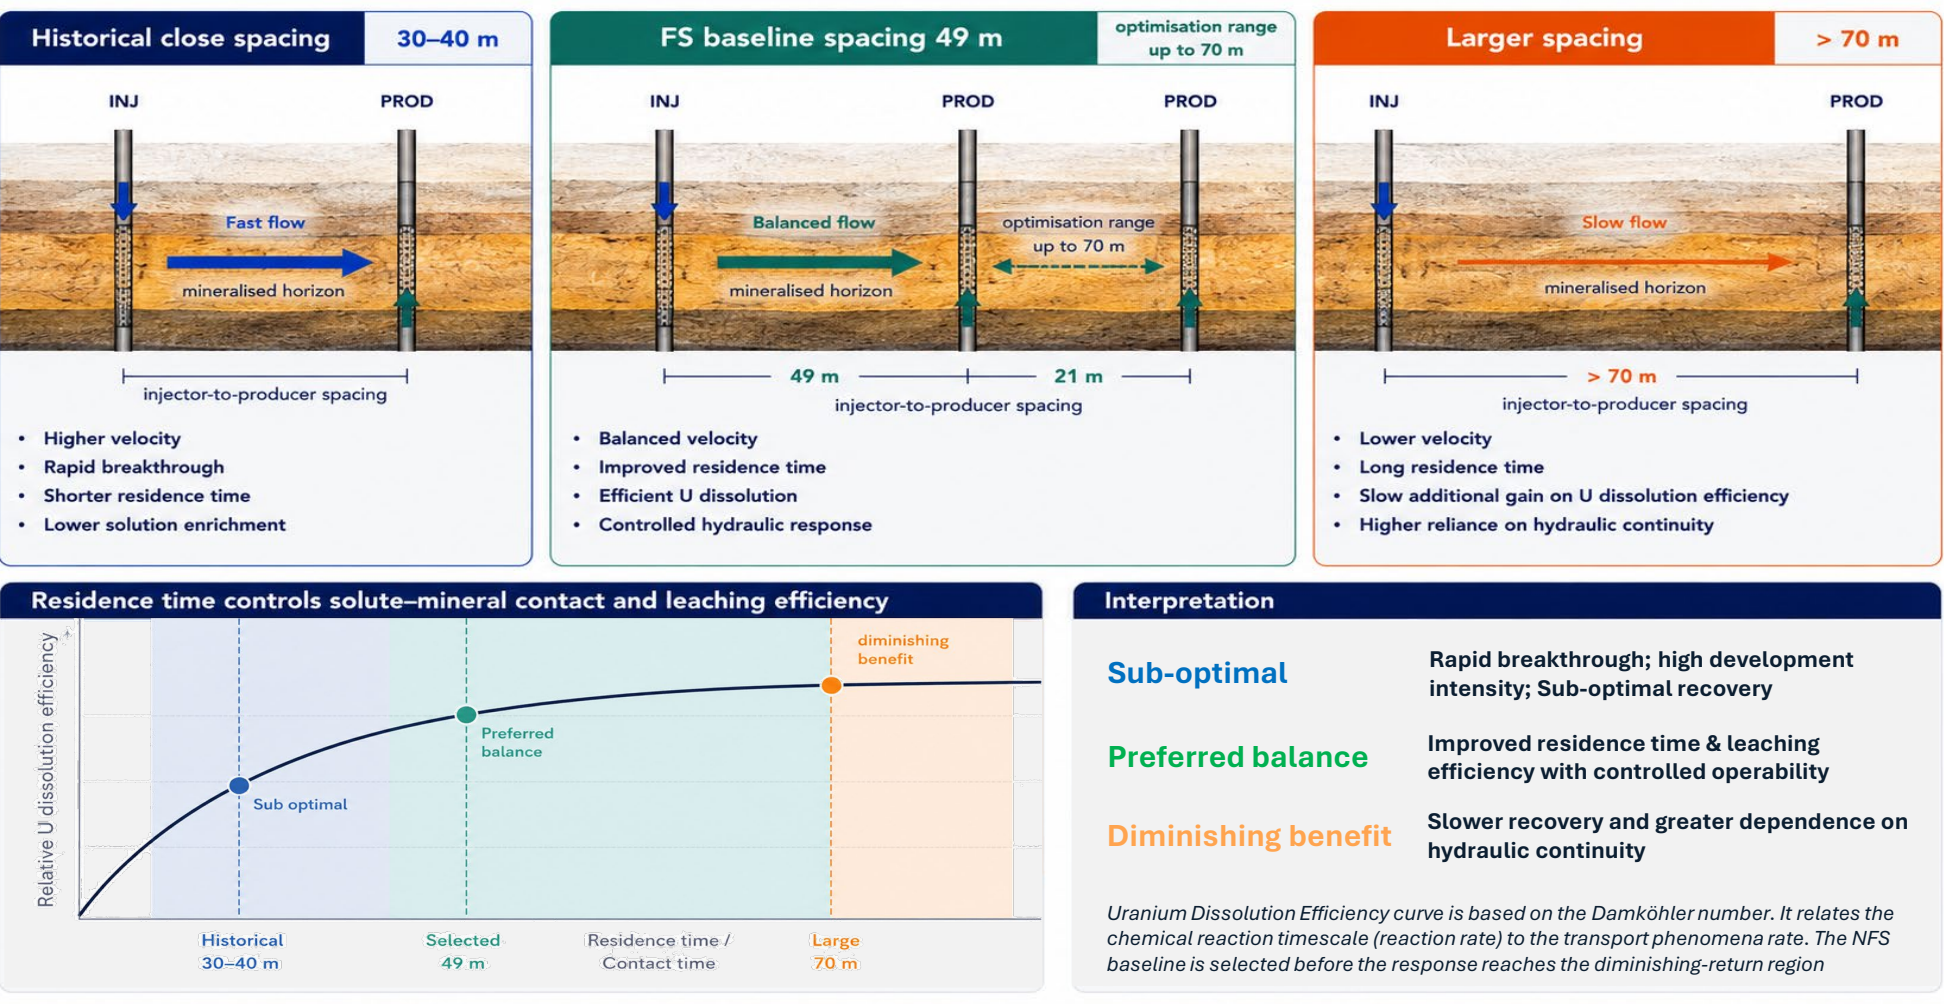

RTM quantifies the Spacing Trade-off

Wider spacing lifts recovery and cuts development intensity

The analysis tested spacing, geometry, flow and kinetics across the full planned wellfield inventory.

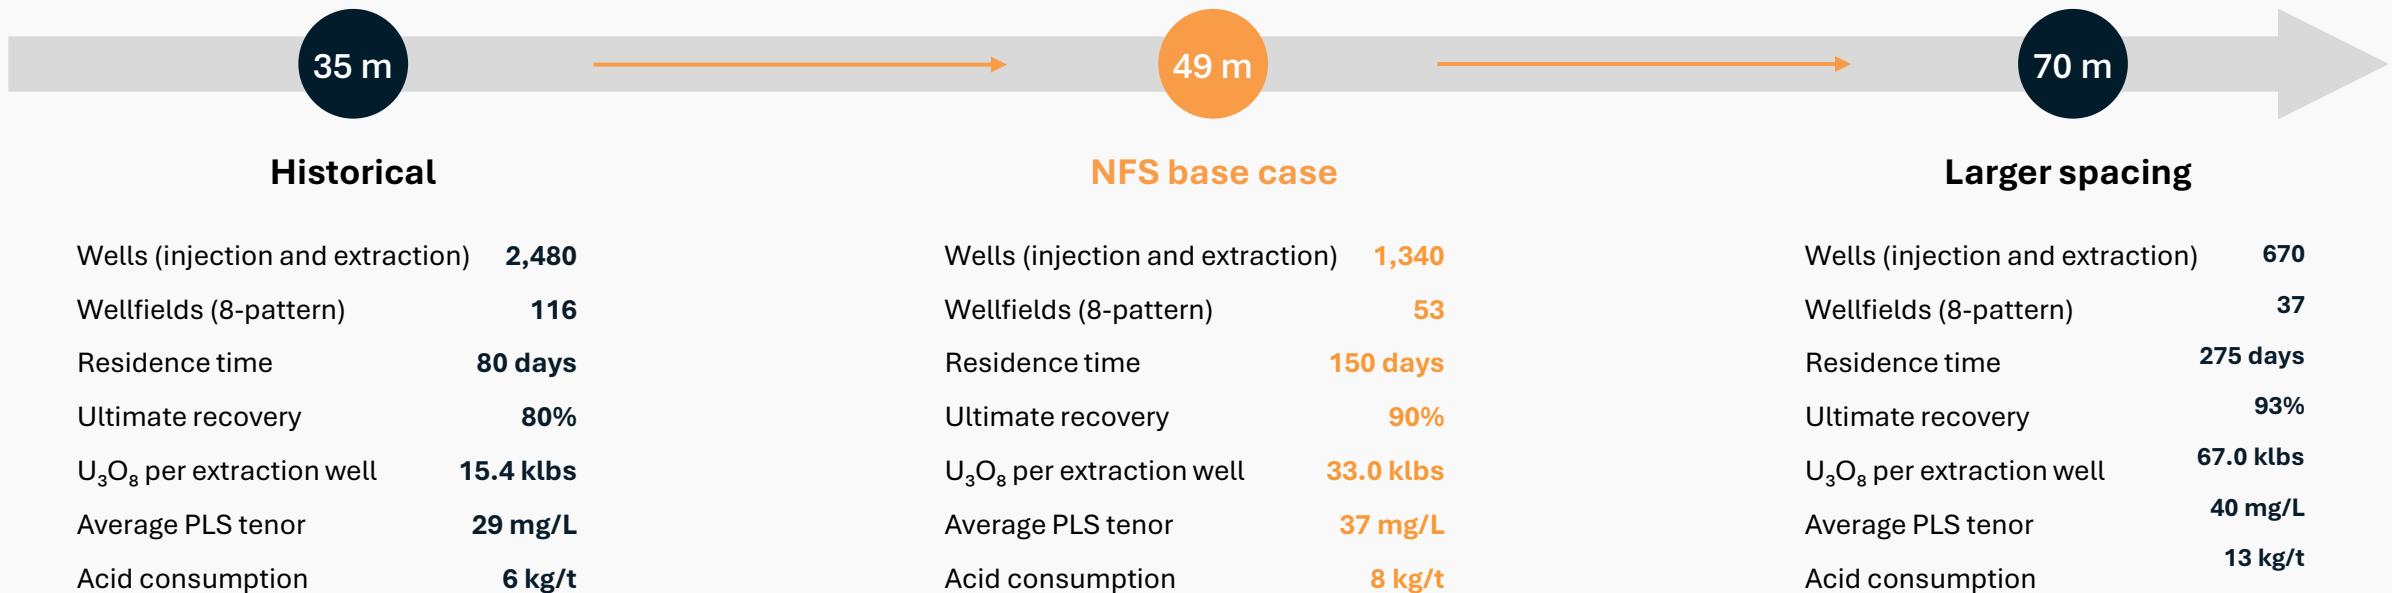

49 m NFS base case versus 35 m historical	-46%	-54%	+114%	+28%
	Wells drilled	Wellfields	U ₃ O ₈ per extraction well	Average PLS tenor


Injector-to-extractor spacing. Ultimate recovery refers to uranium intercepted by the simulated wellfields. Percentage changes compare the 49 m NFS base case with the 35 m historical design.
Refer to ASX announcement 27 August 2026 "Honeymoon New Feasibility Study and MRE Update"

Wider spacing, stronger well flow and lower acid demand than peer ISR operations

Benchmarked Against Global ISR Operations


Injector-to-extractor well spacing

Honeymoon sits within the band adopted at large ISR operations globally

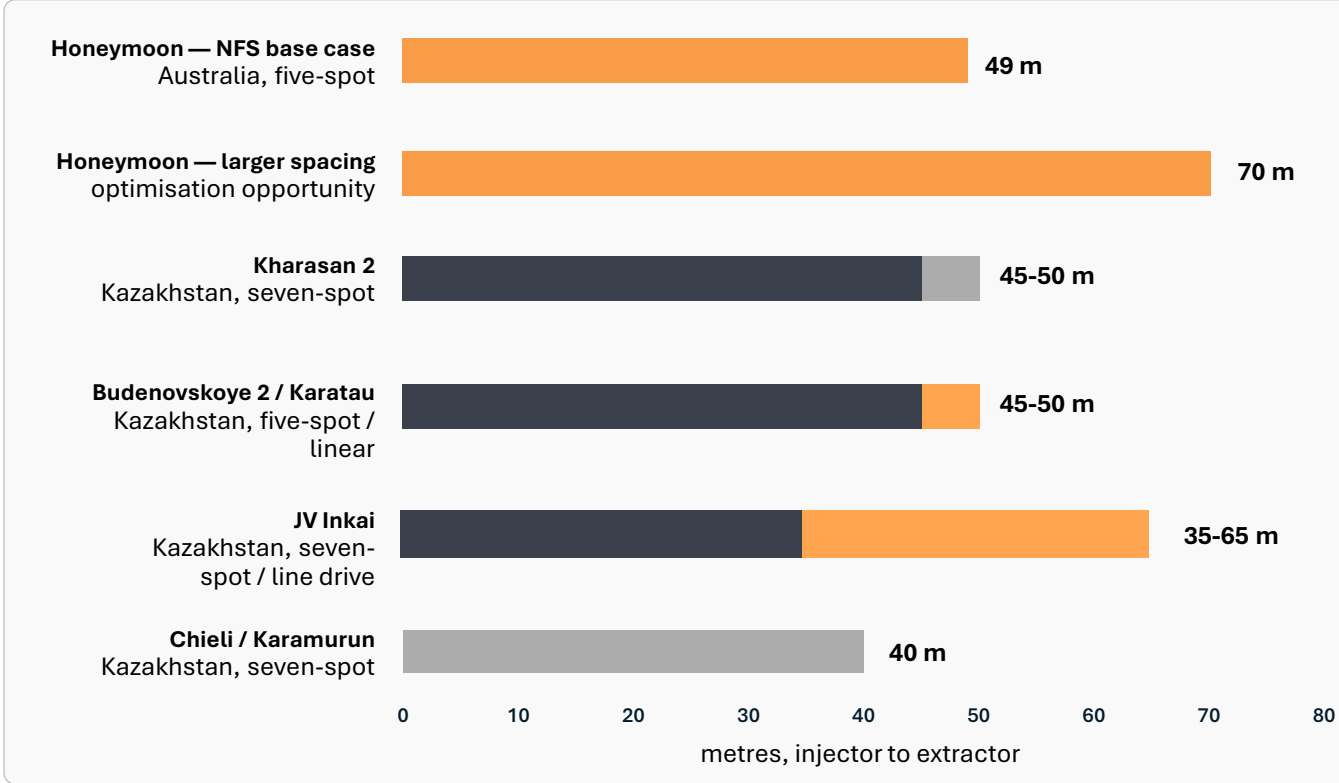

Extraction well flow


average per extraction well, cubic metres per hour

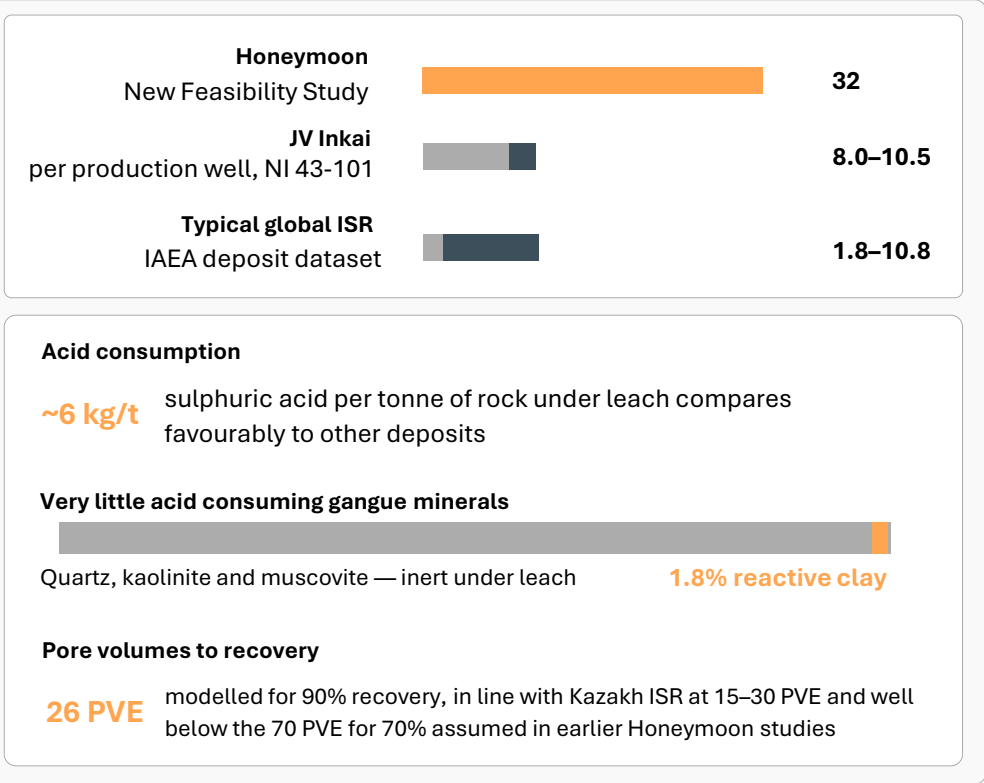

Peer data from the IAEA Nuclear Energy Series (2016) ISR deposit dataset, and the Cameco Inkai Operation NI 43-101 Technical Report (2024). Comparison is illustrative rather than exhaustive.

Field validation and continuous optimisation

The operating program creates further optimisation opportunities

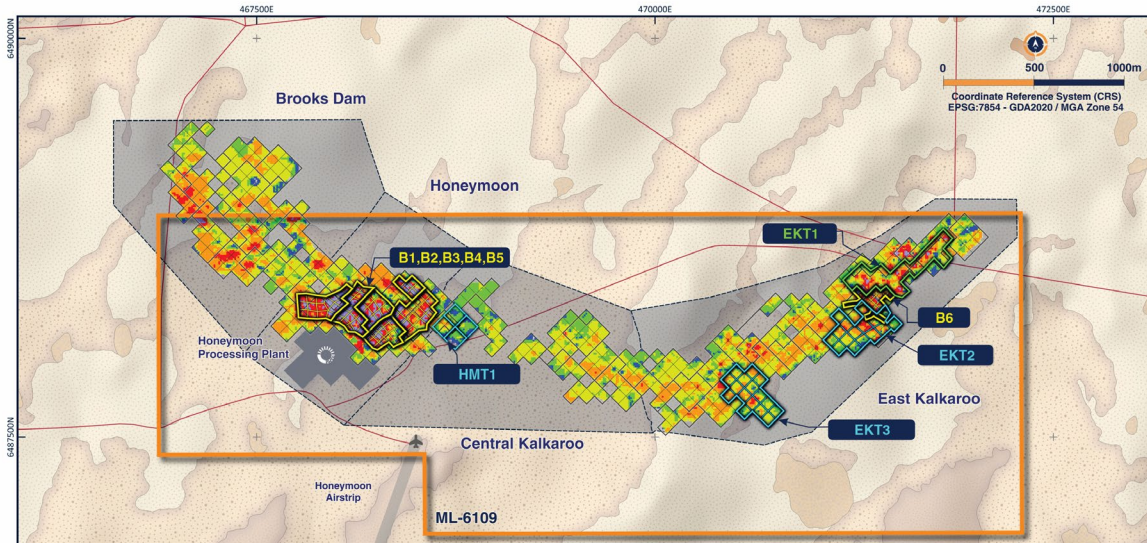

EKT2

49 m

NFS reference response

Drilled

B9 | East Kalkaroo

EKT1

58 m

Wider-spacing trial

Drilled, flushing underway

B7 | East Kalkaroo

HMT1

70 m

Wider-spacing trial

Drilled

Honeymoon

Phase	Field signal	What it tests
Transient	Acid and uranium breakthrough	Hydraulic connectivity and first-arrival timing
	pH, ORP and SO ₄ stabilisation	Average residence time and acidification / oxidation response
	PLS uranium grade build-up	Uranium mobilisation kinetics
Steady	Stable injection and production flows	Sustainable circulation and hydraulic balance
	PLS uranium grade peak and decay	Peak tenor, timing and production response
	Cumulative uranium recovery rate	Recovery kinetics versus RTM forecast

Future Optimisation Opportunities

The operating program creates further optimisation opportunities

The NFS establishes a robust design basis. Additional field data can progressively refine spacing, completions, operating strategy and infrastructure utilisation.

01 Wider and adaptive patterns

Use 60 m and 70 m field trials to assess wider spacing. Where justified, adapt pattern geometry to local permeability and uranium grade distribution rather than applying one uniform grid.

Capital efficiency

02 Multi-horizon completions

Optimise multi-horizon recovery by sequencing production and selectively re-screening existing wells, rather than drilling a separate well network for each mineralised horizon.

Capital efficiency

03 Reagent optimisation

Integrate operating response, mineralogy and geochemical modelling to refine acid and oxidant dosing while preserving acidification and recovery consistency.

Lower operating cost

04 Recovery response

Strengthen relationships between recovery, pore-volume exchange, residence time and uranium grade distribution as the production database grows.

Improved forecasting

05 Infrastructure reuse

Maximise reuse of wellhouses and tertiary infrastructure through wellfield sequencing, extensions and tie-ins where technically and operationally practical.

Capital efficiency

06 Living reservoir model

Continuously assimilate geological, hydrogeological and production data to refine future designs, reduce development uncertainty and improve LOM sequencing.

Continuous improvement

Operating data will define where wider spacing, well reuse and reagent optimisation can create value without compromising production performance.

A photograph of three workers in orange and blue high-visibility clothing and hard hats walking across a field. In the foreground, there are several large, white, flexible pipes laid out on the ground. The background shows a flat landscape with some distant structures and a clear blue sky.

Gould's Dam & Jason's Deposits

A combined 65.9Mlbs U₃O₈ across three deposits¹


Growth Beyond Honeymoon

45 Mlbs U₃O₈¹ of metal at Gould's Dam and Jason's Deposit, both considered amenable to the wide-spaced wellfield design.

Regional production hub leveraging Honeymoon's existing processing plant, infrastructure and permitting framework.

Capital-efficient growth Boss's ISR capability and operating workforce provide a low-capital pathway to future production.

Deposit ¹	Tonnes (Mt)	Grade (ppm)	Mlbs U ₃ O ₈
Gould's Dam	38.7	388	33.1
Jason's Deposit	13.3	410	12.0
Honeymoon	21.4	440	20.8
TOTAL	73.3	410	65.9

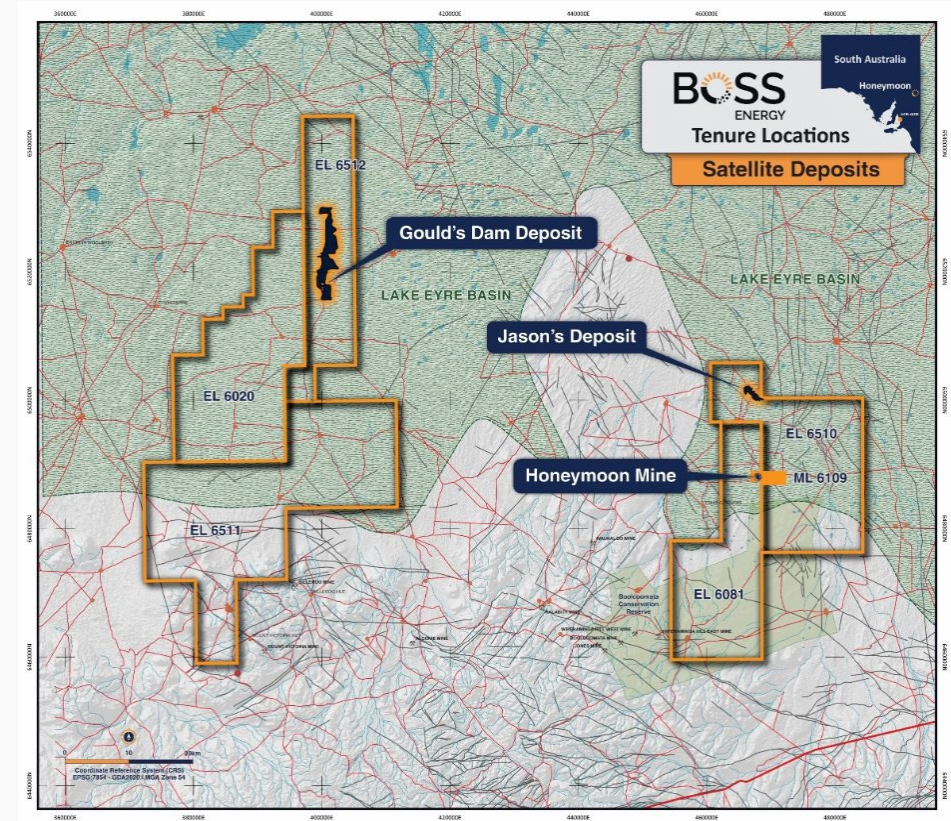


A single-platform growth opportunity 65.9 Mlbs U₃O₈¹ across three deposits within the Honeymoon District, supporting our aspiration to extend mine life and ramp up production to 2.5Mlbs pa by the early 2030s — with a low-capital-cost pathway²

1. Refer to Appendix 1 for further details of Mineral Resource classification for Gould's Dam, Jason's Deposit and Honeymoon

2. Refer to the "Aspirational Statements" section in the "Disclaimer and Important Notices" section of this presentation.

Gould's Dam

A major mineralised system

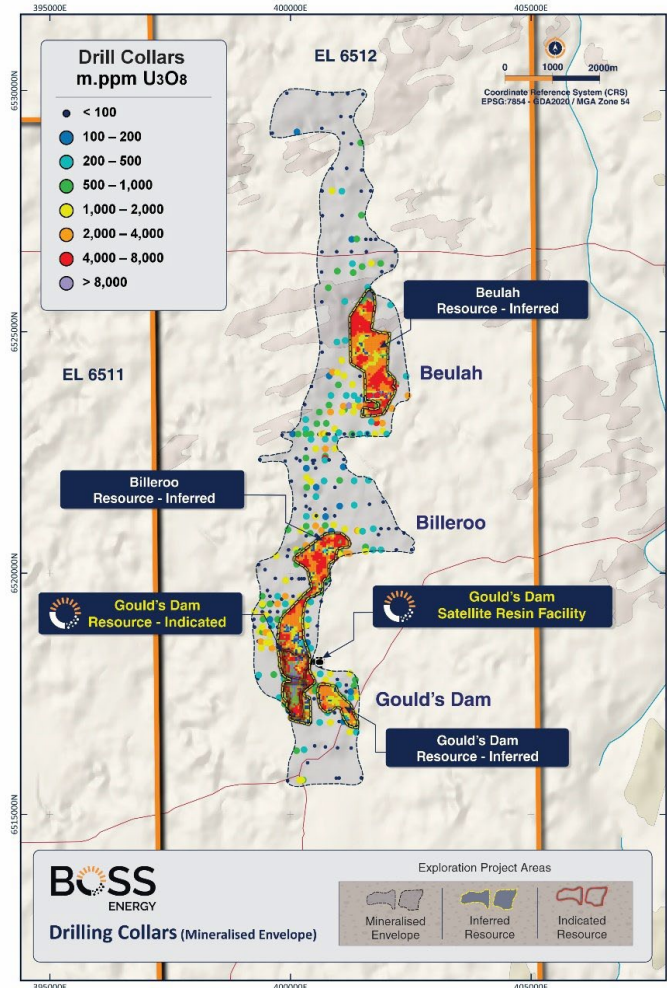

38.7Mt @ 388ppm
Mineral Resource Estimate¹

33.1Mlbs U₃O₈
Uranium Metal¹

Over 15km
Known mineralisation,
north-south

250ppm cut-off

Reported above a 250ppm U₃O₈ lower cut-off — against the 100ppm cut-off applied at Honeymoon.

Honeymoon learnings applied

Permeability filter, high-grade domaining and tighter classification — together screen out material unlikely to be recovered by ISR.

Amenable to wide-spacing

Deposit characteristics appear to be similar to Honeymoon and would be amenable to the wide-spaced wellfield design.

Extension and upgrade potential


Infill and step-out drilling is the pathway to convert unclassified mineralisation and to extend and upgrade the resource.

Larger mineralised system than Honeymoon

¹Refer to Appendix 1 for further details of Mineral Resource classification for Gould's Dam

Jason's Deposit

A major mineralised system

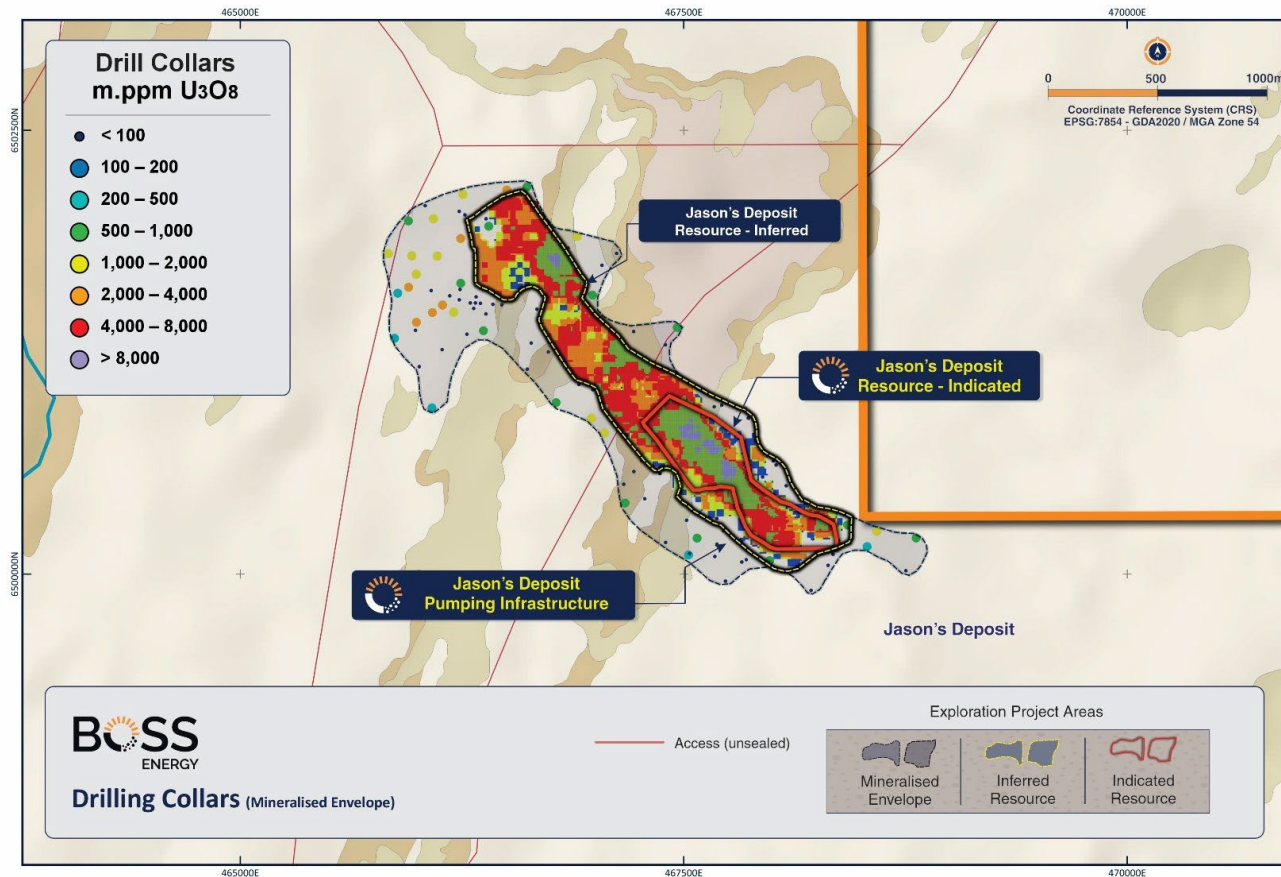

¹Refer to Appendix 1 for further details of Mineral Resource classification for Jason's Deposit

13.3Mt @ 410ppm
Mineral Resource Estimate¹

12.0Mlbs U₃O₈
Uranium Metal¹

Scale and setting

Yarramba Palaeovalley, 13km north of Honeymoon; defined over 3.5km of length and 1.4km of width.

250ppm cut-off

Reported above a 250ppm U₃O₈ cut-off — against 100ppm at Honeymoon. Permeability filter has also been applied.

Amenable to wide-spacing

Deposit characteristics appear to be similar to Honeymoon and would be amenable to the wide- spaced wellfield design.

Mineralisation outside the MRE

A material portion of known mineralisation is unclassified, relying on historic drilling and current drill spacings.


A significant resource proximal to Honeymoon

Work Programs

Advancing Gould's and Jason's Deposit

Delivered • Accelerated Work Program

Next • Permitting Catalysts

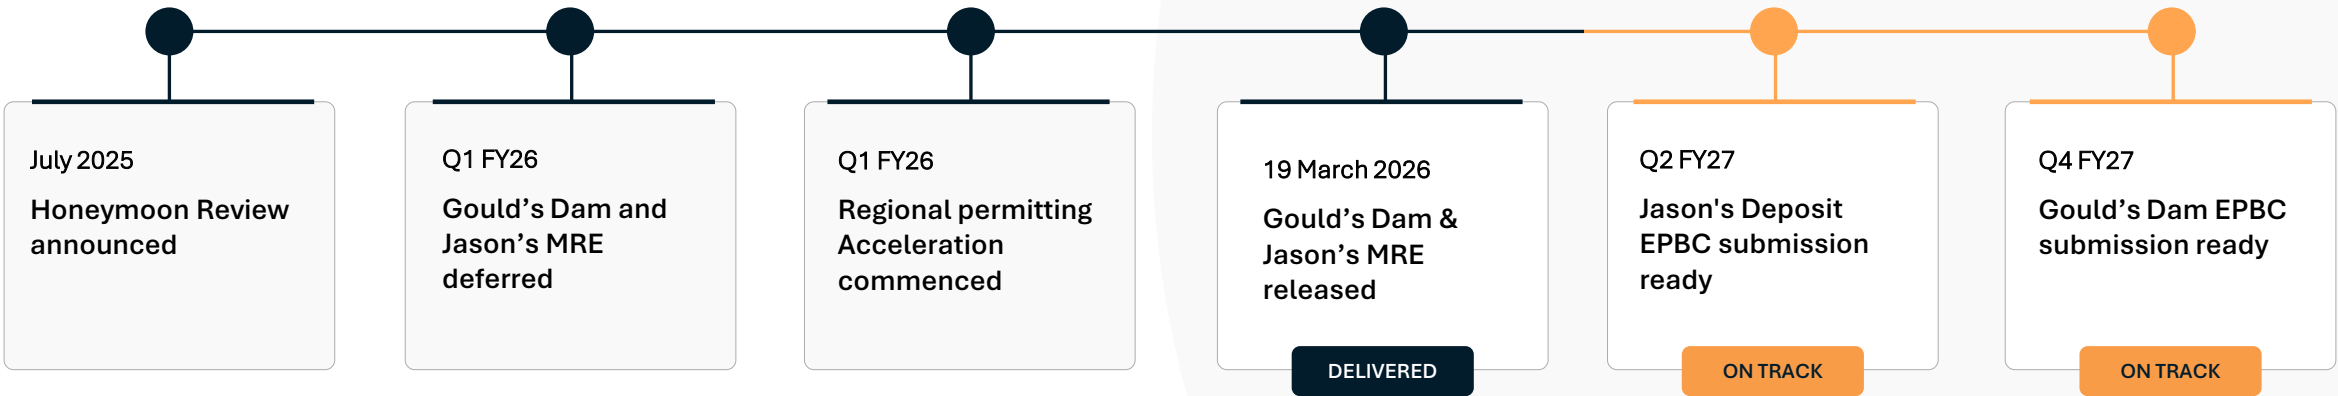

Honeymoon learnings have strengthened the resource update and accelerated the permitting pathway across Boss's regional assets.

Acceleration of Gould's Dam and Jason's Deposit in parallel to Honeymoon New Feasibility Study

Hub-and-spoke strategy


One plant, three deposits

Gould's Dam – loaded resin

33.1Mlbs resource², resin trucked ~75km — no long-distance pipelines




Loaded Resin
Trucked



Honeymoon Processing Hub



New Trunkline +
Intermediate Storage



Jason's Deposit – new trunkline

12.0Mlbs resource², 13km twin trunkline to Honeymoon



Satellite deposits, one plant — more pounds, minimised new infrastructure

- **Low-capital growth**
Latent back-end capacity lifted with minimal capital
- **Longer mine life**
Gould's Dam and Jason's Deposit extend beyond the NFS
- **Staged capital**
Spend phases in as each deposit starts
- **Resilient supply**
Feed from three orebodies, not one
- **Operating synergies**
Fixed costs spread over more pounds — ~A\$12/lb lower by the early 2030s
- **Higher sustained output**
Hub aspiration of 2.5Mlbs a year at A\$65/lb AISC by the early 2030s

1 processing hub

Honeymoon plant, utilities and workforce already in place

3 deposits

Honeymoon, Gould's Dam and Jason's Deposit feeding a single plant


65.9Mlbs

Combined mineral resource across the three deposits²

1. Refer to the "Aspirational Statements" section in the "Disclaimer and Important Notices" section of this presentation.
2. Refer to Appendix 1 for further details of Mineral Resource classification for Gould's Dam, Jason's Deposit and Honeymoon.

Honeymoon Processing Hub - Aspiration

Production and costs could be meaningfully improved

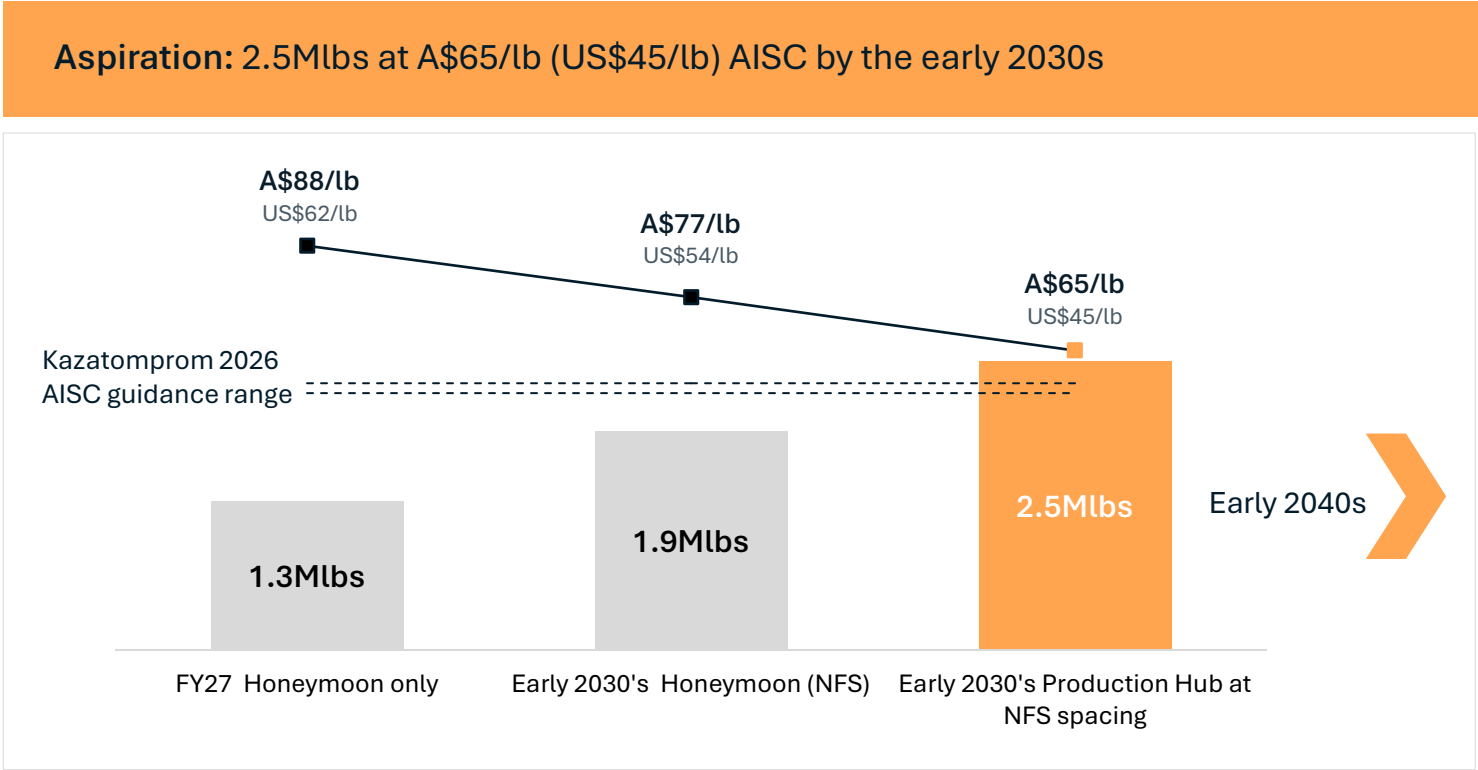

2.5Mlbs p.a.

Aspirational production hub rate by the early 2030s, utilising back-end capacity already installed at Honeymoon

A\$65/lb (US\$45/lb)

Aspirational AISC at hub scale by the early 2030s, assuming cost structure consistent with the NFS

~A\$12/lb lower

Aspirational unit cost reduction by the early 2030s from filling latent plant capacity and fractionalising fixed costs

1. Refer to the "Aspirational Statements" section in the "Disclaimer and Important Notices" section of this presentation.

Leveraging the Honeymoon plant

Jason's Deposit – proposed processing method


01

Proven on site today
East Kalkaroo trunkline and HV extension, operating now



02

Central facility layout
Jason's Deposit site plan under consideration in the options study

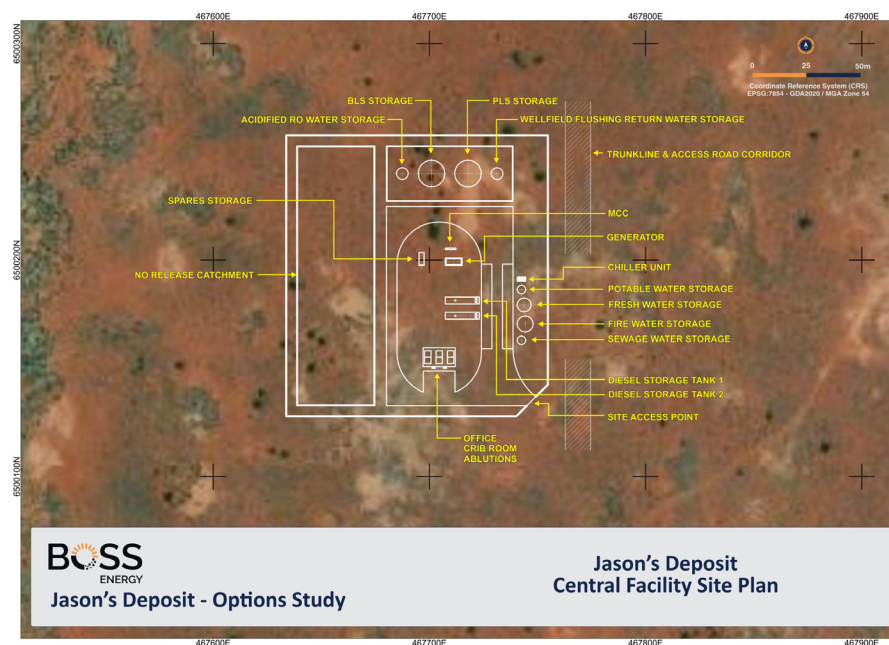

03

How Jason's Deposit is processed
Wellfield at Jason's Deposit uranium recovery at Honeymoon

13km twin trunkline

HDPE lines carry barren leach solution out and pregnant leach solution back to Honeymoon

Production aspiration by the early 2030s¹

HDPE lines carry barren leach solution out and pregnant leach solution back to Honeymoon

Minimal footprint at Jason's Deposit

Storage tanks, transfer pumps and power distribution only — flow into the Honeymoon plant

Wellfield at Jason's Deposit, **uranium processing at Honeymoon**

1. Refer to the "Aspirational Statements" section in the "Disclaimer and Important Notices" section of this presentation.

Transporting uranium, not water

Gould's Dam – proposed processing method


01

Proven satellite model – used globally
Illustrative example below of enCore Energy's Upper Spring Creek resin loading facility, South Texas



02

Central facility layout
Gould's Dam site plan under consideration in the options study

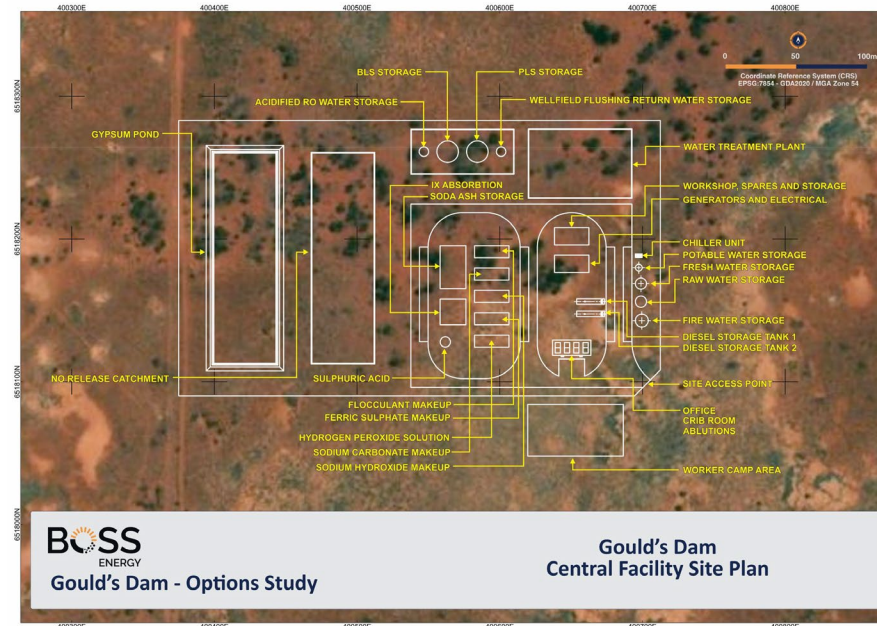

03

How Gould's Dam is processed
Resin loaded on site, elution, precipitation, calcination and drying at Honeymoon

~75km to Honeymoon

Loaded resin trucked to the existing plant — likely to be more economic than a trunkline at that distance

Production aspiration by the early 2030s¹

Initial rate based on current understanding of resource and satellite facility size being carried in options study

Options study underway

Estimates underway for resin and eluate trucking, advancing to PFS

Resin loaded at Gould's Dam, **processing at Honeymoon**

1. Refer to the "Aspirational Statements" section in the "Disclaimer and Important Notices" section of this presentation.

Permitting progress

Baseline studies nearing completion for permitting submissions

Substantial baseline environmental and initial technical work delivered across both deposits

Workstream	Jason's Deposit	Gould's Dam
Groundwater	Baseline and geological data collection completed	Baseline collection and pumping tests completed
Environment	Baseline ecology and soil/sediment studies completed; surface water and flood assessments undertaken, air quality monitoring installed	Baseline Ecology studies completed; radon monitoring installed; soil / sediment sampling advanced
Engineering	Preliminary trunkline and infrastructure design completed; initial wellfield layouts	Preliminary engineering for trunkline and satellite options; initial wellfield layouts
Metallurgy	Sonic core drilling completed; initial ANSTO test work completed	Sonic core drilling completed; initial ANSTO test work completed


Significant work completed with decision last year to accelerate Gould's Dam and Jason's Deposit

Next milestones:

Complete remaining surveys, modelling and impact assessments; finalise development scope and consultation to support EPBC referrals and Mining Lease applications.

Development Pathway

Indicative development timeline – Jason's Deposit and Gould's Dam

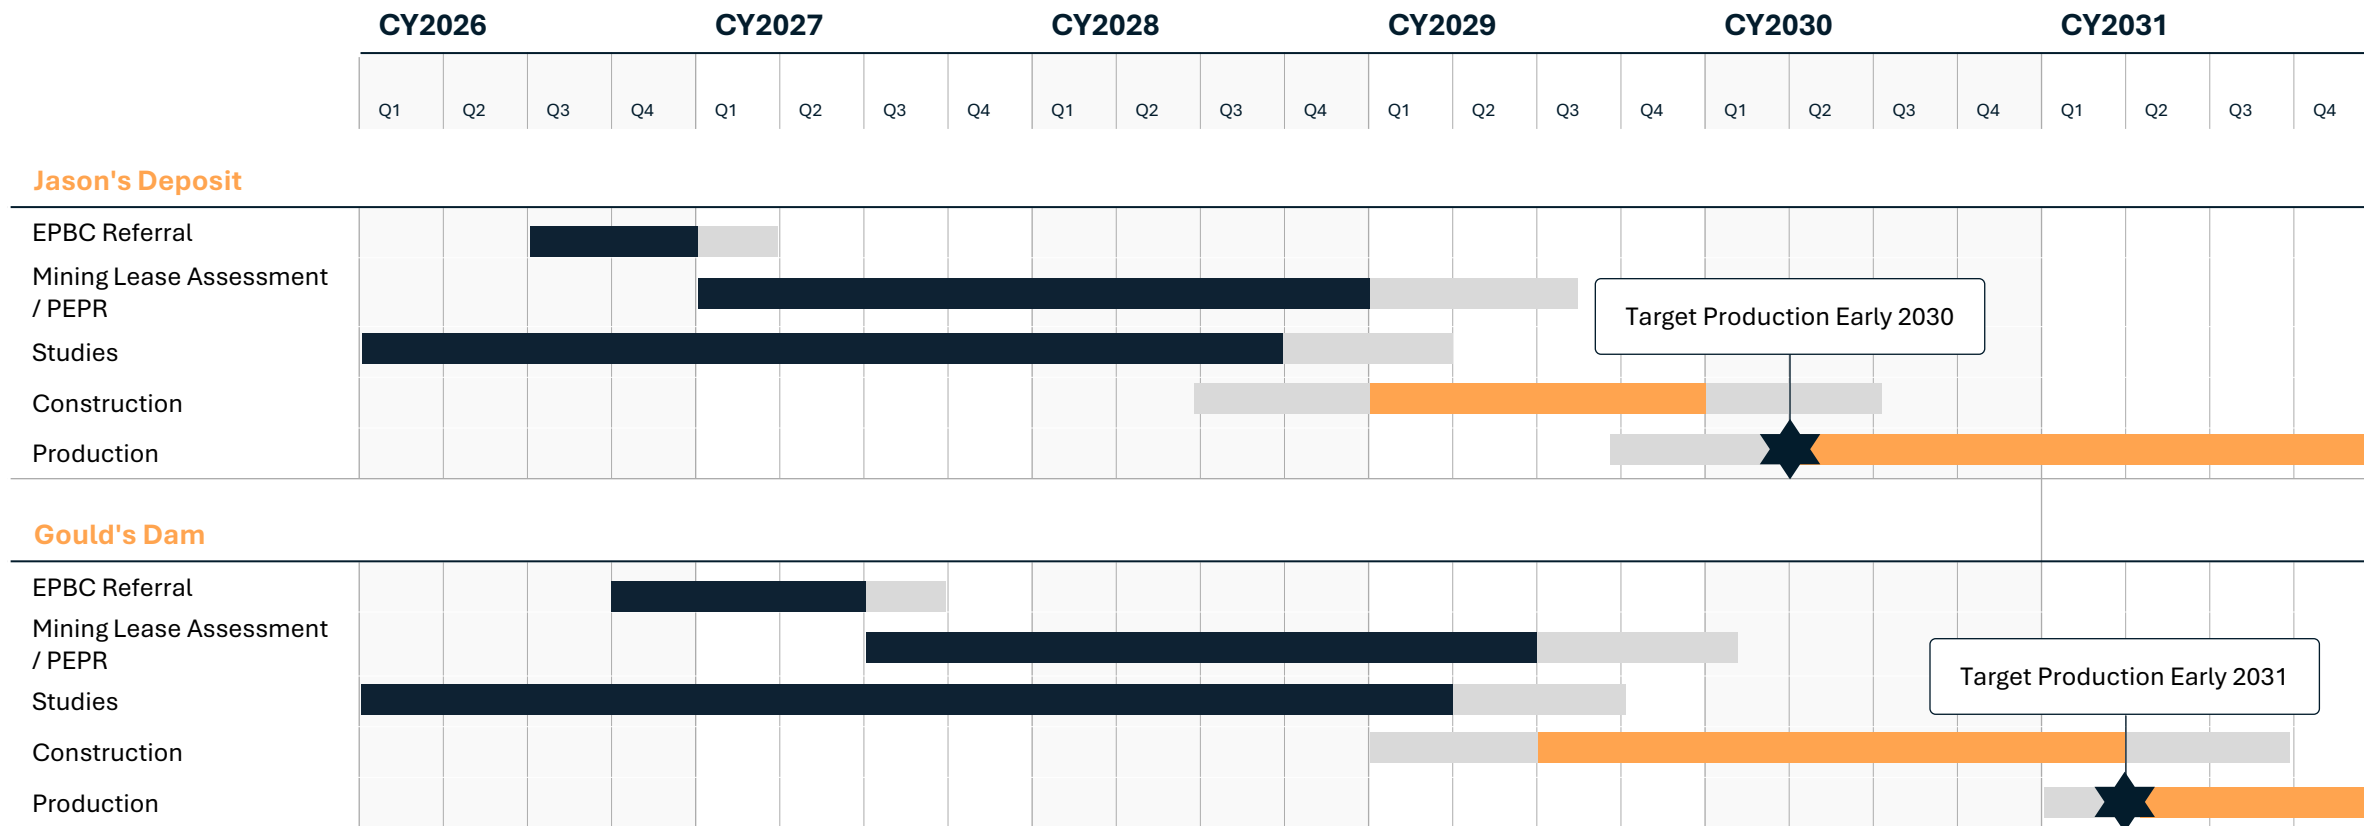

Draft schedule, subject to approvals, wellfield performance and board decisions. Assumes no field leach trials are required.

Exploration – providing strategic growth in the Honeymoon Catchment

Honeymoon Catchment - Growth



- Extend known systems

- Increase resource confidence

- Generate new opportunities

01

Resource extension

Grow the resource base

Targeted drilling at Gould's Dam and Jason's Deposit to extend known mineralisation beyond current resource boundaries and define the full scale of each mineralised system.

02

Resource delineation

Increase confidence

Focused drilling to lift geological confidence in Inferred Resources, support conversion to higher-confidence categories and inform future development studies.

03


Regional discovery pipeline

Create future options

Systematic exploration across Boss' broader tenement position to identify new ISR-amenable deposits and establish the next generation of development opportunities.

FY27 delineation drilling program

Exploration – Gould’s Dam Deposit

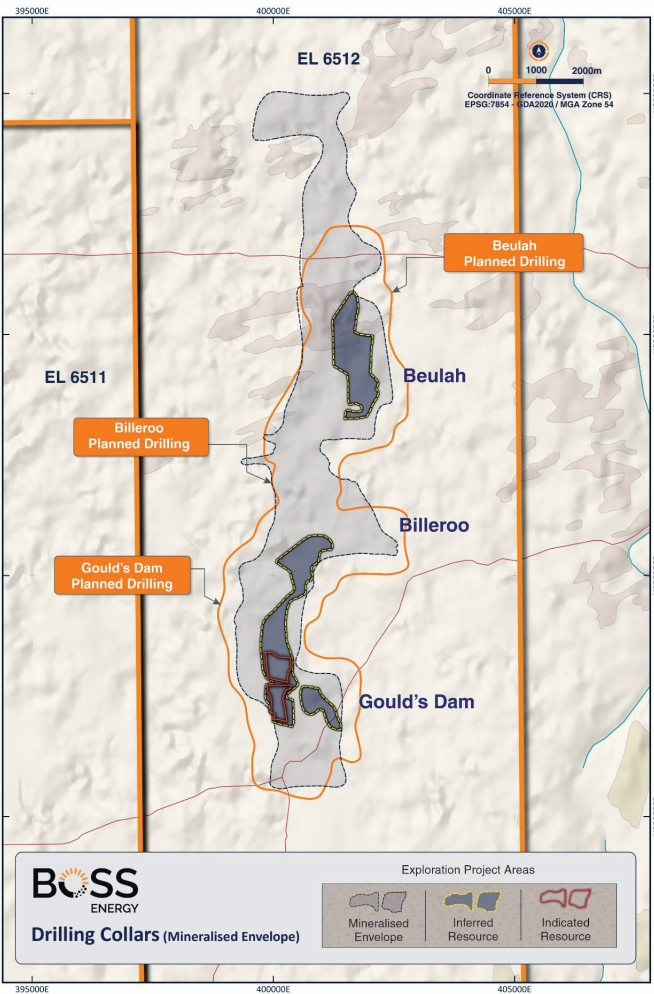

Purpose: Upgrade prospective mineralisation to Inferred Resource Classification; core for density and mineralogy

Planned drilling	
Mud rotary	up to 507 holes / ~67,431m
Diamond core	up to 30 holes / ~3,960m

Drilling by classification




Indicative Timing (FY27)



Up to 537 holes planned	~71,391m total metres	85% Resource extension
-----------------------------------	---------------------------------	----------------------------------

FY27 delineation drilling program


Exploration – Jason's Deposit

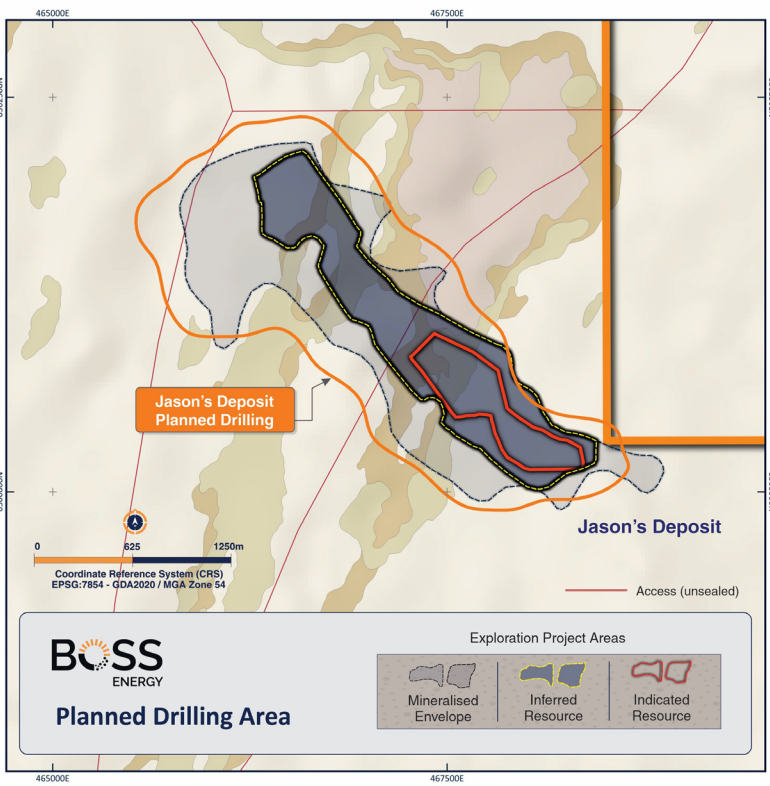


Purpose: Upgrade prospective mineralisation to Inferred Resource Classification; core for density and mineralogy.

Planned drilling	
Mud rotary	up to 100 holes / ~12,600m
Diamond core	up to 15 holes / ~1,890m

Drilling by classification

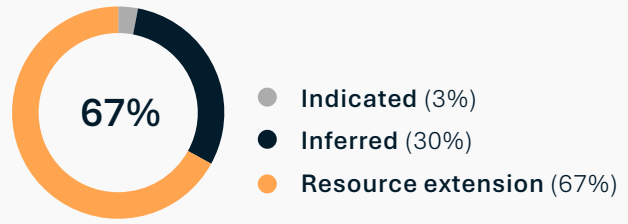

Indicative Timing (FY27)



Up to 115
holes planned


~14,490m
total metres

67%
Resource extension


FY27 – Systematic testing of the Honeymoon Hub catchment beyond Gould's Dam and Jason's Deposit

Building Boss's next discovery pipeline

Gould's Dam Area

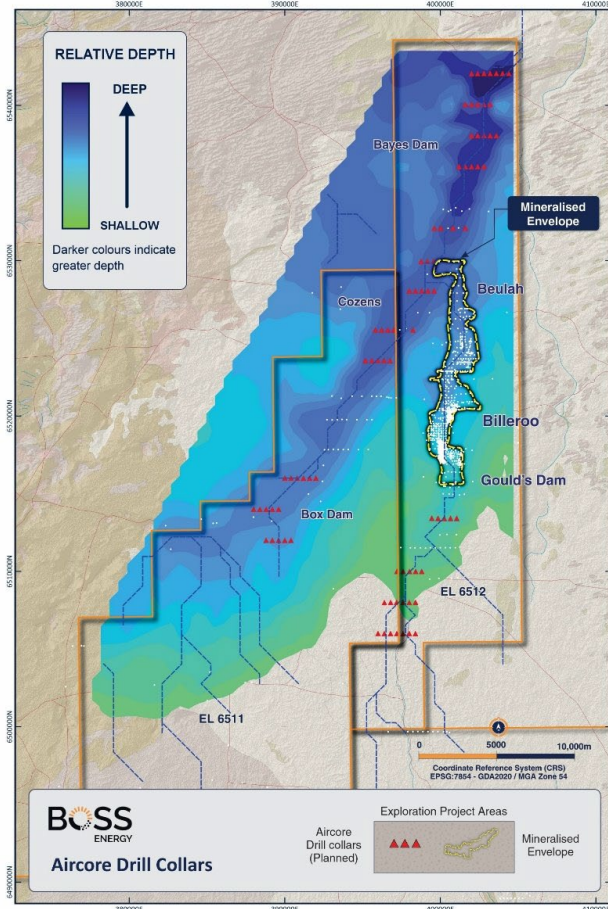

Honeymoon / Jason's Deposit Area

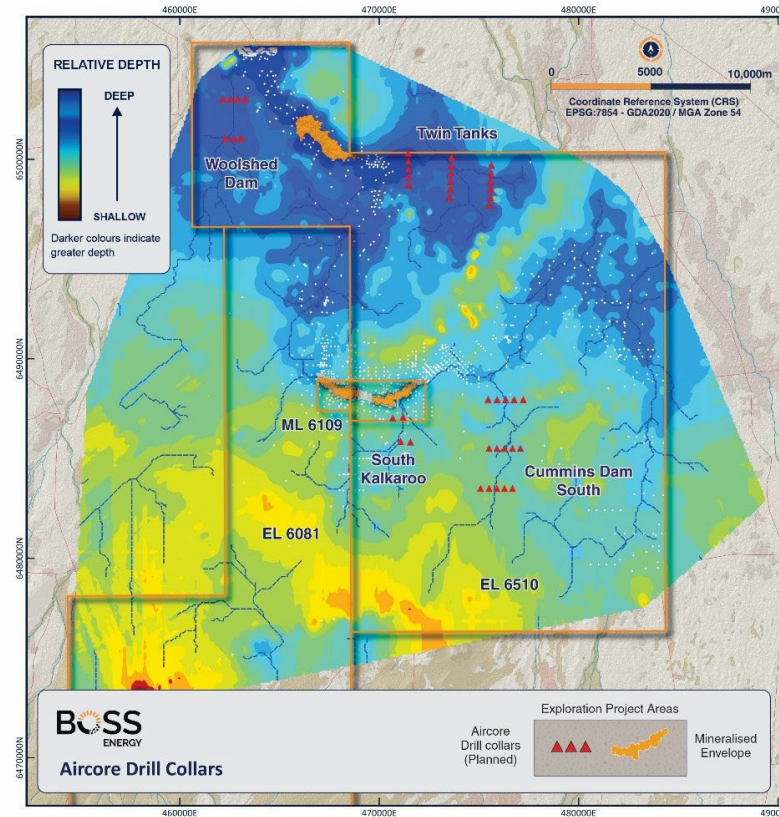

FY27 Regional Aircore Program

A deliberate search for the next generation of ISR opportunities

16,440m
planned drilling

159
aircore holes


9
priority targets

- Passive seismic interpretation has identified priority palaeovalleys across the Honeymoon catchment including proximal to the Honeymoon, Jason's Deposit and Gould's Dam deposits
- Systematic aircore drilling is planned for FY27 to test valley architecture and uranium mineralisation

Alta Mesa

Alta Mesa Joint Venture

Alta Mesa JV (30%)

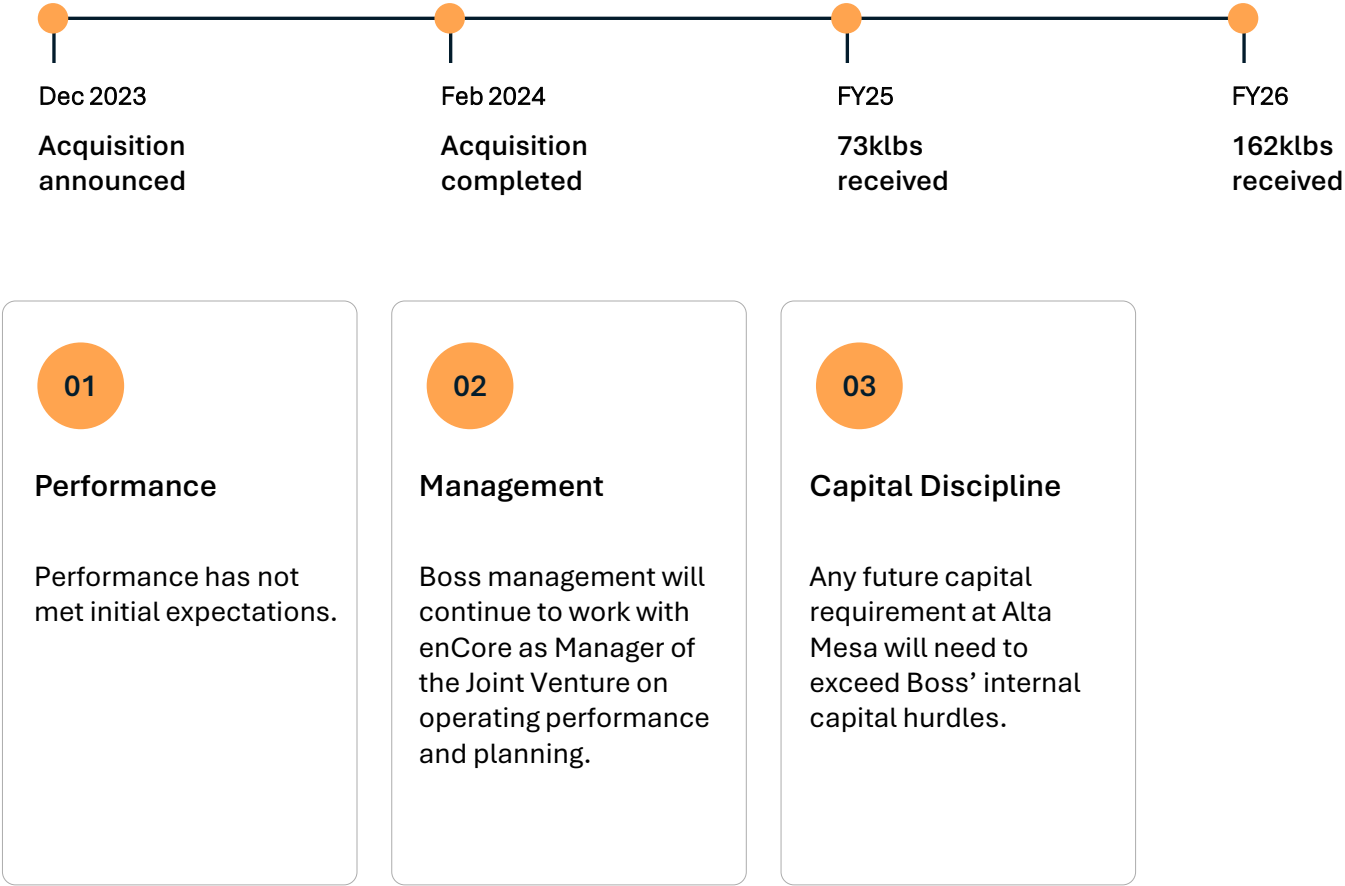

Closing

Boss Energy

A stronger foundation.
A clear direction.



Deliver and optimise Honeymoon:

Safe, reliable production,
improved margins and
disciplined execution of the
NFS plan



Build the regional production hub:

Advance Jason's Deposit and
Gould's Dam to support our
aspiration for higher
production, lower costs and a
longer mine life



Grow long-term shareholder value:

Apply our people, technical
capability and commercial
discipline across the
business

Our focus is to turn this stronger
foundation into operational performance,
growth and shareholder value

Q&A





Contact Information

+61 (8) 6263 4494

boss@bossenergy.com

ASX: BOE
OTCQX: BQSSF

BOSS
ENERGY

Appendices

Appendix 1 - Gould's Dam and Jason's Deposit Mineral Resource (March 2026)

Table 1: Gould's Dam Mineral Resource (reported 19 March 2026)

Resource Classification	Grade		Metal	
	Mt	ppm U ₃ O ₈	Kt U ₃ O ₈	Mlbs U ₃ O ₈
Indicated	7.5	465	3.5	7.7
Inferred	31.2	369	11.5	25.4
TOTAL	38.7	388	15.0	33.1

Notes:

- Effective 31 December 2025
- The model is reported unconstrained and above a 250ppm U₃O₈ lower cut-off grade and 100mD Ksdr permeability (unit millidarcy; mD) lower cutoff for all mineralisation subdomains in consideration of potential for recovery by ISR processing.
- The U₃O₈ lower cut-off grade reflects the assumed lower detection limit of the PFN tool. A Ksdr permeability is assumed to be moderate permeable equivalent to a well-sorted sand/gravels which would be amenable for ISR mining.
- There is no historic depletion by production.
- Estimation of the combined PFN data and disequilibrium factored gamma data with high-grade cuts is by ordinary kriging using dynamic anisotropy for the mineralised zones.
- The definition of the mineralised zones is refined by conditional indicator kriging (CIK) estimate based on a 250ppm U₃O₈ indicator and a resultant estimated 17% probability of being above the indicator cut-off grade. The subdomains are used as hard boundaries.
- Density is for the Eyre Formation based on analyses of sonic core as 1.9 t/m³, which is consistent with semi-consolidated quartz sandstone.
- The model assumes agglomeration of 10mE x 10mN x 1mRL parent blocks for definition of well fields for production in the Gould's Dam area. The surrounding areas that are still at an early stage of resource definition with less available data were modelled on larger 40mE x 40mN x 1mRL panels.
- The model does not account for dilution, ore loss, hydrogeology, or recovery issues. Continuity of high-grade U₃O₈ is expected to be locally erratic throughout the palaeovalley. These parameters should be considered during the mining study as being dependent on the ISR treatment process.
- Classification is according to JORC Code Mineral Resource categories.
- Estimated disequilibrium factors applied to the gamma data cannot fully mitigate the risk of assumptions about the tenor of uranium mineralisation based on that gamma data. The gamma data does not directly measure uranium.
- A Mineral Resource requires technical and economic evaluation and consideration of modifying factors for conversion to an Ore Reserve. It is possible that not all Mineral Resource will convert to an Ore Reserve.
- Totals may vary due to rounded figures.

Table 2: Jason's Deposit Mineral Resource (reported 19 March 2026)

Resource Classification	Mt	Grade ppm U ₃ O ₈	Metal	
			Kt U ₃ O ₈	Mlbs U ₃ O ₈
Indicated	4.8	464	2.2	4.9
Inferred	8.5	380	3.2	7.1
TOTAL	13.3	410	5.4	12.0

Notes:

- Effective 31 December 2025
- The model is reported unconstrained and above a 250ppm U₃O₈ lower cut-off grade and 100mD Ksdr permeability (unit millidarcy; mD) lower cutoff for all mineralisation subdomains in consideration of potential for recovery by ISR processing.
- The U₃O₈ lower cut-off grade reflects the assumed lower detection limit of the PFN tool.
- A Ksdr permeability is assumed to be moderate permeable equivalent to a well-sorted sand/gravels which would be amenable for ISR mining.
- There is no historic depletion by production.
- Estimation of the combined PFN data and disequilibrium factored gamma data with high-grade cuts is by ordinary kriging using dynamic anisotropy for the mineralised zones.
- The definition of the mineralised zones is refined by conditional indicator kriging (CIK) estimate based on a 250ppm U₃O₈ indicator and a resultant estimated 17% probability of being above the indicator cut-off grade. The subdomains are used as hard boundaries.
- Density is for the Eyre Formation based on analyses of sonic core as 1.9 t/m³, which is consistent with semi-consolidated quartz sandstone.
- The Jason's Deposit model assumes agglomeration of 40mE x 40mN x 1mRL parent blocks for early-stage resource definition with wide spaced fences, closer spaced drilling along the fences and good proportion of recent, quality data. The model is held on 10mE x 10mN x 1m sub blocks to accommodate a lithological model generated by Boss.
- The model does not account for dilution, ore loss, hydrogeology, or recovery issues. Continuity of high-grade U₃O₈ is expected to be locally erratic throughout the palaeovalley. These parameters should be considered during the mining study as being dependent on the ISR treatment process.
- Classification is according to JORC Code Mineral Resource categories.
- Estimated disequilibrium factors applied to the gamma data cannot fully mitigate the risk of assumptions about the tenor of uranium mineralisation based on that gamma data. The gamma data does not directly measure uranium.
- A Mineral Resource requires technical and economic evaluation and consideration of modifying factors for conversion to an Ore Reserve. It is possible that not all Mineral Resource will convert to an Ore Reserve.
- Totals may vary due to rounded figures.

Appendix 1 - Honeymoon Mineral Resource

Table 3: Honeymoon Mineral Resource (reported 27 August 2026)

Resource Classification	Grade		Metal	
	Mt	ppm U ₃ O ₈	Kt U ₃ O ₈	Mlbs U ₃ O ₈
Indicated	12.1	510	6.2	13.7
Inferred	9.3	350	3.2	7.1
TOTAL	21.4	440	9.4	20.8

Honeymoon Project Mineral Resource Estimate — effective date 30 June 2026, reported net of ISR depletion of 3.3 Mlbs U₃O₈ to 30 June 2026.

Notes:

- The Mineral Resource estimate is classified in accordance with the JORC Code (2012).
- The Mineral Resource database has a cut-off date of 31 December 2025.
- The effective date of the Mineral Resource estimate is 30 June 2026.
- The Mineral Resource estimate is reported at an in-situ cut-off of 100 ppm U₃O₈. A grade-thickness (GT) cut-off of GT≥400 m.ppm U₃O₈ was applied selectively in border areas of the MRE.
- Only the recoverable portion of blocks ≥100 ppm U₃O₈ is reported.
- The Mineral Resource is constrained to an ISR-amenable permeability threshold of K_{SDR}≥100 mD.
- The Mineral Resource is mainly based on equivalent U₃O₈ (eU₃O₈), without adjusting for localised radiometric disequilibrium effects.
- The Mineral Resource estimate is reported net of depletion from the Honeymoon in-situ recovery (ISR) extraction of 3.3 Mlbs U₃O₈ (1.5 Kt U₃O₈) as of 30 June 2026 by subtraction of extracted metal tonnes from Indicated Resource metal tonnes.
- The Mineral Resource estimate is reported on an in-situ tonnes basis.
- The Mineral Resource estimate is rounded to reflect the level of confidence in the estimate at the time of reporting.
- Totals may vary due to rounding.
- The Mineral Resource estimate is reported both within the Honeymoon ML6109 licence and outside in EL6081 licence.