

VICTORY BORE VANADIUM PROJECT UPDATE

Pre-feasibility on track; Vanadium extraction and HPA assessment advancing

Surefire Resources NL (“**Surefire**” or “the **Company**”) is pleased to advise an update on its 100% owned flagship Victory Bore Vanadium project, located 400km from Geraldton Port in Western Australia (see Figure 1).

Surefire is progressing the Victory Bore project at a key time when global markets have an increasing demand for vanadium in both traditional steel and emerging Vanadium Redox batteries. The company is currently undertaking completion of highly detailed work as part of a Pre-Feasibility Study (**PFS**) economic assessment, together with value adding initiatives in novel vanadium extraction and High Purity Alumina extraction potential.

Pre-Feasibility Study (PFS)

Surefire has engaged METS Engineering to complete the PFS following a review of metallurgical information and their previous involvement in the project area. METS were also selected on the basis that they have an unrivalled depth of metallurgical experience in assessment of Western Australian Vanadium deposits and completion of PFS and Feasibility studies.

Progress to date:

The PFS is progressing on track for completion by November 2023 and currently there are no issues. The tasks completed or underway are listed below.

AREA	STATUS
Metallurgical testwork review	Completed. No deleterious elements or issues
Beneficiation review	Completed. Magnetite Ore grade is good
Geology and Resources	Completed
Process Design	Completed
Process Flow Diagrams	Completed
Ownership and Legal	Completed
Environmental report	Completed
Statutory approvals and permits	Completed: Mining Licence Application submitted
Mining	In progress
Market study	In progress
Mechanical Equipment List / Electrical Load List	In progress
Plant Infrastructure	In progress
Transport and Logistics	In progress.
Human Resources OH&S	In progress
CAPEX Estimate (±25%)	In progress and being updated
OPEX Estimate (±25%)	In progress and being updated
Economic Evaluation	Awaiting above information
Project Execution	In progress and being updated
Risk Assessment	In progress and being updated

Other work the company is completing to add value to the project is as follows:

Vanadium Extraction Progress:

This work is being conducted in parallel with the PFS. The aim is to achieve extraction of vanadium directly. Preliminary test plan developed and testing underway. If successful it will be incorporated into the PFS.

High Purity Alumina (HPA) progress:

This work is being conducted in parallel with the PFS. It comprises a separate study on the potential for production of High Purity Alumina (HPA) from the waste and host rock at the Victory Bore Vanadium project. The work is being undertaken by Lava Blue Ltd (see ASX release 20 March 2023). Initial testwork including leaching and concentration of liquor completed. Approaches to optimising aluminium recovery in leachate are being investigated.

Aluminium chloride hexahydrate (ACH) has been produced from the leachate. Following recrystallization ACH was analysed as being 99.8% pure and contaminants were identified. Lava Blue is now assessing contaminant control strategies and plans to produce 4N HPA samples following the next phase of test work.

Process Plant Options

The company is assessing potential options for processing of Victory Bore concentrate in offshore locations to provide operating and market advantages. The company has engaged with several offshore proponents and will provide an update when agreements are reached.

Offtake and Offshore Discussions

The company has commenced discussions with interested parties and will provide an update when any agreements are reached.

Victory Bore Resource

The resources and exploration target of the Victory Bore project form a robust mineral resource of world class status, setting it apart from other potential vanadium resources in Australia (refer ASX announcement 7 March 2023 and Table 1 below):

Victory Bore Measured:	16.8 Mt @ 0.42% V ₂ O ₅
Victory Bore Indicated:	70.3 Mt @ 0.40% V ₂ O ₅
Victory Bore Inferred:	147.7 Mt @ 0.38% V ₂ O ₅
Total	234.8 Mt @ 0.39% V₂O₅
Unaly Hill Inferred:	86.2 Mt @ 0.42% V ₂ O ₅
Project Total: ²	321.0 Mt @ 0.39% V₂O₅

When the existing Mineral Resource Estimate (MRE) is added to the Exploration Target Estimate (ETE), the potential of the **Victory Bore Project** is the range of **1,003Mt to 1,511Mt @ 0.2% to 0.43% V₂O₅**.

Lower Limit ETE	682 Mt @ 0.20% V ₂ O ₅	Upper Limit ETE	1,190 Mt @ 0.43% V ₂ O ₅
Project	321 Mt @ 0.39% V ₂ O ₅	Project	321 Mt @ 0.39% V ₂ O ₅
Total	1,003 Mt @ 0.20% to 0.39% V₂O₅	to	1,511 Mt @ 0.39% to 0.43% V₂O₅

¹ The potential quantity and grade of the Exploration target is conceptual in nature. There has been insufficient exploration to estimate a Mineral Resource over the entire area of the Exploration Target, and it is uncertain if further exploration will result in the estimation of an increased Mineral Resource.

² The total numbers may include rounding. The Victory Bore resource is based on a 0.26% V₂O₅ cut-off grade. Resource estimation by external consultants HGMC using ordinary kriging.

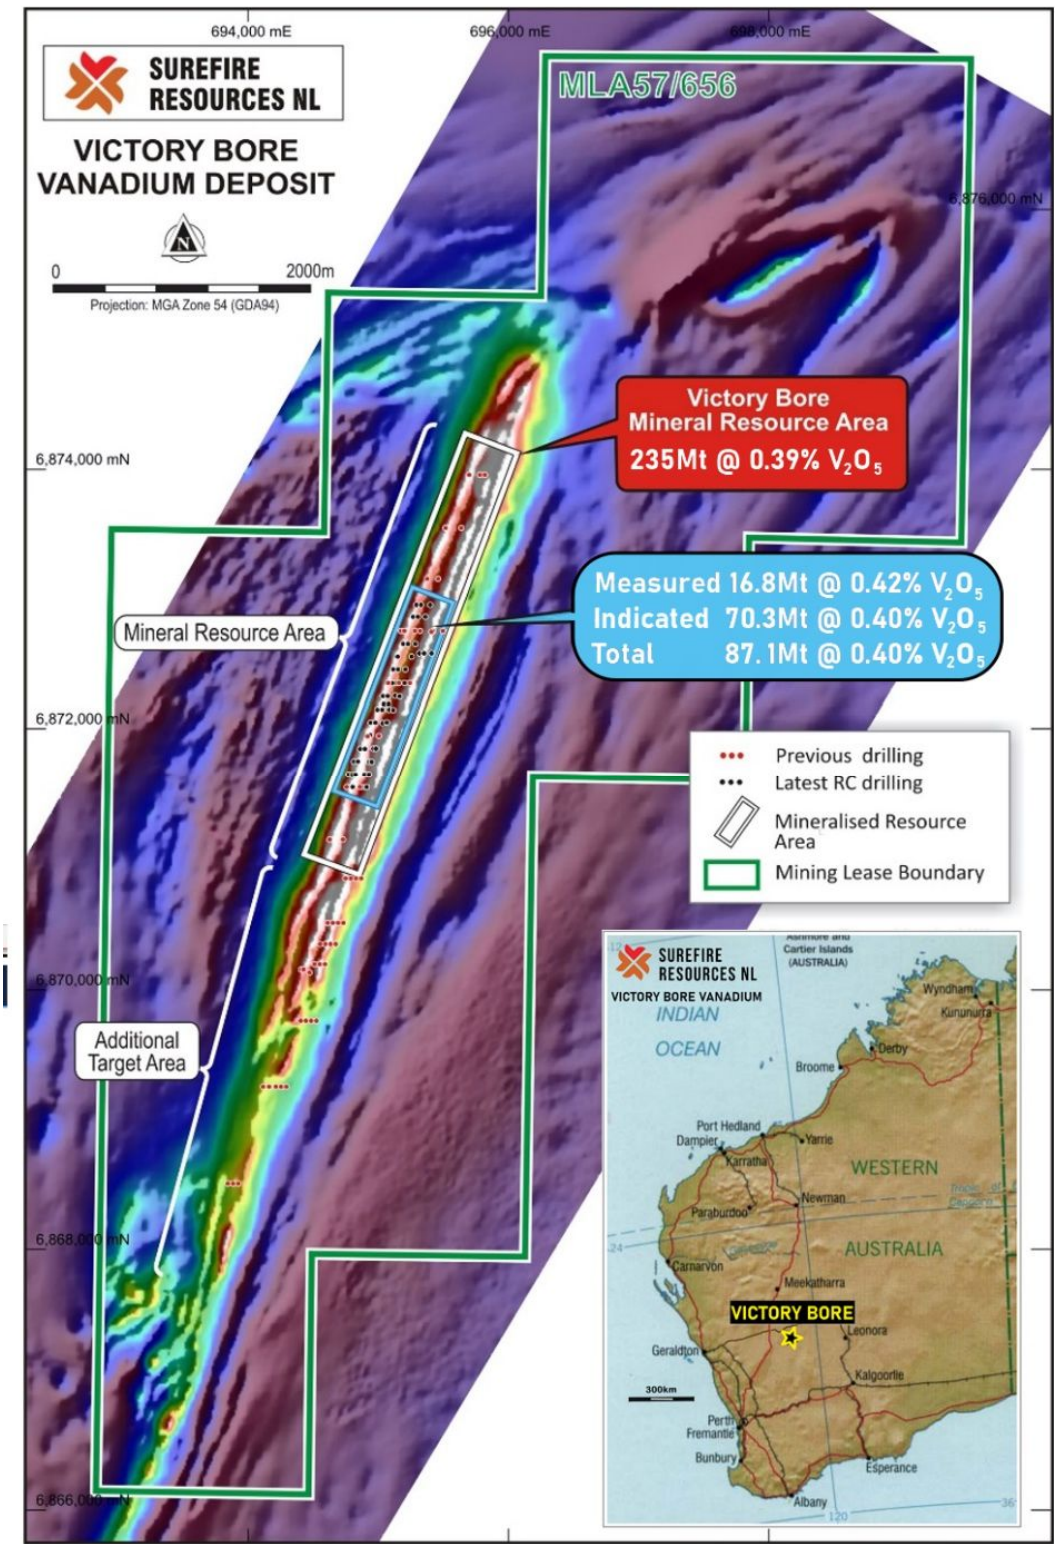


Figure 1 100% Surefire Victory Bore Vanadium Project resources over TMI base map & project location.

The Company expects completion of all works involved in the PFS and other studies by November 2023 subject to any delays outside of the Company's control and is making preliminary plans for completions of further drilling to enable the Measured resources to be converted into a JORC Reserve, providing an economic foundation for advancing the project.

The Company looks forward to providing further updates as the work progresses on all fronts.

Authorised for ASX release by Paul Burton Managing Director +61 8 6331 6330

About Surefire Resources:

Surefire Resources is an Australian mineral exploration company based in Perth, Western Australia (WA). The company holds mineral exploration licences over Vanadium, Magnetite and Gold projects located in WA. Its focus is on adding value to shareholders by advancing its Victory Bore vanadium critical and battery minerals project, a 321Mt JORC resource located close to existing infrastructure and currently in Pre-Feasibility stage. In addition, its large magnetite project with up to 1Btonnes of high grade Iron and its Gold project have potential to add considerable value to the company.

Forward Looking Statements:

This announcement contains 'forward-looking information' that is based on the Company's expectations, estimates and projections as of the date on which the statements were made. This forward-looking information includes, among other things, statements with respect to the Company's business strategy, plans, development, objectives, performance, outlook, growth, cash flow, projections, targets and expectations, mineral reserves and resources, results of exploration and related expenses. Generally, this forward-looking information can be identified by the use of forward-looking terminology such as 'outlook', 'anticipate', 'project', 'target', 'potential', 'likely', 'believe', 'estimate', 'expect', 'intend', 'may', 'would', 'could', 'should', 'scheduled', 'will', 'plan', 'forecast', 'evolve' and similar expressions. Persons reading this announcement are cautioned that such statements are only predictions, and that the Company's actual future results or performance may be materially different. Forward-looking information is subject to known and unknown risks, uncertainties and other factors that may cause the Company's actual results, level of activity, performance or achievements to be materially different from those expressed or implied by such forward-looking information.

Competent Persons Statements:

The information in this report that relates to exploration results has been reviewed, compiled and fairly represented by Mr Horst Prumm, a Member of the Australian Institute of Mining and Metallurgy ('AusIMM') and the Australian Institute of Geoscience ('AIG') and a fulltime employee of Prumm Corporation Pty Ltd. Mr Prumm has sufficient experience relevant to the style of mineralisation and type of deposits under consideration to qualify as a Competent Person as defined in the 2012 Edition of the Joint Ore Reserves Committee ('JORC') Australasian Code for Reporting of Exploration Results, Minerals Resources and Ore Reserves. Mr Prumm consents to the inclusion in this report of the matters based on this information in the form and context in which it appears.

The information in this report that relates to the Victory Bore Vanadium mineral resource estimation is based on work completed by Mr. Stephen Hyland, a Competent Person and Fellow of the AusIMM. Mr. Hyland is Principal Consultant Geologist with Hyland Geological and Mining Consultants (HGMC), who is a Fellow of the Australian Institute of Mining and Metallurgy and holds relevant qualifications and experience as a qualified person for public reporting according to the JORC Code in Australia. Mr Hyland is also a Qualified Person under the rules and requirements of the Canadian Reporting Instrument NI43-101. Mr Hyland consents to the inclusion in this report of the information in the form and context in which it appears.

JORC Code, 2012 Edition:
Section 1: Sampling Techniques and Data
(Criteria in this section apply to all succeeding sections.)

Criteria	Commentary
Sampling Techniques	Reverse Circulation ("RC") drilling was carried out with an RCD250 drilling rig with a Deck mounted Sullair 1150/350 compressor coupled to a Sullair 1350/500 Auxiliary compressor and 2400cfm/950psi Air Research booster. Rig mounted sampling system with twin sample collection chambers and a Sandvik cone splitter. 4 ½ inch drill pipe with 5 inch face sampling hammer. The holes were drilled to 140mm diameter. Standard rig mounted sampling system was employed. Samples were taken from the collar (0m). Sampling was continuous to the end of hole depth. Each metre was geologically logged and assayed by hand-held XRF, assayed for mag sus. and recorded. Each metre was chip trayed and kept in storage. Drill collar positions were captured using a DGPS to 10mm accuracy. Each metre of samples was split with a three-tier riffle splitter mounted beneath the cyclone on the drill rig. Metre samples were collected in green mining bags and calico bags. Each metre was also sieved and collected in a chip tray for geological logging. Samples were composited to 2m manually using a 50% riffle splitter. The 2m composite samples were delivered to Nagrom Laboratories in Kelmscott by Surefire staff for assay of vanadium and multi-element assay.
Drilling techniques	62 X 140mm RC holes were drilled for a total of 5,189 metres. The Reverse circulation rig used a downhole hammer and face sampling button bit. Sample piles were recorded for each 6m rod. Rods were counted when pulled at the end of each hole. Given the relatively short hole length, no down hole surveying instruments were used.
Drill sample recovery	Geologist supervising the drilling program recorded each metre as it was drilled. Geological logs, samples logs, daily drill logs, and sample piles all recorded hole depths. No aberrations were found. All logs of sampling and drilling lengths matched. Each metre was recovered. No redrilling was necessary. No biases were recorded.
Logging	Drill cuttings were geologically logged to the level of detail deemed appropriate for mineral exploration, with details entered into a geological database. Drilling logs record weathering, oxidation, mineralogy, colour, texture, structure accessory minerals sulphides and mineralisation. All logging is quantitative. The drill holes reported were logged in full.
Sub-sampling techniques and sample preparation	No core drilling carried out. Three tier riffle splitters were used to take one metre samples. Samples were combined to form 2m composites using a 50% riffle splitter. All samples were transported to the Nagrom sample preparation/assay laboratory Kelmscott. The sample preparation followed industry best practise. All samples pulverised to 75um passing 85%. The external laboratory's QA/QC procedures involved the use of appropriate standards, duplicates and blanks which are inserted into sample batches at a frequency deemed appropriate for the exploration results. Sample size was approximately 2kg – 3kg in weight. Field duplicates, standards and blanks were inserted at a random rate of approximately 1 per 20 samples. Given the nature of this resource, the sample sizes are deemed appropriate.

Quality of assay data and laboratory tests	The analytical technique utilised the Nagrom KM-2209-064256 method for Al, Al₂O₃ Co CoO Cr Cr₂O₃ Cu CuO Fe Fe₂O₃ Ni NiO P P₂O₅ S SO₃ Si using Method XRF104 for result units as percentages. LOI used the TGA 002 method to percent units. The Laboratory has provided standards and QA/QC additional to that of Surefire. The external laboratory used maintains their own process of QA/QC using standards, and blanks. Review of the external laboratory quality QA/QC reports and Surefire external laboratory quality QA/QC reports has shown no sample preparation issues with acceptable levels of accuracy and precision and no bias in the analytical datasets.
Verification of sampling and assaying	The sampling techniques were reviewed in the field by an external consultant. No twinned holes were drilled. All data is recorded in specifically designed templates. Assay data was received in spreadsheets and downloaded into geological database. The analysis of Vanadium was provided by the laboratory as V and V₂O₅. No other adjustments were made to the data on receipt from the assay laboratory.
Location of Data Points	Initial drill hole collars were located with a Garman GPS. Final collar locations were located using a digital GPS, accuracy +/- 10mm. Drill hole location is reported using the GDA94_MGAz50 grid system. Drill hole collar was located by GPS. Elevation value is in AHD.
Data spacing and distribution	RC holes were drilled at approximately 25m across strike and 100m line spacings. The data spacing is considered sufficient to assume geological and grade continuity. It is expected that this drilling will allow the estimation of Inferred and Measured Mineral Resources. Samples were composited from 2m according to supervising geologist.
Orientation of data in relation to geological structure	The drill hole was angled perpendicular to the strike of the target horizon to achieve unbiased sampling of the target horizon. Drill intersections are not true widths.
Sample security	Chain of custody of samples was managed by the company and the laboratory. Logging and sampling were carried out in the field at the time of drilling.
Audits or reviews	Sample preparation followed industry best practice at the commercial laboratory facility. QA/QC of assay analyses shows there are no issues with sampling, analytical techniques or results.

Section 2: Reporting of Exploration Results

(Criteria in this section apply to all succeeding sections.)

Criteria	Commentary
Mineral tenement and land tenure status	The exploration results in this report relate to Exploration Licence E57/1036. This EL is 100% owned by Surefire Resources NL and is currently a M in application - M57/656. Tenure in the form of Exploration Licences with standard 5-year expiry dates which may be renewed. There are no known impediments to obtaining a licence to operate in this area.
Exploration done by other parties	Previous regional exploration on the project was undertaken by the company and included, geophysical surveys, geochemical surveys, rock sampling and RC drilling. Historical geophysical surveys included an airborne (helicopter) magnetic survey. Geochemical surveys included soil sampling. A detailed assessment of the historic data is in progress. No significant issues with the data have been detected to-date.

Geology	The Project occurs within the Atley Igneous Complex in the East Murchison Mineral field of Western Australia. The Atley Intrusion is an Anorthosite body that is elongate in an NNE/SSW orientation and runs along the axis of the regional scale Youanmi Fault, a regionally dominant geological feature. Further drilling and assaying is required to fully assess the geology and style of mineralisation. Mineralogy and petrology studies completed suggest that host rocks at Unaly Hill are historical magnetite layers within intrusive Anorthosite, gabbro and ultra mafics. The targeted deposit type and style of mineralisation is a Fe-Ti-V magnetite system.
Drill hole Information	Refer to Table 1 of this report where drill hole collar and downhole orientation and depth information is tabulated. No information has been excluded.
Data aggregation methods	Where assays were composited for summary purposes, all assays were weighted by drill interval. No high-grade cuts have been applied to the sample data reported. Where assays were composited for summary purposes, all assays were weighted by drill interval. No metal equivalent values are used
Relationship between mineralisation widths and intercept lengths	The orientation of mineralization relative to the drill hole is depicted in figures. Drill intersections are not true widths. All drill hole results reported are downhole length, true widths are approximately 82.6% of the down hole widths. All drill hole results reported are downhole length, true widths are shown on figure 3 and in the text.
Diagrams	Appropriate diagrams are included in the main body of this report.
Balanced Reporting	Reporting of the drill results is considered balanced.
Other substantive exploration data	No additional meaningful and material exploration data has been excluded from this report.
Further work	Resource estimation and a prefeasibility work is planned for the Project which may require additional RC percussion and/or diamond drilling to be undertaken.

Section 3: Estimation and Reporting of Mineral Resources

(Criteria in this section apply to all succeeding sections.)

Criteria	Commentary
Database integrity	The drill hole database is maintained by Surefire Resources NL The Competent Person has verified the internal referential integrity of the database. In total 136 drill-holes were available to assist with resource model development. Some historic drill holes required verification of location and elevation and adjusted to known and relatively flat topographic surface. No other significant errors or concerns were encountered.
Site visits	A site visit has not yet been undertaken to the specific Victory Bore location by the Competent Person responsible for the resource estimation. The competent person has visited the very near vicinity of Victory Bore in the past and is very familiar with the general terrane. The Competent Person has also relied upon reports from different personnel including Surefire representatives that have visited and worked at the Victory Bore deposit location. The site is at a very early stage of development with limited features currently observable.
Geological interpretation	Some mapping, geomagnetic surveys and subsequent geologic interpretation has been carried out to capture both the geological and structural information used to guide resource modelling at Victory Bore. A precursor interpreted structural mapping study carried out by Surefire Resources NL shows a clear relationship between observable strong linear magnetic anomalies and Vanadium mineralization. Mineralization modelling has been guided by the combined geological and structural information as is currently available. Mineralisation envelopes were interpreted in E-W and plan (bench) section slices using all available drill hole data. A nominal 0.1-0.15% V₂O₅ edge lower cut-off was initially used to delineate anomalous Vanadiferous mineralization. The mineralization developed was also locally partially adjusted to capture and delineate the extends of mineralization in sub-optimally drilled areas.

	The mineralisation envelopes are contained within a reasonably scaled, interpreted geological and structurally mapped package that is confirmed to correlate with the majority of samples / observed V₂O₅ mineralization.
Dimensions	The majority of the geologically interpreted Victory Bore mineralised occurrence has an approximate 7200m strike length. The mineralisation interpreted width ranges from approximately 30 m to 150 m depending on the zone observed. Mineralization in the majority of the deposit area extends and has been modelled to a depth of approximately 250 m below topographic surface. Mineralisation has been modelled commencing immediately below current topographic surface.
Estimation and modelling techniques	All available RC drilling data was used to build the mineralisation model and for guiding Mineral Resource estimation. Recent verification RC drilling carried out by Surefire has also enabled some of the estimated resources to be assigned a higher level of resource estimation confidence and therefore higher level of resource reporting classification. Surefire has acquired new assay information from recent drilling programs. An updated drilling, geological logging and assay database was used to define and model the mineralised domains for Vanadium (V₂O₅%). Also included were other ancillary element analytical items for use in material characterization in preliminary mining and processing studies. The main additional analytical items included TiO₂(%), Fe(%), Al₂O₃(%), Co(%), Cr₂O (%), SiO₂(%), P(%), Cu(%), Ni(%) & LOI(%). The majority of drill collar positions have been surveyed. Newly drilled holes were accurately DGPS surveyed by Surefire. Some of the historic collar positions were adjusted according to Topographic DTM surface data. Some historical un-surveyed drill hole collar elevations were draped onto a 'pre-mining' topographic DTM surface and were checked in order to match the known surveyed drilling. The survey control for collar positions is considered adequate for the estimation of resources as stated. The mineralised domains were interpreted from the drilling data and Geomagnetic data provided by Surefire. Sets of cross-sectional 3D strings were generated throughout the deposit area in the E-W orientation. These were then used to interpret and connect to generate 3D wire-frames. The resulting V₂O₅ mineralization wire-frame domain was then used for statistical analysis and grade estimation. The development of mineralization wire-frame was tightly controlled and not extended (extrapolated) beyond 1 average section spacing from the last drill-hole 'point of observation' but some extension was permitted where clear geomagnetic mapping data showed clear extensions of V₂O₅ mineralization. A set of wire-frame weathering surfaces and broad material type wire-frames were also modelled to highlight the near surface highly weathered thin material as well as the underlying transitional material types. These material types were used to assign basic bulk density characteristics for the deposit. Spatial statistical analysis was carried out on the main V₂O₅ assay data item and all other important ancillary analytical items. Sample data was composited to two (2) metre down-hole intervals initially based on the assayed V₂O₅ item intervals. This also included equivalent compositing for the ancillary TiO₂(%), Fe(%), Al₂O₃(%), Co(%), Cr₂O (%), SiO₂(%), P(%), Cu(%), Ni(%) & LOI(%). The composite probability distributions for all analytical items were interrogated to review localized average grades, composite 'outlier' values and related coefficient of variation levels. The main V₂O₅ composite item was used to generate both down-hole and where possible longer range between hole semi-variograms models to establish interpolation ranges and relative nugget and sill ratios used in Ordinary Kriging interpolation for block model grade assignment. Similar analysis was carried out for TiO₂(%), Fe(%), Al₂O₃(%), Co(%), Cr₂O (%), SiO₂(%), P(%), Cu(%), Ni(%) & LOI(%). One (1) block model was constructed for the total deposit area combining the basic lithology and mineralization modelling for the main V₂O₅ item. The Block model was constructed using a 3D array of blocks with dimensions of using 5.0 m x 20.0 m x 5.0 m (E-W, N-S, Bench) block cells coded with the mineralisation wire-frames. The Block Model coordinate boundaries (GDA94 MGA Zone 50) are; 693100m E to 696400m E - (660 x 5 m blocks) 6867400m N to 6874700m N - (365 x 20 m blocks)

	150 m RL to 480 m RL - (66 x 5.0 m benches) The Ordinary Kriging (OK) interpolation method was used for the estimation of the main V₂O₅ item using variogram parameters defined separately from the geostatistical analysis of each mineralization zone. Separate dedicated Kriging interpolation runs were also carried out for each of the ancillary analytical items and used specific interpolation parameters associated for each item. No extrapolation of grades outside the mineralization wire-frame was permitted. A minimum of 1 composite selected – Max of 24 composites within search ellipsoid. A maximum of 2 composites per hole allowed. Search ellipsoids based on Semi-Variograms Showing search ellipsoid ranges of approximately 300m (long), 150m (Down-Dip) and 20m (across) ranges. A minor outlier ‘distance of restriction’ approach was applied during the interpolation process for all items in selected domains in order to reduce the unwanted spatial influence of very high-grade outlier composite samples. The distance of restriction was set at 40m and with the grade threshold value set within an approximate the 99th to 99.5th percentile level. Dry Bulk Density (“density”) was initially assigned by mineralization domain with the designation of values assigned representing the average bulk density for each material type. This broad assignment was then overprinted by down-hole probe Bulk Density measurement data (consolidated to ~5100 measurements) composited and interpolated to block model using ‘Nearest Neighbour’ interpolation.
Moisture	All tonnages are reported on a dry basis.
Cut-off parameters	A 0.26% and 0.3% V ₂ O ₅ lower cut-off has been applied for reporting resource reported tonnes and grade. This cut-off is considered in line with current mineralization type, likely favourable processing route and the Vanadium price in conjunction with associated possibly recoverable beneficial elements such as TiO ₂ and Al ₂ O ₃ .
Mining factors or assumptions	It is assumed the majority of the deposit will be mined using open pit mining methods as the deposit outcrops at surface. Detailed grade control will refine resource and expected reserve detail prior to any mining activity.
Metallurgical factors or assumptions	Metallurgical recovery assumptions have not been used, however reasonable mineral recovery levels are expected through magnetic media separation based on an early-stage understanding of the likely metallurgical characteristics of the known mineral species observed from drill samples and preliminary laboratory bench scale concentrate recovery tests as well as some Davis Tube Recovery Tests showing initial good Vanadium concentrate recoveries.
Environmental factors or assumptions	The resource is located in an area of historic mining. It is assumed no significant environmental factors would prevent activation of mining and related mineral processing activities.
Bulk density	Dry Bulk Density (DBD) has been determined from a very large number of down-hole densitometer measurements taken as part of the recent Surefire drilling program. The bulk densities measured appear sufficiently variable considering the distribution of the mineralization zones and are deemed representative for the rock material and mineralization types described for the Victory Bore deposit. The density measurements have been averaged in deposit areas according to the geologically logged material type characterization where densitometer readings are not available. Locally where measurement data is available these have been interpolated locally into the block model. The bulk density values applied in the deposit are: Highly weathered zone = 2.22 – 2.34 t/m³, Transitional Zone = 2.57 -2.74 t/m³ and Fresh / Sulphide Zone = 2.98 -3.42 t/m³. Locally the nearest neighbour assigned values can be both slightly higher and lower than the averages shown here.
Classification	The classification was considered appropriate on the basis of drill hole spacing, sample interval, geological interpretation, and representativeness of all available assay data. The classification criteria has also employed multiple ‘ancillary’ interpolation parameters including ‘distance of composite to model block’ (DIST1), ‘number of composite available within the search ellipsoid’ (COMP1) for each block interpolation and the local kriging variance’ (KERR1) for each block. The DIST1, COMP1 and KERR1 item values are ‘condensed into a ‘quality of estimate’ (QLTY) item. From the final QLTY item a 3D ‘consolidated’ Resource Category wireframe was developed. This was then applied to the RCAT Resource Reporting Item in the block model. Classification of the resources has been assigned by the Competent Person and includes a series of project specific ‘modifying factors’ appropriate for the Resource estimation. A small amount of Measured Resources is estimated with some Indicated Resources. The majority of mineralization is in outer more sparsely drilled zones being classified as Inferred. The Measured Resource component is restricted to some of the more densely drilled zones where reliable grade continuity is observed and where local estimated variance is lowest. Also considered is the very good metallurgical processing recovery

	information thus far measured for the mineralized material tested at laboratory scale and in Davis Tube Recovery Testing.
Audits or reviews	The mineral Resource model and estimation has been internally reviewed by Surefire. No major concerns relating to the assumptions or estimation findings or classification issues have been identified.
Discussion of relative accuracy/ confidence	The Competent Person considers the mineral resource to be a robust and reliable global estimate of the contained V₂O₅ and related mineralization. The estimation has been constrained within defined mineralisation wire-frames. The Resource classification applied to the Resource reflects the Competent Person's confidence in the estimate.