

Arrakis RC Drilling Complete, Final Air-Core Results Received & Heritage Survey Complete

- Arrakis RC drilling is complete, with seven RC holes for 1,374m. Drilling was completed below the recently reported air-core intercepts.
- All results from the large-scale Caladan air-core drilling program have now been received.
- Results from the 136-hole program have defined the **2.2km long mineralised Arrakis structure** occurring within a broader 3.2km long and 200m wide regolith anomaly.
- Highlights from the completed AC program include:
 - **11m @ 2.1 g/t Au^{*1}** from 90m in **25IWBAC023**, including
 - **7m @ 3.1 g/t Au** from 92m.
 - **12m @ 1.1g/t Au^{*1}** from 45m in **25IWBAC032**.
 - **12m @ 0.5 g/t Au^{*1}** from 70m to EOH in **25IWBAC032**.
 - **11m @ 1.4 g/t Au^{*1}** from 71m in **25IWBAC044**, including
 - **6m @ 2.3 g/t Au** from 72m.
 - **22m @ 0.5g/t Au^{*1}** from 75m in **25IWBAC099**, including
 - **7m @ 1.2 g/t Au** from 75m.
 - **5m @ 0.7 g/t Au^{*1}** from 112m to EOH in **25IWBAC052**.

**1: Previously released air-core drilling results see ASX releases dated 10 July 2025, 31 July 2025 & 18 August 2025.*

- The first of two heritage surveys across the Arrakis Prospect is complete, with the second survey scheduled for the end of September.

For further information or to ask questions in relation to this announcement, please visit our Investor Hub at <https://yandalresources.com.au/link/PREDXr>

Contact Us

A: Suite 1, Level 3, 1138 Hay Street,
West Perth WA 6005
T: +61 (0)8 9389 9021
E: yandal@yandalresources.com.au
yandalresources.com.au | ASX:YRL

Board and Management

Chris Oorschot	Managing Director/CEO
Greg Evans	Non-Exec Chair
Katina Law	Non-Exec Director
Greg Fitzgerald	Company Secretary

Yandal Resources Ltd (ASX: YRL, “Yandal Resources” or the “Company”) is pleased to report that all assay results from the large-scale Caladan air-core (AC) drilling program that commenced in early June have been received (see Tables 2 and 3). Fire assay results from the final 14 AC holes have been received and reported within this release. The AC program included 136 holes across ten lines, for a total of 13,933m of drilling, testing the Caladan target area over 6.4km of strike (See Figure 1). Lines are 800m spaced with two 400m spaced lines along strike to the north and south of previous drilling completed across the Arrakis Prospect earlier this year.

In addition to the above, RC drilling is now complete across the Arrakis Prospect, with seven RC holes totalling 1,374m drilled, testing below significant air-core intercepts across the 2.2km extent of the recently identified mineralised structure (see figures 1 and 2). All samples have been dispatched to the lab, with results expected throughout October.

The Company is also pleased to report that the first of two heritage surveys across the Arrakis prospect is complete, clearing 200 metre spaced lines across the full extent of the mineralised structure. The second heritage survey is scheduled for the end of September.

The Caladan target area, including the Arrakis Prospect (*within E 53/1843, E 53/2304, E 53/2192 and E 53/1882*), is part of the broader Ironstone Well-Barwidgee Gold Project (see Figure 3), located 60km south of the Jundee mining complex (ASX: NST), and 18km north of the recent Siona discovery, within the Yandal Greenstone Belt.

Caladan Air-Core Results Overview

Air-core results from the final 14 holes of the Caladan air-core program have been received. All results and drilling details are provided in Tables 2 and 3, and are plotted in Figures 1 and 2. The completed program included 136 air-core holes for 13,933m of drilling, with the average hole depth of 102m. Air-core drilling was completed across ten 400 metre or 800m spaced lines over 6.4km of the Caladan fold. Significant intercepts from the final 14 air-core holes that include 25IWBAC115-116, 25IWBAC125-132 and 25IWBAC146-149 are listed in Table 3 and are highlighted in Figure 1.

Results from air-core drilling have demonstrated several mineralised and anomalous gold trends. The most significant being the interpreted 2.2km long mineralised structure that defines the Arrakis Prospect, with intercepts including:

- **11m @ 2.1 g/t Au^{*1}** from 90m in **25IWBAC023**, including
 - **7m @ 3.1 g/t Au** from 92m.

- **12m @ 1.1g/t Au^{*1}** from 45m in **25IWBAC032**.
- **12m @ 0.5 g/t Au^{*1}** from 70m to EOH in **25IWBAC032**.
- **11m @ 1.4 g/t Au^{*1}** from 71m in **25IWBAC044**, including
 - **6m @ 2.3 g/t Au** from 72m.
- **22m @ 0.5g/t Au^{*1}** from 75m in **25IWBAC099**, including
 - **7m @ 1.2 g/t Au** from 75m.
- **5m @ 0.7 g/t Au^{*1}** from 112m to EOH in **25IWBAC052**.

**1: Previously released air-core drilling results see ASX releases dated 10 July 2025, 31 July 2025 & 18 August 2025.*

These significant intercepts occur within a broader envelope defined by gold anomalies within the air-core drilling that is approximately 200m wide and striking over 3.2km (air-core anomalies are defined as either a 1m sample >0.1 g/t Au at the bottom-of-hole or 4m @ 0.1 g/t Au or better within the completely or partially weathered rock within an individual air-core hole).

Partially weathered to weathered mineralisation observed within air-core drilling is associated with a broad zone of deformation and alteration hosted on the northeast margin of a 500m wide dolerite sequence (includes basalt, dolerite and gabbro).

Arrakis RC Drilling

A seven-hole RC program including 1,374m of drilling is now complete across the Arrakis Prospect (see Table 4). The RC drilling program has tested the fresh rock positions below recent air-core intercepts (Figures 1 and 2) to confirm mineralisation continuity within fresh rock and define the geometry of the host structures. RC drilling has successfully intercepted broad zones of shearing and alteration in all holes. This includes a wide range of alteration assemblages and deformation textures. Further geological observations will be provided once results are received over the next 3-6 weeks.

Heritage Surveys

The first follow-up line clearing survey has been completed across the Arrakis Prospect (see Figures 1 and 2). This survey sought to clear 200m spaced drill lines across the Arrakis Prospect. Authorisation to clear the survey lines is expected once the survey report is received in 4-6 weeks.

A second heritage survey is scheduled for late September or October. This survey aims to clear closer spaced lines (up to 80m spaced) across the Arrakis Prospect and broader Caladan target area.

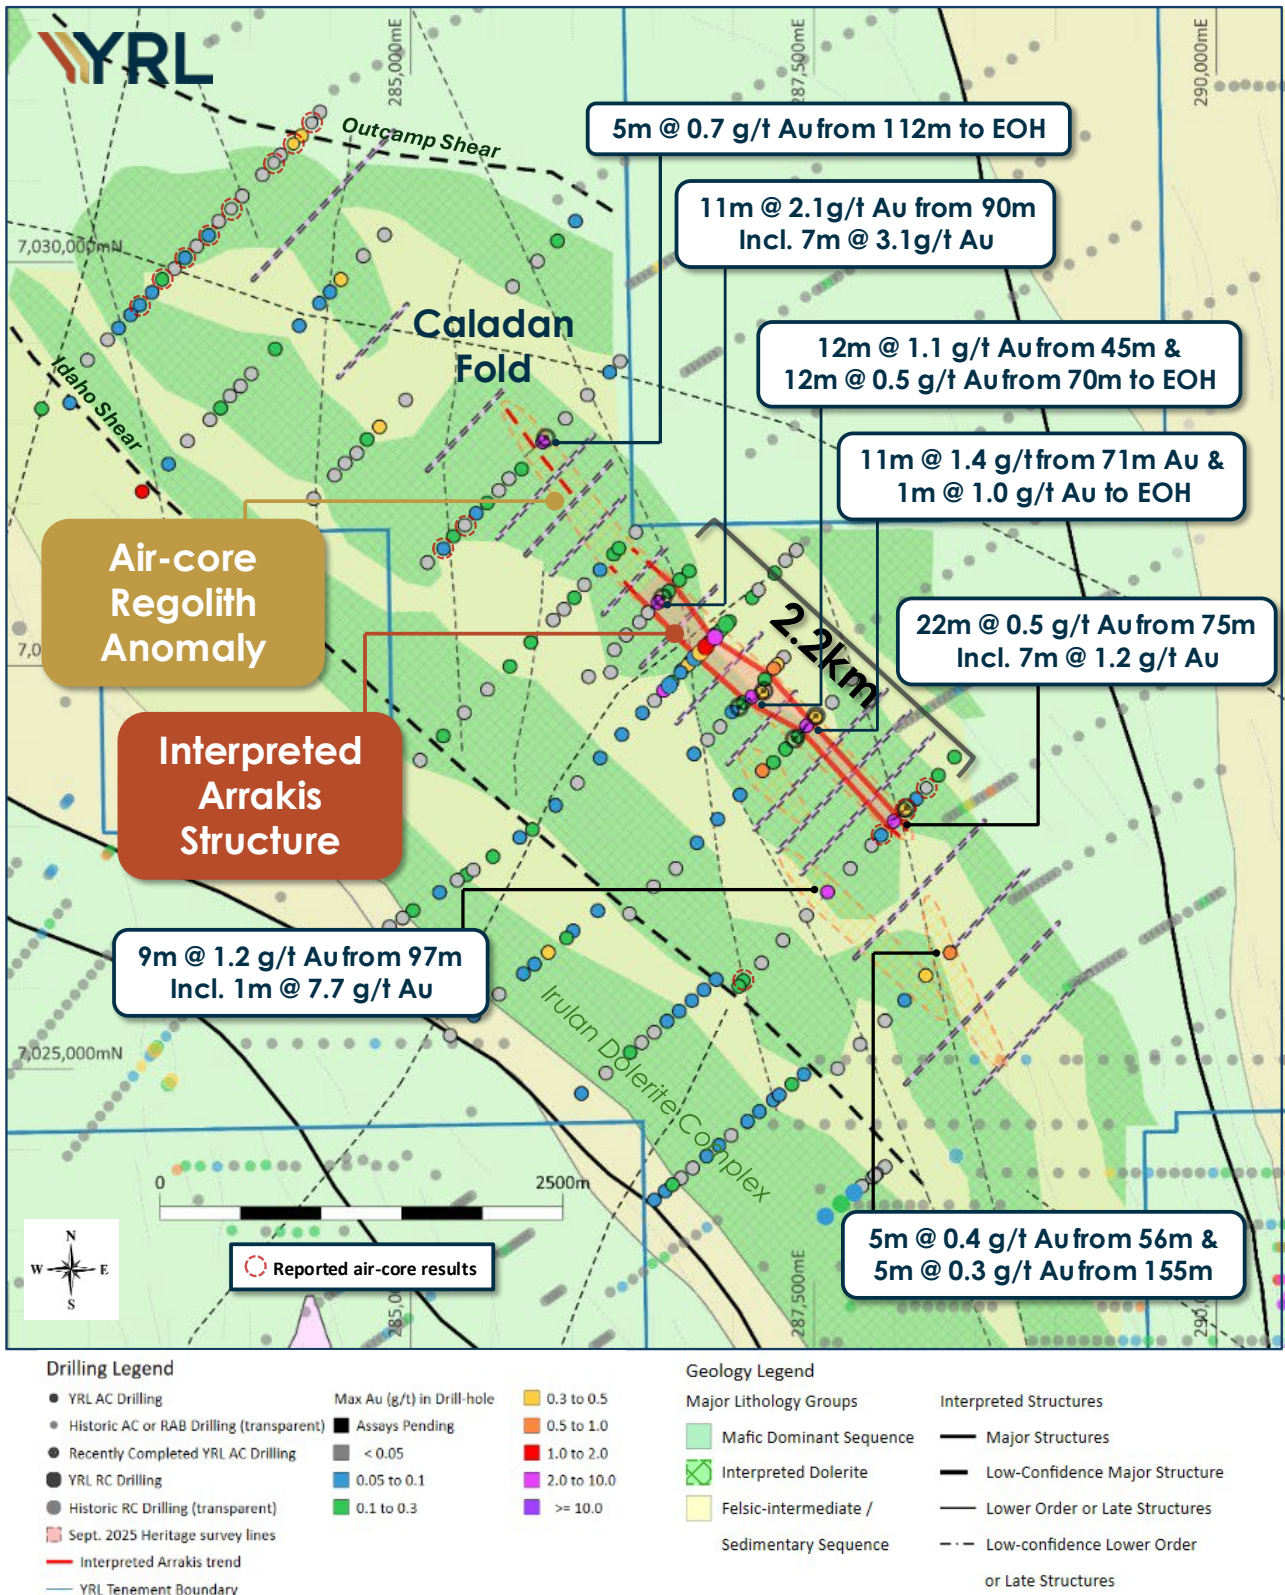


Figure 1: A collar plan over the Caladan target area, showing simplified bedrock geology interpretation across the Caladan and northern Irulan target areas (interpretation based on bottom-of-hole geology). The locations of effective historic drilling (>20m depth, excluding all Eagle Mining and Hunter Resources RAB drilling from 1995) and all Yandal drilling are plotted. Collars are thematically coloured by max Au (g/t) in the hole.

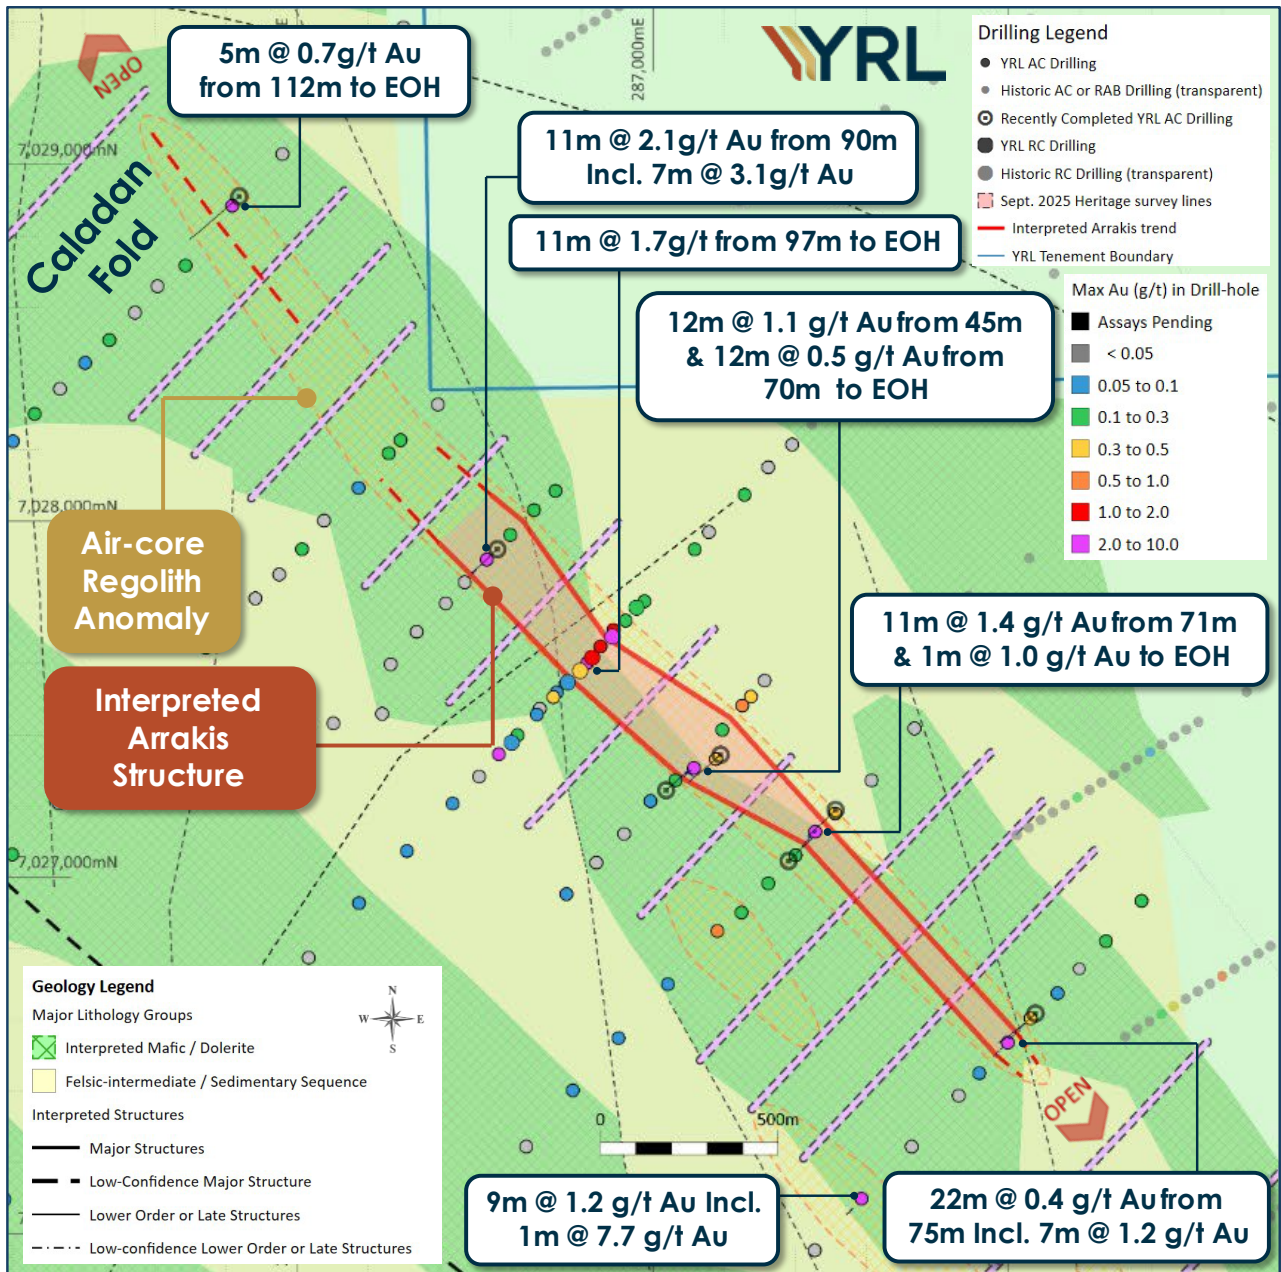


Figure 2: A collar plan over the Arrakis Prospect within the Caladan target area (see Figure 1), showing simplified bedrock geology interpretation. The locations of effective historic drilling (>20m depth, excluding all Eagle Mining and Hunter Resources RAB drilling from 1995) and all Yandal drilling are plotted. Collars are thematically coloured by max Au (g/t) in the hole. The red line represents the approximate position of the interpreted Arrakis mineralised structure. Dashed yellow polygons represent air-core regolith anomalies (Results include ~4m @ 0.1 g/t Au or greater with the upper profile or the bottom-of-hole sample is 0.1 g/t Au or greater).

Next Steps

Further air-core and RC drilling is scheduled across the Arrakis Prospect and broader Caladan target area after RC drilling results are received. This will include air-core drilling to the northwest and southeast of the currently defined Arrakis structure, and infill air-core drilling of parallel regolith anomalies (see Figure 1) within the Caladan target area. Further RC drilling will focus on infilling the currently defined extents of the Arrakis Prospect subject to future drilling results.

Looking Ahead

The Company maintains a robust cash position and a very active exploration schedule for the second half of 2025. Notable near-term activities and news flow include;

1. Results from RC drilling across the Arrakis prospect are anticipated in the next 3-6 weeks;
2. A second heritage survey to clear closer spaced lines across the Caladan target area, including the Arrakis Prospect, is scheduled for late September or October.
3. First results from AC drilling across the New England Granite target area are anticipated in the coming weeks.
4. Completion and settlement of the Gordons Gold Project Tenement Sale Agreement for a total consideration of A\$2.81m in cash and Horizon Minerals (ASX: HRZ) Shares in the coming months.

Authorised by the board of Yandal Resources

For further information, please contact:

Chris Oorschot

Managing Director
Yandal Resources Limited
yandal@yandalresources.com.au

Greg Fitzgerald

Company Secretary
+61 8 9389 9021
yandal@yandalresources.com.au

About Yandal Resources Limited

Yandal Resources has a portfolio of advanced gold exploration projects in the highly prospective Yandal and Norseman-Wiluna Greenstone Belts of Western Australia.

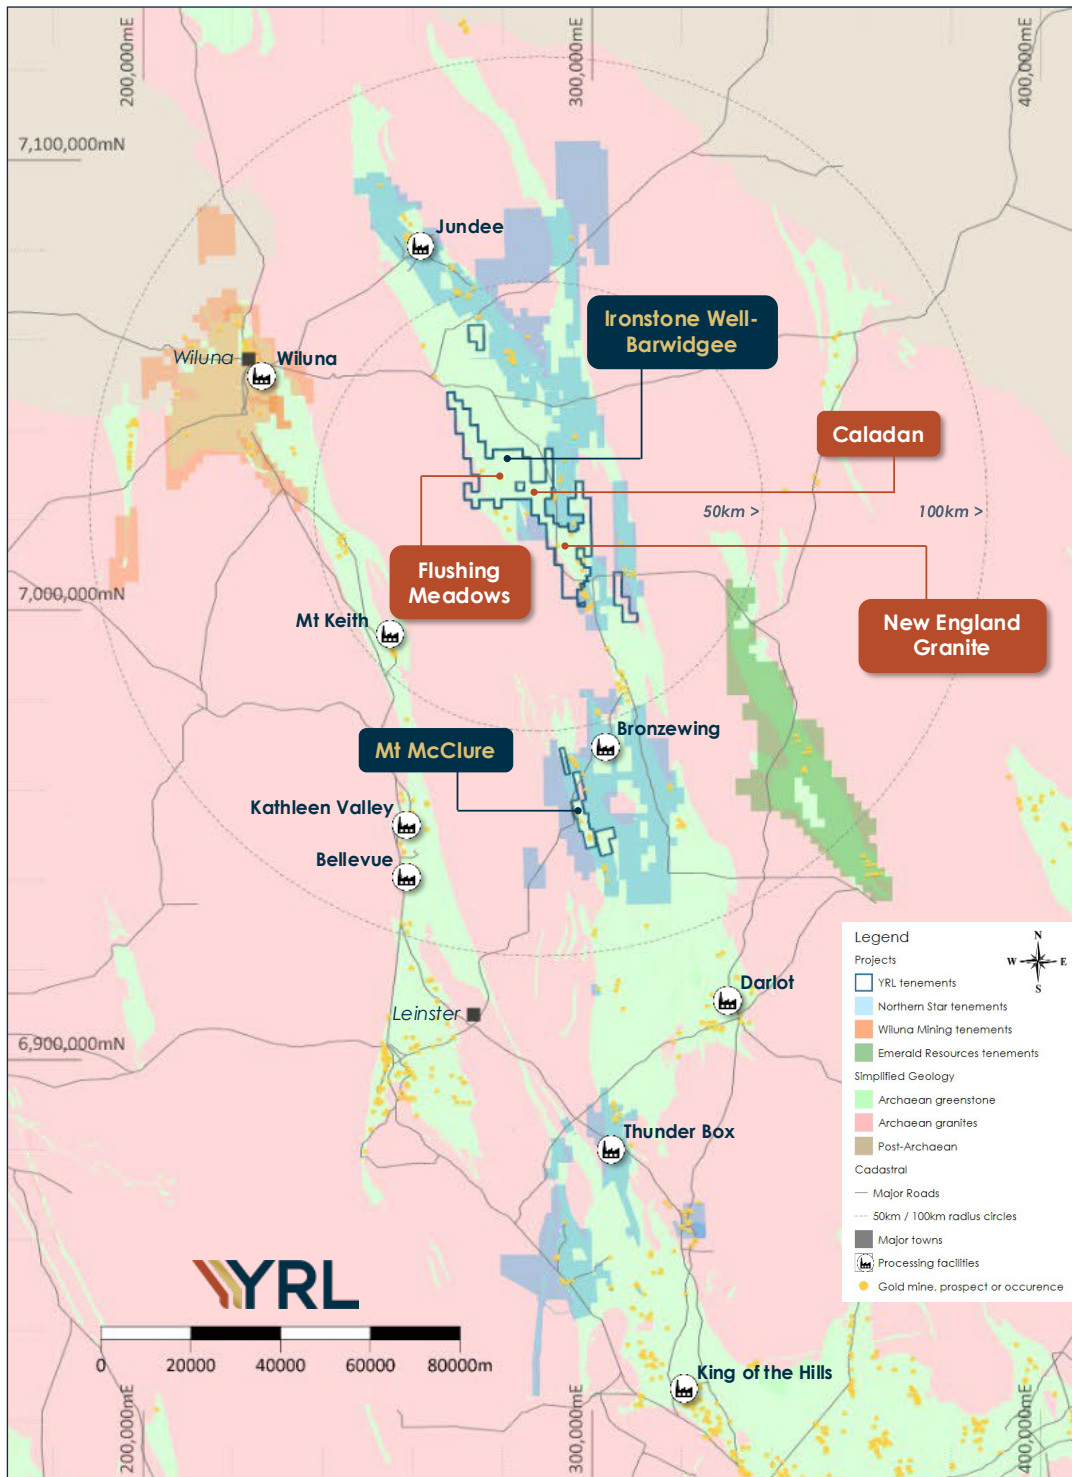


Figure 3: Yandal Resource exploration Project locations within the Yandal Greenstone Belt.

Table 1 – Yandal Resources Ltd - Mineral Resource Summary

Deposit	Indicated			Inferred			Total		
	Tonnes (‘000s)	Grade (g/t)	Au (oz)	Tonnes (‘000)	Grade (g/t)	Au (oz)	Tonnes (000’s)	Grade (g/t)	Au (Oz)
Ironstone Well									
Flushing Meadows ¹	2,141	1.3	91,000	5,245	1.1	177,000	7,386	1.1	268,000
Mt McClure									
Challenger ²				718	1.9	44,000	718	1.9	44,000
Success ³				1,255	1.9	75,000	1,255	1.9	75,000
Parmelia ⁴				252	2.1	17,000	252	2.1	17,000
HMS Sulphur ⁵				1010	1.2	39,000	1010	1.2	39,000
Gilmore ⁶				134	1.7	7,200	134	1.7	7,200
Sub-total - MMC				3,369	1.7	182,200	3,369	1.7	182,200
Gordons									
Gordons Dam ⁷				365	1.7	20,000	365	1.7	20,000
Grand-total⁸	2,141	1.3	91,000	8,979	1.3	379,200	11,120	1.4	470,200

Due to the effects of rounding, totals may not represent the sum of the individual components.

1. Reported above 0.5g/t Au lower cut-off grade; refer to Yandal Resources Ltd ASX announcement dated 4 November 2020 for full details. 2. Reported above 1.0g/t Au lower cut-off grade; refer to Yandal Resources Ltd ASX announcement dated 22 August 2022 for full details 3. Reported above 1.0g/t Au lower cut-off grade; refer to Yandal Resources Ltd ASX announcement dated 6 September 2022 for full details. 4. Reported above 1.0g/t Au lower cut-off grade; refer to Yandal Resources Ltd ASX announcement dated 20 September 2022 for full details 5. Reported above 0.5g/t Au lower cut-off grade within this announcement 6. Reported above 1.0g/t Au lower cut-off grade within this announcement 7. Reported above 1.0g/t Au lower cut-off grade; refer to Yandal Resources Ltd ASX announcement dated 6 April 2023 for full details 8. All Resources are reported as global estimates, not constrained by optimised pit shells.

Competent Person Statement

The information in this document related to Exploration Targets and Exploration Results, geology and data compilation is based on information reviewed or compiled by Mr Christopher Oorschot, a Competent Person who is a Member of The Australasian Institute Geoscientists. Mr Oorschot is the Managing Director of the Company, is a full-time employee and holds shares and options in the Company. Mr Oorschot has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the ‘Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves’. Mr Oorschot consents to the inclusion in this announcement of the matters based on this information in the form and context in which it appears.

The information in this announcement that relates to the Flushing Meadows, Mt McClure and Gordons Dam Mineral Resource Estimates is based on information compiled and generated by Andrew Bewsher, an employee of BM Geological Services Pty Ltd (“BMGS”). Both Andrew Bewsher and BMGS hold shares in the company. BMGS consents to the inclusion, form and context of the relevant information herein as derived from the original resource reports. Mr Bewsher has sufficient experience relevant to the style of mineralisation and type of deposit under consideration and to the activity which is being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the JORC ‘Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves’.

YRL confirms that it is not aware of any new information or data that materially affects the information included in the original market announcement. The Company confirms that the form and context in which

the Competent Person's findings are presented have not been materially modified from the original market announcement.

Forward Looking Statements

This document may contain certain forward-looking statements. Forward-looking statements include, but are not limited to, statements concerning Yandal Resources Limited's (Yandal's) current expectations, estimates and projections about the industry in which Yandal operates, and beliefs and assumptions regarding Yandal's future performance. When used in this document, words such as "anticipate", "could", "plan", "estimate", "expects", "seeks", "intends", "may", "potential", "should", and similar expressions are forward-looking statements. Although Yandal believes that its expectations reflected in these forward-looking statements are reasonable, such statements are subject to known and unknown risks, uncertainties and other factors, some of which are beyond the control of Yandal and no assurance can be given that actual results will be consistent with these forward-looking statements. Drilling results presented indicate geological potential for mineralisation but there can be no certainty that these results will eventually form part of a Mineral Resource Estimate.

Table 2 – Caladan air-core program collar location summary. Includes previously reported holes.

Prospect/ Target	Hole ID	Hole type	East (m)	North (m)	RL (mAHD)	Azimuth (degrees)	Dip (degrees)	Total Depth (m)
Caladan	25IWBAC001	AC	286682	7027473	523.2	225	-60	86.0
Caladan	25IWBAC002	AC	286730	7027519	523.1	225	-60	88.0
Caladan	25IWBAC003	AC	286889	7027695	522.6	225	-60	123.0
Caladan	25IWBAC004	AC	286356	7025964	530.0	225	-60	71.0
Caladan	25IWBAC005	AC	286506	7026132	528.8	225	-60	62.0
Caladan	25IWBAC006	AC	285057	7026914	528.5	225	-60	59.0
Caladan	25IWBAC007	AC	285200	7027064	527.3	225	-60	147.0
Caladan	25IWBAC008	AC	285331	7027208	526.2	225	-60	78.0
Caladan	25IWBAC009	AC	285614	7027495	525.4	225	-60	92.0
Caladan	25IWBAC010	AC	285744	7027645	525.0	225	-60	118.0
Caladan	25IWBAC011	AC	285883	7027783	524.7	225	-60	132.0
Caladan	25IWBAC012	AC	286014	7027921	523.6	225	-60	144.0
Caladan	25IWBAC013	AC	286173	7028093	523.1	225	-60	92.0
Caladan	25IWBAC014	AC	286291	7028227	522.6	225	-60	104.0
Caladan	25IWBAC015	AC	286396	7028327	522.2	225	-60	94.0
Caladan	25IWBAC016	AC	285475	7027352	525.7	225	-60	75.0
Caladan	25IWBAC017	AC	286102	7027432	524.0	225	-60	103.0
Caladan	25IWBAC018	AC	286239	7027459	523.8	225	-60	73.0
Caladan	25IWBAC019	AC	286263	7027598	523.7	225	-60	162.0
Caladan	25IWBAC020	AC	286336	7027689	523.6	225	-60	117.0
Caladan	25IWBAC021	AC	286418	7027769	523.5	225	-60	123.0
Caladan	25IWBAC022	AC	286471	7027828	523.3	225	-60	84.0
Caladan	25IWBAC023	AC	286533	7027892	523.1	225	-60	114.0
Caladan	25IWBAC024	AC	286599	7027961	522.9	225	-60	78.0
Caladan	25IWBAC025	AC	286666	7028031	522.3	225	-60	99.0
Caladan	25IWBAC026	AC	286726	7028085	522.1	225	-60	92.0
Caladan	25IWBAC027	AC	286757	7026953	524.5	225	-60	135.0

Prospect/ Target	Hole ID	Hole type	East (m)	North (m)	RL (mAHD)	Azimuth (degrees)	Dip (degrees)	Total Depth (m)
Caladan	25IWBAC028	AC	286841	7027041	524.1	225	-60	108.0
Caladan	25IWBAC029	AC	286919	7027122	523.6	225	-60	101.0
Caladan	25IWBAC030	AC	286993	7027214	523.1	216	-60	128.0
Caladan	25IWBAC031	AC	287063	7027272	522.7	225	-60	135.0
Caladan	25IWBAC032	AC	287115	7027307	522.5	225	-60	82.0
Caladan	25IWBAC033	AC	287177	7027332	522.3	225	-60	100.0
Caladan	25IWBAC034	AC	287195	7027414	522.3	225	-60	96.2
Caladan	25IWBAC035	AC	287251	7027482	522.3	225	-60	128.5
Caladan	25IWBAC036	AC	287275	7027507	522.3	225	-55	147.0
Caladan	25IWBAC037	AC	287314	7027552	522.3	225	-60	151.0
Caladan	25IWBAC038	AC	286644	7026244	527.9	225	-60	46.0
Caladan	25IWBAC039	AC	286775	7026402	526.9	225	-60	89.0
Caladan	25IWBAC040	AC	286903	7026549	526.5	225	-60	153.0
Caladan	25IWBAC041	AC	287042	7026700	525.4	225	-60	108.0
Caladan	25IWBAC042	AC	287181	7026849	524.4	225	-60	58.0
Caladan	25IWBAC043	AC	287324	7026983	524.0	225	-60	58.0
Caladan	25IWBAC044	AC	287456	7027128	523.1	225	-60	88.0
Caladan	25IWBAC045	AC	287614	7027272	522.8	225	-60	155.0
Caladan	25IWBAC046	AC	287735	7027418	522.7	225	-60	90.0
Caladan	25IWBAC047	AC	285103	7028139	525.3	225	-60	113.0
Caladan	25IWBAC048	AC	285263	7028301	524.6	225	-60	102.0
Caladan	25IWBAC049	AC	285405	7028444	524.6	225	-60	99.0
Caladan	25IWBAC050	AC	285545	7028585	524.1	225	-60	88.0
Caladan	25IWBAC051	AC	285687	7028717	523.7	225	-60	111.0
Caladan	25IWBAC052	AC	285818	7028885	523.2	225	-60	117.0
Caladan	25IWBAC053	AC	285959	7029030	522.5	225	-60	130.0
Caladan	25IWBAC054	AC	286095	7029176	522.1	225	-60	121.0
Caladan	25IWBAC055	AC	286233	7029318	521.5	225	-60	107.0
Caladan	25IWBAC056	AC	286299	7029385	521.3	225	-60	115.0
Caladan	25IWBAC057	AC	283332	7028578	531.8	225	-60	166.0
Caladan	25IWBAC058	AC	283496	7028748	530.7	225	-60	90.0
Caladan	25IWBAC059	AC	283613	7028891	530.1	225	-60	57.0
Caladan	25IWBAC060	AC	283753	7029023	528.6	225	-60	77.0
Caladan	25IWBAC061	AC	283877	7029170	528.4	225	-60	105.0
Caladan	25IWBAC062	AC	284009	7029307	527.2	225	-60	104.0
Caladan	25IWBAC063	AC	284158	7029462	526.9	225	-60	75.0
Caladan	25IWBAC064	AC	284307	7029606	525.6	225	-60	119.0
Caladan	25IWBAC065	AC	284432	7029745	524.6	225	-60	93.0
Caladan	25IWBAC066	AC	284565	7029892	523.4	225	-60	95.0
Caladan	25IWBAC067	AC	284704	7030038	523.2	225	-60	67.0
Caladan	25IWBAC068	AC	284836	7030169	522.6	225	-60	150.0
Caladan	25IWBAC069	AC	284396	7028534	526.0	225	-60	81.0
Caladan	25IWBAC070	AC	284526	7028679	525.5	225	-60	98.0
Caladan	25IWBAC071	AC	284664	7028816	525.1	225	-60	94.0
Caladan	25IWBAC072	AC	284805	7028979	524.3	225	-60	93.0
Caladan	25IWBAC073	AC	284968	7029146	523.4	225	-60	110.0

Prospect/ Target	Hole ID	Hole type	East (m)	North (m)	RL (mAHD)	Azimuth (degrees)	Dip (degrees)	Total Depth (m)
Caladan	25IWBAC074	AC	285785	7030005	521.2	225	-60	69.0
Caladan	25IWBAC075	AC	285910	7030131	520.7	225	-60	72.0
Caladan	25IWBAC076	AC	286021	7030253	520.4	225	-60	105.0
Caladan	25IWBAC077	AC	282708	7029091	537.4	225	-60	209.0
Caladan	25IWBAC078	AC	282992	7029393	533.2	225	-60	80.0
Caladan	25IWBAC079	AC	283118	7029518	531.6	225	-60	59.0
Caladan	25IWBAC080	AC	283261	7029673	530.3	225	-60	80.0
Caladan	25IWBAC081	AC	283394	7029813	529.4	225	-60	114.0
Caladan	25IWBAC082	AC	283534	7029960	528.4	225	-60	81.0
Caladan	25IWBAC083	AC	283671	7030099	528.1	225	-60	79.0
Caladan	25IWBAC084	AC	283808	7030252	526.7	225	-60	122.0
Caladan	25IWBAC085	AC	283954	7030409	525.5	225	-60	77.0
Caladan	25IWBAC086	AC	284079	7030541	525.1	225	-60	96.0
Caladan	25IWBAC087	AC	284192	7030663	523.9	225	-60	129.0
Caladan	25IWBAC088	AC	284321	7030782	523.4	225	-60	158.0
Caladan	25IWBAC089	AC	284436	7030930	523.2	225	-60	69.0
Caladan	25IWBAC090	AC	282883	7029127	535.6	225	-60	135.0
Caladan	25IWBAC091	AC	285632	7029848	521.7	225	-60	98.0
Caladan	25IWBAC092	AC	287035	7025514	532.0	225	-60	117.0
Caladan	25IWBAC093	AC	287176	7025658	530.7	225	-60	41.0
Caladan	25IWBAC094	AC	287309	7025798	529.8	225	-60	55.0
Caladan	25IWBAC095	AC	287455	7025953	528.3	225	-60	118.0
Caladan	25IWBAC096	AC	287586	7026098	527.1	225	-60	153.0
Caladan	25IWBAC097	AC	287727	7026244	525.8	225	-60	102.0
Caladan	25IWBAC098	AC	287859	7026387	525.5	225	-60	135.0
Caladan	25IWBAC099	AC	287997	7026536	525.2	225	-60	126.0
Caladan	25IWBAC100	AC	288137	7026675	525.2	225	-60	68.0
Caladan	25IWBAC101	AC	288273	7026821	525.1	225	-60	66.0
Caladan	25IWBAC102	AC	288373	7026934	525.0	220	-60	100.0
Caladan	25IWBAC103	AC	287648	7025004	534.4	225	-60	68.0
Caladan	25IWBAC104	AC	287787	7025155	531.4	225	-60	77.0
Caladan	25IWBAC105	AC	287942	7025301	529.7	225	-60	85.0
Caladan	25IWBAC106	AC	288063	7025427	529.2	225	-60	59.0
Caladan	25IWBAC107	AC	288195	7025581	529.0	225	-60	131.0
Caladan	25IWBAC108	AC	288345	7025722	528.4	225	-60	193.0
Caladan	25IWBAC109	AC	287249	7026901	524.2	225	-60	65.0
Caladan	25IWBAC110	AC	287401	7027062	523.2	225	-60	82.0
Caladan	25IWBAC111	AC	287512	7027179	523.2	225	-60	110.0
Caladan	25IWBAC112	AC	285950	7027850	523.8	225	-60	129.0
Caladan	25IWBAC113	AC	286076	7028001	523.5	225	-60	50.0
Caladan	25IWBAC114	AC	286258	7028190	522.9	225	-60	115.0
Caladan	25IWBAC115	AC	285202	7028224	524.8	225	-60	97.0
Caladan	25IWBAC116	AC	285334	7028371	524.8	225	-60	105.0
Caladan	25IWBAC117	AC	285473	7028508	524.4	225	-60	106.0
Caladan	25IWBAC118	AC	285608	7028659	523.9	225	-60	108.0
Caladan	25IWBAC119	AC	284592	7028754	525.3	225	-60	95.0

Prospect/ Target	Hole ID	Hole type	East (m)	North (m)	RL (mAHD)	Azimuth (degrees)	Dip (degrees)	Total Depth (m)
Caladan	25IWBAC120	AC	284728	7028902	524.6	225	-60	99.0
Caladan	25IWBAC121	AC	283819	7029095	528.3	225	-60	108.0
Caladan	25IWBAC122	AC	283942	7029231	527.5	225	-60	94.0
Caladan	25IWBAC123	AC	284498	7029815	523.9	225	-60	108.0
Caladan	25IWBAC124	AC	283186	7029591	530.9	225	-60	180.0
Caladan	25IWBAC125	AC	283317	7029734	529.6	225	-60	78.0
Caladan	25IWBAC126	AC	283456	7029892	529.4	225	-60	99.0
Caladan	25IWBAC127	AC	283598	7030027	528.1	225	-60	115.0
Caladan	25IWBAC128	AC	283745	7030166	527.4	225	-60	121.0
Caladan	25IWBAC129	AC	283885	7030330	526.5	225	-60	72.0
Caladan	25IWBAC130	AC	284149	7030615	524.0	225	-60	106.0
Caladan	25IWBAC131	AC	284271	7030733	523.9	225	-60	144.0
Caladan	25IWBAC132	AC	284384	7030863	523.2	225	-60	21.0
Caladan	25IWBAC146	AC	287063	7025548	532.0	225	-60	123.0
Caladan	25IWBAC147	AC	287917	7026450	525.2	225	-60	154.0
Caladan	25IWBAC148	AC	288061	7026604	525.0	225	-60	126.0
Caladan	25IWBAC149	AC	288198	7026743	525.3	225	-60	74.0

Table 3 – Caladan Target Area - Summary of significant air-core drilling assay results >0.1g/t Au with no more than 2m of continuous internal waste included unless otherwise stated. All intercept lengths are reported as down-hole lengths.

Hole ID	Sample type / Sub	From (m)	To (m)	Interval (m)	Au (g/t)	Comment
25IWBAC115	1m Sample	NSA				
25IWBAC116	1m Sample	NSA				
25IWBAC125	1m Sample	NSA				
25IWBAC126	1m Sample	51	52	1	0.2	Moderately weathered
25IWBAC127	1m Sample	NSA				
25IWBAC128	1m Sample	NSA				
25IWBAC129	1m Sample	NSA				
25IWBAC130	1m Sample	NSA				
25IWBAC131	1m Sample	67	68	1	0.5	Completely weathered
25IWBAC132	1m Sample	NSA				
25IWBAC146	1m Sample	29	30	1	0.1	Moderately weathered
25IWBAC147	1m Sample	NSA				
25IWBAC148	1m Sample	111	113	2	0.2	Weakly weathered
25IWBAC148	1m Sample	121	122	1	0.1	Weakly weathered
25IWBAC149	1m Sample	NSA				

NSA - no significant assays.

Table 4 – Arrakis RC program collar location summary. Please note that RC holes locations are based on preliminary coordinates taken from a handheld GPS accurate to within +/- 5m. Final surveys utilising a licensed surveyor and DGPS will be completed in the coming months.

Prospect/ Target	Hole ID	Hole type	East (m)	North (m)	RL (mAHD)	Azimuth (degrees)	Dip (degrees)	Total Depth (m)
Arrakis	25IWBRC0040	RC	287381	7027046	523.3	49.6	-58.8	162
Arrakis	25IWBRC0041	RC	287513	7027189	523.2	228.6	-57.6	186
Arrakis	25IWBRC0042	RC	287037	7027245	522.9	50.3	-60.3	180
Arrakis	25IWBRC0043	RC	287190	7027344	522.3	230.3	-59.5	180
Arrakis	25IWBRC0044	RC	286563	7027921	523.0	230.9	-59.9	168
Arrakis	25IWBRC0045	RC	285838	7028911	523.2	230.9	-60.8	288
Arrakis	25IWBRC0046	RC	288075	7026618	525.1	230.9	-60.1	210

Relevant Previous ASX Announcements

- RC Drilling Commences Across Arrakis, 1 September 2025
- Arrakis Extended to Over 2.2km in Strike, 18 August 2025
- Caladan AC Results Further Extend Arrakis Mineralisation, 31 July 2025
- Caladan AC Shows Early Signs of Scale, 10 July 2025
- Caladan Air-Core Drilling Program Commences, 5 June 2025
- RIU Sydney Presentation, 7 May 2025
- Arrakis RC Drilling Results, 30 April 2025
- Ironstone Well-Barwidgee Exploration Update, 25 February 2025
- Caladan Air-Core Drilling Demonstrates Discovery Potential, 15 January 2025
- Air-core Drilling Commences Across Caladan and Irulan, 10 October 2024
- Oblique Diamond Drilling Results, 3 September 2024
- IWB Soil Results and NEG Diamond Drilling Complete, 12 August 2024
- Large-scale Gold Anomalies Across Emerging Targets, 15 July 2024
- Gold Coast Investment Showcase Presentation, 20 June 2024
- Exploration Update – IWB Ground Gravity Survey, 11 June 2024

Appendix 1 – Ironstone Well-Barwidgee Gold Project, Caladan Air-Core Drilling JORC Code (2012) Table 1, Sections 1 and 2

Mr Christopher Oorschot, Managing Director of Yandal Resources, compiled the information in Section 1 and Section 2 of the following JORC Table 1 and is the Competent Person for those sections. The following Table and Sections are provided to ensure compliance with the JORC Code (2012 edition) requirements for the reporting of Exploration Results.

Section 1 Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	<i>Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling.</i>	- Yandal Resources has completed multiple lines of air-core (AC) drilling across the core of the Caladan target area. The drilling utilised an 85mm air-core blade reaming down to an average down-hole depth of 103m. Hole depths vary between 41m to 209m. All air-core holes were drilled to fresh rock or until blade refusal. Holes were drilled at an angle of -60° to the southwest. Groundwater was often encountered during the process of drilling; in the limited number of times where excessive water was encountered holes were close to the target depth. - Yandal Resources (YRL) air-core drilling samples were collected via a rig-mounted hydraulically operated cyclone and splitter. One split was collected for each meter and then sent to a lab for further analysis. - Historic RAB drilling completed by Eagle Mining and Hunter Resources was detailed in the ASX release dated 15 July 2024, the original open-file reports are referenced below: - For historic RAB drilling completed by Eagle Mining in 1995, derived from WAMEX Report A047408, samples were taken over discrete lithological changes of varying lengths. Holes were terminated once a recognisable saprolitic horizon was intercepted. - For historic RAB drilling completed by Hunter Resources in 1995, derived from WAMEX Report A047408, samples were collected as 4m composites from the transported/residual interface to the bottom of the hole.
	<i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i>	For YRL Air-core drilling, the cone splitter is regularly cleaned and inspected. The 1m bulk samples are laid out on the ground in drill order. These samples are regularly inspected for contamination, and the volume of the bulk sample is monitored. The cyclone was routinely cleaned to ensure no material buildup.
	<i>Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a</i>	AC drilling was used to obtain 1m samples from which a portion, between 1-3kg in weight, was dispatched to Intertek Minerals: samples were crushed and pulverised to produce a 50g charge for lead collection fire assay with OES (Optical Emission Spectroscopy) finish for gold determination with a 0.005ppm detection limit.

Criteria	JORC Code explanation	Commentary
	30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.	
Drilling techniques	Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).	- For YRL air-core drilling, an 85mm air-core blade was used. - For YRL RC drilling, a 139mm diameter face sampling bit and hammer was used.
Drill sample recovery	Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	- For YRL holes, air-core drilling recoveries are visually assessed by the supervising geologist, and any low-volume or oversized sample piles are recorded, along with any damp or wet samples. Drill depths are routinely verified at the completion of each drill rod (every 6m). - Within the limited drilling completed, there appears to be no correlation between sample recovery and sample grade.
Logging	Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. The total length and percentage of the relevant intersections logged.	- For YRL drilling, all air-core holes have been logged in full by a qualified and experienced geologist. Logging data was captured in MX Deposit data capture and database software. All drilled intervals were logged for colour, weathering, lithology, deformation, veining and sulphide species. End-of-hole samples were sieved and retained in labelled and annotated chip trays. Chip trays will be transported to Perth for long-term storage and are available for review. - In addition to geological logging, the magnetic susceptibility of each interval is measured using a KT-10 magnetic susceptibility metre, with a sensitivity of 1×10^{-6} SI Units. Magnetic susceptibility readings are quantitative in nature.

Criteria	JORC Code explanation	Commentary
Sub-sampling techniques and sample preparation	<i>If core, whether cut or sawn and whether quarter, half or all core taken.</i> <i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i> <i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i> <i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i> <i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i> <i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i>	- YRL Air-core drilling utilised a rig-mounted cone splitter installed directly below and in line with the rig-mounted cyclone. One 1-3kg sub-samples is collected into calico bags labelled with a unique alpha-numeric ID. Most samples collected were dry; if samples were damp or wet, this was noted in the sample records. - Field duplicates were collected at an initial rate of 1 duplicate for every 50 samples collected. - Standards and blanks were routinely inserted into the sample sequence at a frequency of 1 standard or blank for every 20 routine samples. - For labs used by YRL, internal lab quality control measures include lab duplicates and the insertion of lab standards and blanks
Quality of assay data and laboratory tests	<i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i> <i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i> <i>Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.</i>	- For YRL air-core drilling, samples were assayed at the following labs using the following methods: - Intertek Minerals in Maddington, Western Australia, assayed using a 50g charge for lead collection fire assay with OES (Optical Emission Spectroscopy) finish for gold determination with a 0.005ppm detection limit. - This is considered a total digest and appropriate for the targeted style of mineralisation. - Magnetic susceptibility measurements were taken every meter using a KT-10 V2 instrument with a sensitivity of 1×10^{-6} SI Units. - YRL QAQC field protocols include the insertion of commercially prepared certified reference material (CRM) and blank material at a rate of approximately 1 CRM/blank for every 20 samples collected. CRMs used are un-identifiable by the lab when received. QAQC performance is monitored upon receipt of each batch of results and re-assessed once all samples for a program are received. - Laboratory QA/QC protocols involve inserting internal lab standards using CRMs, blanks, repeat analysis of pulps and screen tests (the percentage of pulverised material passing 75µm mesh). Laboratory QAQC results are reported with each batch. Laboratory QAQC performance is monitored upon receipt of each batch of results and assessed again once all

Criteria	JORC Code explanation	Commentary
Verification of sampling and assaying	The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data.	samples for a program are received. - Significant intercepts from YRL AC drilling are verified by YRL geologists through the visual inspection of chips, reviewing the spatial location of mineralisation relative to previous intercepts, and in the case of high-grade gold intercepts, the panning of drill fines to visually confirm gold in samples. - No twinned holes have been completed across the Caladan Target area - For YRL AC Drilling, primary sampling and logging data are captured directly into the MX deposit application and uploaded directly to the cloud-hosted MX Deposit database. - The first assay result for each sample is used for the reporting of significant intercepts, and no adjustments have been made to the assay data.
Location of data points	Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control.	- All drill collar locations were initially pegged and surveyed using a handheld Garmin GPS, which was accurate to within 3-5m. RLs are determined using a detailed surface DTM. - No down-hole survey data was collected for AC drilling. - All spatial data presented is relative to UTM MGA94 Zone 51s. - Data from aerial surveys has been used to generate a topographic surface model; this model is used to validate the RL of surveyed holes. The terrain around the prospect area is relatively flat, with no severe changes in topography.
Data spacing and distribution	Data spacing for reporting of Exploration Results. Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Whether sample compositing has been applied.	- For AC drilling across the Caladan target area, holes were variably spaced between 50m to 200m along ten 400m to 800m spaced drill lines, oriented towards 045°, that transect the Caladan fold structure. All collar details/coordinates are supplied in Table 2. - The hole/data spacing and distribution used for AC drilling completed across the Caladan target area is insufficient to establish a preliminary assessment of the degree of geological and grade continuity, nor is it appropriate for estimating a Mineral Resource. - Only significant gold intercepts have been reported, meaning all intervals >0.1 g/t Au (unless otherwise stated). These intervals have been reported as a composite where the intercept includes more than one sample. Composites may include up to 2m of continuous internal waste unless otherwise stated, and the final composite grade must exceed 0.1g/t Au. Only 1m samples were used for the reporting of significant intercepts. The first assay result was used for all significant intercepts reported. All intercepts have been reported relative to down-hole length. All intercepts are reported in grams per tonne (g/t). If a single composite includes material with a high-grade sub-interval, this has been reported as a sub-interval. Reported composite intervals were calculated and reviewed by Mr. Christopher Oorschot. All significant intercepts are detailed in Table 3.

Criteria	JORC Code explanation	Commentary
Orientation of data in relation to geological structure	Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	For AC drilling, holes within the broader Caladan Prospect have been drilled at a -60° angle to the southwest to target sub-vertical structures in interpreted folded stratigraphy based on the interpretation of ground gravity data. As only limited broad spaced drilling has been completed to date, further drilling is needed to verify the geometry of mineralisation and to understand any potential sampling bias associated with drilling direction.
Sample security	The measures taken to ensure sample security.	All YRL samples were collected on-site under the supervision of a qualified geologist. Calico bags are tied, grouped into larger poly-weave bags that are cable tied, and then placed into sealed bulka bags for transport. The labelled bulka bags are then transported directly to the laboratory for analysis via a commercial freight company or YRL geologists. Where a commercial freight company is used for transport, consignment notes and confirmation of receipt by the lab were monitored.
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	No lab audits or reviews have been completed.

Section 2 Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	- The Caladan target area including the Arrakis Prospect, resides in the exploration leases E 53/1843, E 53/2304, E 53/2192 and E 53/1882. Yandal Resources Limited wholly owns these tenements. - The tenements are in good standing, and no known impediments exist.

Criteria	JORC Code explanation	Commentary
.Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	- Previous operators who have completed exploration across the Caladan target area include Eagle Mining, Hunter Resources and Great Central Mines. Work completed by these operators included limited RAB a. The RAB drilling data is of a reasonable quality. - For historic RAB drilling completed by Eagle Mining in 1995, derived from WAMEX Report A047408, samples were taken over discrete lithological changes of varying lengths. Holes were terminated once a recognisable saprolitic horizon was intercepted. - For historic RAB drilling completed by Hunter Resources in 1995, derived from WAMEX Report A047408, samples were collected as 4m composites from the transported/residual interface to the bottom of the hole.
Geology	Deposit type, geological setting and style of mineralisation.	The Caladan target area, including the Arrakis Prospect, is assumed to host Archaean Orogenic Gold mineralisation. The prospect is located within the Yandal Greenstone Belt, a greenstone terrain of the Yilgarn Craton. Mineralisation is hosted within interpreted mafic and intermediate lithologies. The Archaean rocks are overlain by 2-20m of transported cover.
Drill hole Information	A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <i>easting and northing of the drill hole collar</i> <i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</i> <i>dip and azimuth of the hole</i> <i>down hole length and interception depth</i> <i>hole length.</i> If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	- See Tables 2 & 3. - All drilling has been reported, either within this announcement or in previous announcements. - No information is excluded.
Data aggregation methods	In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated. Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results,	- Only significant gold intercepts have been reported, meaning all intervals >0.1 g/t Au (unless otherwise stated). These intervals have been reported as a composite where the intercept includes more than one sample. Composites may include up to 2m of continuous internal waste unless otherwise stated, and the final composite grade must exceed 0.1g/t Au. - Only 1m samples were used for the reporting of significant intercepts. The first reported assay result was used for all significant intercepts reported. All intercepts have been reported relative to down-hole length. All intercepts are reported in grams per tonne (g/t). If a single composite includes a material high-grade sub-interval, this has been reported. Reported composite

Criteria	JORC Code explanation	Commentary
	<i>the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated.</i>	- intervals were calculated and reviewed by Mr Christopher Oorschot. All significant intercepts are detailed in Table 3. - No metal equivalent calculations were applied.
Relationship between mineralisation widths and intercept lengths	<i>These relationships are particularly important in the reporting of Exploration Results.</i> <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i> <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').</i>	Initial interpretations across the Caladan target area suggest stratigraphy is striking to the northwest. The dip of stratigraphy is unknown. The relationship between the geometry of mineralisation and the drilling direction is unknown. Observation from previous drilling on a single line that transects the Caladan target area suggests sub-vertical shear zones are associated with mineralisation and are striking to the northwest.
Diagrams	<i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i>	See Figures in the main body of this report and Tables 2-3.
Balanced reporting	<i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i>	All significant intercepts have been reported.
Other substantive exploration data	<i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i>	- Heritage surveys are needed before any closer spaced lines can be cleared and drilled across the Caladan target area. - Several larger drainage systems transect the Caladan target area. - Transported cover is well cemented, and a rock-breaker is needed to construct sumps to hold drilling water.

Criteria	JORC Code explanation	Commentary
Further work	<i>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</i> <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i>	• Further work across the Caladan target area and Arrakis Prospect includes: ○ Further RC drilling ○ Infill air-core drilling ○ Analysis of bottom-of-hole multi-element data once results are received, ○ Heritage surveys to clear additional lines across the Caladan target area, ○ Infill ground gravity survey subject to further drilling results. ○ Diamond drilling subject to further results.