

NEWS RELEASE

TSX: SXGC | ASX: SX2 | OTCQX: SXGCF



JANUARY 28, 2026

SOUTHERN CROSS GOLD DRILLS 559 METRES @ 2.1 g/t GOLD (UNCUT) TRAVERSING 16 VEIN SETS

Includes: 7th highest intercept on project - 1.3 m @ 670 g/t Gold

Best antimony intercept - 0.16 m @ 65.9% Sb (plus 78.5 g/t Gold)



Vancouver, Canada and Melbourne, Australia — [Southern Cross Gold Consolidated Ltd](#) (“SXGC”, “SX2” or the “Company”) (TSX:SXGC) (ASX:SX2) (OTCQX:SXGCF) (Frankfurt: MV3.F) announces results from four drillholes from the Rising Sun prospect at the 100%-owned Sunday Creek Gold-Antimony Project in Victoria (Figures 1 to 6).

SDDSC196 intersected sixteen vein sets in Rising Sun across a +500 m mineralised corridor from 376 m to 936 m downhole which averaged 559 m @ 2.5 g/t AuEq (2.1 g/t Au and 0.2% Sb) uncut. The hole returned **six intervals greater than 20 g/t AuEq**, including **three individual assays exceeding 100 g/t Au**. Highlights include **1.3 m @ 670.4 g/t AuEq (670.2 g/t Au, 0.1% Sb)** from 869.2 m – the 7th highest intercept on the project – and the highest individual antimony assay to date at **0.16 m @ 65.9% Sb (plus 78.5 g/t Au)** from 445.9 m.

The true thickness of the mineralized intervals are interpreted to be approximately 50% to 65% of the sampled thickness for other reported holes.

Five Key Takeaways:

- 559 m Mineralised Corridor Confirmed:** SDDSC196 intersected 16 vein sets across a 559 m corridor from 376 m to 936 m downhole, averaging **559 m @ 2.5 g/t AuEq (2.1 g/t Au, 0.2% Sb) uncut**, with six intervals greater than 20 g/t AuEq including three individual assays exceeding 100 g/t Au.
- Ultra High-Grade Intersection:** SDDSC196 delivers **1.3 m @ 670 g/t AuEq** (nearly 20 oz/t gold) from 869 m depth (Photos 1 and 2) – the 7th highest intercept on the project and further confirmation that ultra-high grade gold persists at depth.
- Record Antimony Grades:** The highest individual antimony assay on the project to date – **0.16 m @ 65.9% Sb (plus 78.5 g/t Au)** – reinforces Sunday Creek’s strategic importance as a Western antimony supply source.
- Infill Success Across Additional Reported Holes:** SDDSC176 returned **4.2 m @ 25.7 g/t AuEq (incl. 1.4 m @ 77 g/t AuEq)** confirming RS4 high-grade core; SDDSC187 intersected seven vein sets including three not previously defined, with **5.2 m @ 7.8 g/t AuEq (incl. 0.1 m @ 127 g/t Au)**; SDDSC190 defined the outer margins of the Rising Sun system.
- Momentum Building:** Ten rigs operational with 39 holes pending results. Sunday Creek now contains 95 composite intersections exceeding 100 g/t AuEq from 239 drill holes, underscoring the high-grade potential of this deposit.

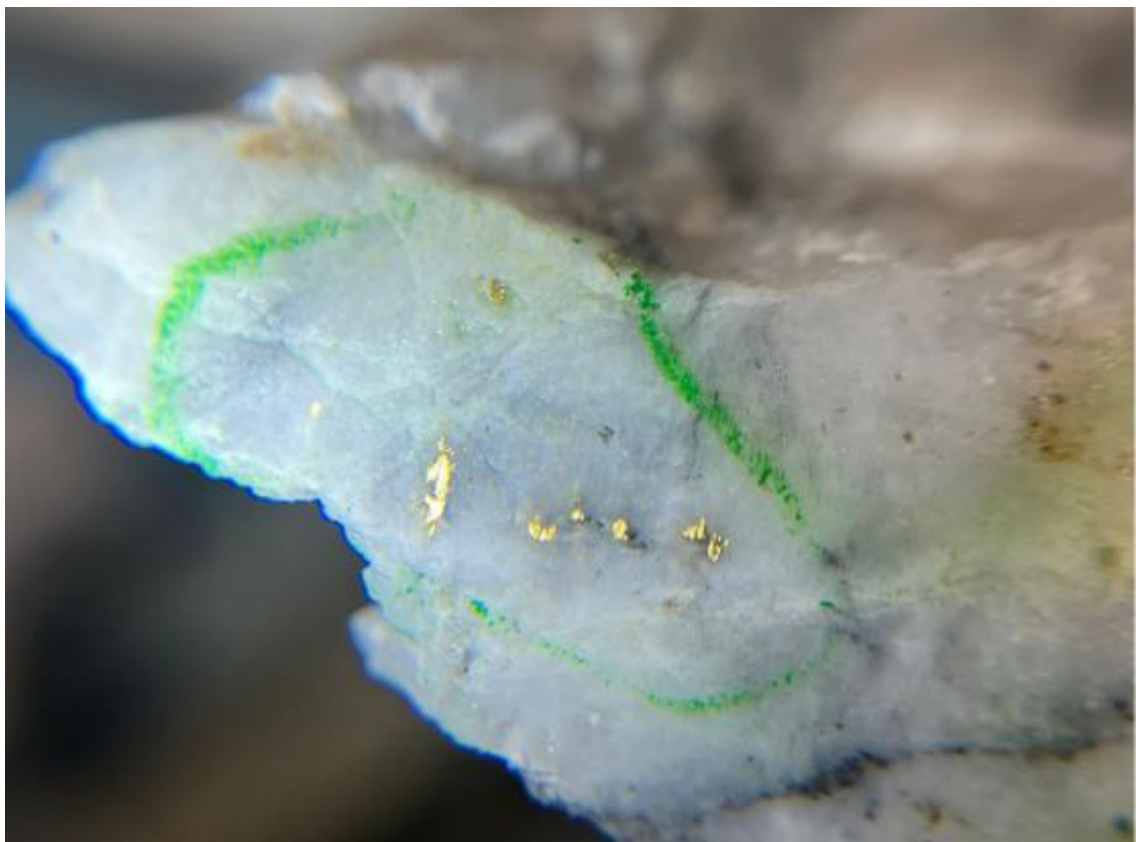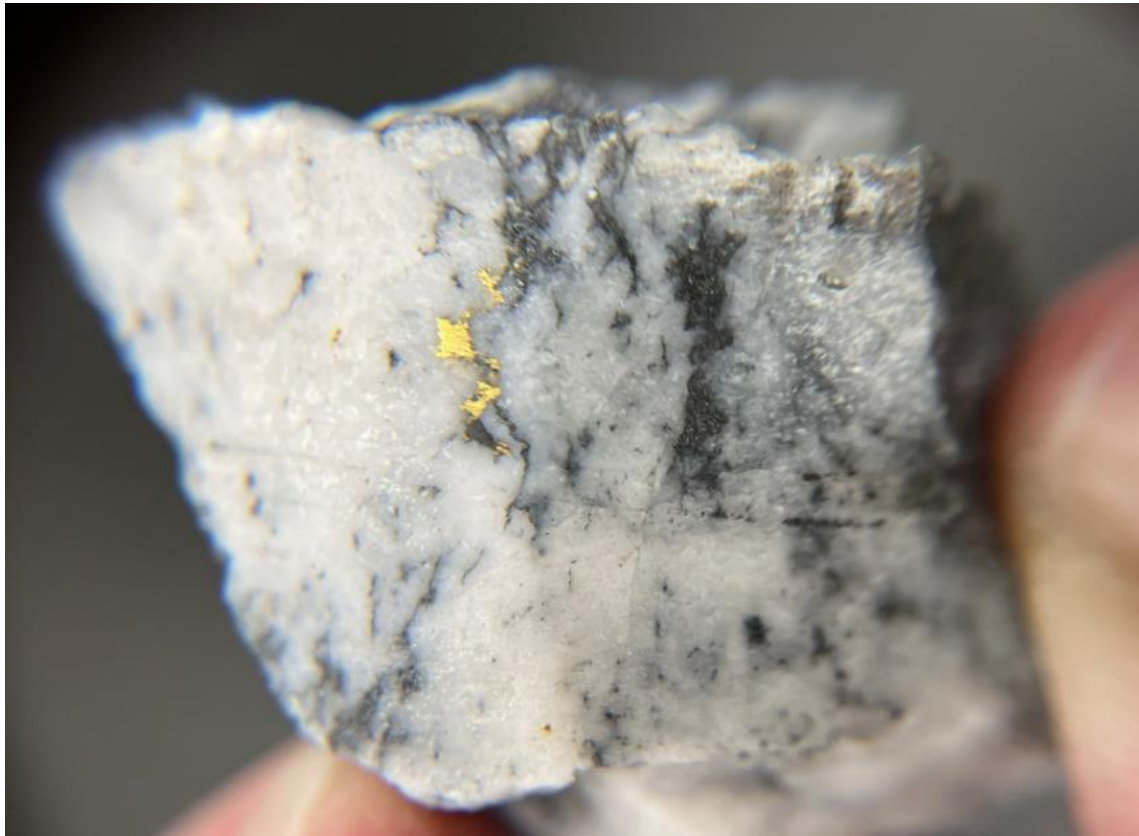

Photos 1 and 2: Visible gold in SDDSC196 in quartz + carbonate +/- stibnite veining from 869.19 m (978 g/t Au, 0.06% Sb). Field of view 2 cm in both images.

Michael Hudson, President & CEO states: *"This hole is a statement of deposit quality. A 559 m mineralized corridor averaging 2.5 g/t AuEq (uncut) — punctuated by ultra-high grades including nearly 20 ounces per tonne gold — is exactly what we hoped to see as we infill the Rising Sun system. **What this means: we're confirming not just grade, but the scale and continuity required to underpin a meaningful resource.***

*"What makes these results particularly compelling is predictability. We infilled at 15-30 m spacing, hit where we expected to hit, and discovered four new vein sets in the process. **What this means: the system is behaving consistently, and it remains open.** We're not chasing isolated high-grade shoots; we're defining a coherent, stacked vein system — one of five mineralized areas hosting 95 vein sets collectively.*

*"The highest individual antimony assay on the project to date — 0.16 m @ 65.9% Sb (plus 78.5 g/t Au) — arrives as antimony prices have tripled since China's export restrictions, with no Western supply response yet in sight. **What this means: Sunday Creek's strategic value is sharpening at exactly the right time.***

"With ten rigs operating and 39 holes awaiting assays, we are systematically converting exploration potential into the drill density required for resource definition."

For Those Who Like the Details - Highlights:

- **SDDSC196** the standout hole traversed 559 m of mineralization (376 m to 936 m) grading 2.5 g/t AuEq (2.1 g/t Au, 0.18% Sb) – exceptional by global standards. Highlights included:
 - **559.2 m @ 2.5 g/t AuEq** (2.1 g/t Au and 0.2% Sb) from 376.4 m (uncut) including:
 - **3.8 m @ 30.3 g/t AuEq** (9.6 g/t Au, 8.7% Sb) from 376.4 m – *strong width with grade (Figure 6)*
 - **0.4 m @ 113.7 g/t AuEq** (2.1 g/t Au, 46.7% Sb) from 384.4 m – *antimony-dominant high-grade*
 - **1.3 m @ 54.5 g/t AuEq** (26.6 g/t Au, 11.6% Sb) from 445.7 m – *includes record 0.16 m @ 65.9% Sb*
 - **0.3 m @ 219.1 g/t AuEq** (84.1 g/t Au, 56.5% Sb) from 528.7 m – *exceptional antimony grade*
 - **1.3 m @ 670.4 g/t AuEq** (670.2 g/t Au, 0.1% Sb) from 869.2 m – *7th highest intercept on project; includes 0.9 m @ 978 g/t Au*
 - **1.0 m @ 24.7 g/t AuEq** (24.7 g/t Au) from 930.5 m – *mineralization continues to depth*
- **SDDSC176 – High-Grade Confirmation:**
 - **4.2 m @ 25.7 g/t AuEq** (15.6 g/t Au, 4.2% Sb) from 521.2 m *including:*
 - **1.4 m @ 77.0 g/t AuEq;** *confirms RS4 high-grade core*
- **SDDSC187 – Footprint Expansion:**
 - **5.2 m @ 7.8 g/t AuEq** (5.8 g/t Au, 0.8% Sb) from 292.7 m – *incl. 0.1 m @ 126.7 g/t AuEq; three new vein sets identified*
 - **0.4 m @ 57.5 g/t AuEq** (24.0 g/t Au, 14.0% Sb) from 433.6 m – *high-grade Au-Sb shoot*

Drill Hole Discussion

Four drill holes are reported here that targeted the Rising Sun prospect from both east to west and west to east orientations.

SDDSC196

SDDSC196, drilled west to east, intersected sixteen vein sets in Rising Sun, including seven high-grade mineralized zones, four of which had not been defined before this drillhole. The hole delivered exceptional individual assays, with 3 individual results >100 g/t Au including a standout **0.9 m @ 978 g/t Au** (0.1% Sb) from 869.2 m, **0.21 m @ 144 g/t Au** from 459.0 m, and **0.19 m @ 127 g/t Au (46.3% Sb)** from 379.74 m, alongside high-grade antimony individual assays >40% Sb with a project record of the highest individual antimony result on the project to date **0.16 m @ 65.9% Sb** (78.5 g/t Au) from 445.9 m, **0.28 m @ 56.5% Sb** (84.1 g/t Au) from 528.7 m, **0.23 m @ 54.7% Sb** (20.3 g/t Au) from 379.5 m, and **0.42 m @ 46.7% Sb** (2.1 g/t Au) from 384.4 m.

The drillhole successfully infilled between 15 m to 30 m up and downdip spacing (Figure 6) and delivered a standout intersection of **1.3 m @ 670.4 g/t AuEq** (670.2 g/t Au, 0.1% Sb) from 869.2 m, the **7th best intersection on the project to date** and a 36 m downdip extension of RS90. Four previously unrecognized vein sets were identified, and the hole also achieved a 39 m downdip extension of RS100, demonstrating continued mineralization at depth.

Selected highlights include:

- **3.8 m @ 30.3 g/t AuEq** (9.6 g/t Au, 8.7% Sb) from 376.4 m, including;
 - **1.2 m @ 90.0 g/t AuEq** (27.1 g/t Au, 26.3% Sb) from 378.7 m
- **0.4 m @ 113.7 g/t AuEq** (2.1 g/t Au, 46.7% Sb) from 384.4 m
- **1.3 m @ 54.5 g/t AuEq** (26.6 g/t Au, 11.6% Sb) from 445.7 m
- **0.6 m @ 51.2 g/t AuEq** (51.1 g/t Au, 0.0% Sb) from 459.0 m, including;
 - **0.2 m @ 144.0 g/t AuEq** (144.0 g/t Au, 0.0% Sb) from 459.0 m
- **4.8 m @ 3.2 g/t AuEq** (2.9 g/t Au, 0.1% Sb) from 479.5 m
- **0.3 m @ 219.1 g/t AuEq** (84.1 g/t Au, 56.5% Sb) from 528.7 m
- **5.7 m @ 2.3 g/t AuEq** (2.1 g/t Au, 0.1% Sb) from 659.7 m
- **1.9 m @ 8.4 g/t AuEq** (8.4 g/t Au, 0.0% Sb) from 847.4 m, including;
 - **0.9 m @ 16.7 g/t AuEq** (16.7 g/t Au, 0.0% Sb) from 847.4 m
- **1.3 m @ 670.4 g/t AuEq** (670.2 g/t Au, 0.1% Sb) from 869.2 m
- **2.5 m @ 7.4 g/t AuEq** (7.3 g/t Au, 0.0% Sb) from 885.1 m, including;
 - **0.4 m @ 42.1 g/t AuEq** (41.9 g/t Au, 0.1% Sb) from 885.1 m
- **1.0 m @ 24.7 g/t AuEq** (24.7 g/t Au, 0.0% Sb) from 930.5 m, including;
 - **0.3 m @ 85.8 g/t AuEq** (85.8 g/t Au, 0.0% Sb) from 930.5 m

SDDSC176

SDDSC176, drilled east to west, intersected three vein sets in Rising Sun, including the confirmation of a high-grade core (30 m up-dip and downdip infill on RS 4). The hole delivered exceptional individual assays, with 1 individual result >100 g/t Au with **0.24 m @ 114 g/t Au** (6.4% Sb) from 524.66 m, alongside a high-grade antimony individual assay >30% Sb of **0.36 m @ 31.6% Sb** (54 g/t Au) from 523.97 m.

Selected highlights include:

- **2.4 m @ 9.8 g/t AuEq** (7.3 g/t Au, 1.0% Sb) from 516.7 m, including;

- **0.6 m @ 36.0 g/t AuEq** (27.5 g/t Au, 3.6% Sb) from 516.7 m
- **4.2 m @ 25.7 g/t AuEq** (15.6 g/t Au, 4.2% Sb) from 521.2 m, including;
 - **1.4 m @ 77.0 g/t AuEq** (46.4 g/t Au, 12.8% Sb) from 524.0 m

SDDSC176 demonstrated the presence of exceptional antimony-gold mineralization within Rising Sun, with individual assays confirming the high-grade nature of the system.

SDDSC187

SDDSC187, drilled west to east, intersected seven vein sets in Rising Sun, including three vein sets not previously defined, expanding the known extent of the mineralized system. The hole identified a high-grade core and delivered outstanding individual assays, including a result **>100 g/t Au** with **0.11 m @ 122 g/t Au** (1.98% Sb) from 297.71 m and a high-grade antimony intercept **>30% Sb** with **0.15 m @ 40.3% Sb** (57.8 g/t Au) from 433.56 m.

Selected highlights include:

- **5.2 m @ 7.8 g/t AuEq** (5.8 g/t Au, 0.8% Sb) from 292.7 m, including;
 - **1.5 m @ 14.8 g/t AuEq** (9.6 g/t Au, 2.2% Sb) from 292.7 m
 - **0.1 m @ 126.7 g/t AuEq** (122.0 g/t Au, 2.0% Sb) from 297.7 m
- **2.3 m @ 9.1 g/t AuEq** (7.0 g/t Au, 0.9% Sb) from 307.0 m, including;
 - **0.3 m @ 58.1 g/t AuEq** (44.5 g/t Au, 5.7% Sb) from 309.0 m
- **2.2 m @ 13.1 g/t AuEq** (9.6 g/t Au, 1.5% Sb) from 315.3 m, including;
 - **0.6 m @ 40.8 g/t AuEq** (30.0 g/t Au, 4.5% Sb) from 316.4 m
- **6.6 m @ 4.8 g/t AuEq** (1.4 g/t Au, 1.4% Sb) from 322.8 m, including;
 - **0.6 m @ 25.5 g/t AuEq** (3.0 g/t Au, 9.4% Sb) from 328.5 m
- **0.4 m @ 57.5 g/t AuEq** (24.0 g/t Au, 14.0% Sb) from 433.6 m, including;
- **8.6 m @ 2.7 g/t AuEq** (2.5 g/t Au, 0.1% Sb) from 476.4 m, including;
 - **1.2 m @ 9.7 g/t AuEq** (9.6 g/t Au, 0.0% Sb) from 476.4 m

SDDSC187 successfully extended the Rising Sun mineralized footprint by intersecting three previously undefined vein sets, while confirming continuation of high-grade gold-antimony mineralization.

SDDSC190

SDDSC190, drilled west to east, intersected three vein sets on the peripheries of the Rising Sun structure, including one vein set not previously defined. This hole contributed to defining the outer margins of the mineralized system and provided important geological information regarding the peripheral extent of the Rising Sun system, contributing to the overall understanding of the mineralized envelope.

Selected highlights include:

- **8.0 m @ 1.3 g/t AuEq** (1.3 g/t Au, 0.0% Sb) from 227.0 m

Pending Results and Update

Nine drill rigs are currently operational on the Sunday Creek project with one additional drill rig dedicated to regional exploration. Results are pending from 39 holes currently being processed and analyzed including ten holes that are actively being drilled and two abandoned holes (Figure 2). The Company continues its ongoing 200,000 m drill program through to Q1 2027.

AME Roundup 2026 – Vancouver

Southern Cross Gold will be presenting and exhibiting at AME Roundup 2026 in Vancouver this week. Head

of Exploration Kenneth Bush will present in the Precious Metals Session on **Wednesday, January 28 at 10:05am**, covering the latest thoughts and results from the Sunday Creek Gold-Antimony Project

Also visit us at Coreshack Booth 926 on Wednesday and Thursday (January 28-29) at AME Roundup 2026 to meet Kenneth and Exploration Manager Tyler Lamb – and see some of Sunday Creek's high-grade gold core for yourself. Full schedule at www.roundup.amebc.ca/schedule.

About Sunday Creek

The Sunday Creek epizonal-style gold project is located 60 km north of Melbourne within 16,900 hectares ("Ha") of granted exploration tenements. SXGC is also the freehold landholder of 1,392 Ha that forms the key portion in and around the main drilled area at the Sunday Creek Project.

Gold and antimony form in a relay of vein sets that cut across a steeply dipping zone of intensely altered rocks (the "host"). These vein sets are like a "Golden Ladder" structure where the main host extends between the side rails deep into the earth, with multiple cross-cutting vein sets that host the gold forming the rungs. At Apollo and Rising Sun these individual 'rungs' have been defined over 600 m depth extent from surface to over 1,100 m below surface, are 2.5 m to 3.5 m wide (median widths) (and up to 10 m), and 20 m to 100 m in strike.

Cumulatively, 239 drill holes for 110,332.94 m have been reported from Sunday Creek since late 2020. This amount includes five holes for 929 m that have been drilled for geotechnical purposes and 22 holes for 2,973.77 m that were abandoned due to deviation or hole conditions. Fourteen drillholes for 2,383 m have been reported regionally outside of the main Sunday Creek drill area with three additional regional holes currently being processed. A total of 64 historic drill holes for 5,599 m were completed from the late 1960s to 2008. **The project now contains a total of 95 composite intersections exceeding 100 g/t AuEq and 107 composite intersections between 50-100 g/t AuEq** by applying a 1 m (down hole length) @ 5 g/t AuEq lower cut.

Southern Cross Gold's systematic drill program is strategically targeting these significant vein formations, which are currently defined over 1,350 m strike of the host dyke/sediment ("rails of the ladder") from Christina to Apollo prospects, of which approximately 620 m has been more intensively drill tested (Rising Sun to Apollo). At least 95 'rungs' have been defined to date, defined by high-grade intercepts (20 g/t Au to >7,330 g/t Au) along with lower grade edges. Ongoing step-out drilling is aiming to uncover the potential extent of this mineralized system (Figure 5).

Geologically, the project is located within the Melbourne Structural Zone in the Lachlan Fold Belt. The regional host to the Sunday Creek mineralization is an interbedded turbidite sequence of siltstones and minor sandstones metamorphosed to sub-greenschist facies and folded into a set of open north-west trending folds.

Further Information

Further discussion and analysis of the Sunday Creek project is available through the interactive Vrifly 3D animations, presentations and videos all available on the SXGC website. These data, along with an interview on these results with President & CEO/Managing Director Michael Hudson can be viewed at www.southerncrossgold.com.

No upper gold grade cut is applied in the averaging and intervals are reported as drill thickness. However, during future Mineral Resource studies, the requirement for assay top cutting will be assessed. The Company notes that due to rounding of assay results to one significant figure, minor variations in calculated composite grades may occur.

Figures 1 to 6 show project location, plan and longitudinal views of drill results reported here and Tables 1 to 3 provide collar and assay data. The true thickness of the mineralized intervals are reported individually as estimated true widths ("ETW"), otherwise they are interpreted to be approximately 50% to 65% of the sampled thickness for other reported holes. Lower grades were cut at 1.0 g/t AuEq lower cutoff over a maximum width of 2 m with higher grades cut at 5.0 g/t AuEq lower cutoff over a maximum of 1 m width.

Critical Metal Epizonal Gold-Antimony Deposits

Sunday Creek (Figure 5) is an epizonal gold-antimony deposit formed in the late Devonian (like Fosterville, Costerfield and Redcastle), 60 million years later than mesozonal gold systems formed in Victoria (for example Ballarat and Bendigo). Epizonal deposits are a form of orogenic gold deposit classified according to their depth of formation: epizonal (<6 km), mesozonal (6 km to 12 km) and hypozonal (>12 km).

Epizonal deposits in Victoria often have associated high levels of the critical metal, antimony, and Sunday Creek is no exception. China claims a 56 per cent share of global mined supplies of antimony, according to a 2023 European Union study. Antimony features highly on the critical minerals lists of many countries including Australia, the United States of America, Canada, Japan and the European Union. Australia ranks seventh for antimony production despite all production coming from a single mine at Costerfield in Victoria, located nearby to all SXGC projects. Antimony alloys with lead and tin which results in improved properties for solders, munitions, bearings and batteries. Antimony is a prominent additive for halogen-containing flame retardants. Adequate supplies of antimony are critical to the world's energy transition, and to the high-tech industry, especially the semi-conductor and defence sectors where it is a critical additive to primers in munitions.

In August 2024, the Chinese government announced it will place export limits from September 15, 2024 on antimony and antimony products. This puts pressure on Western defence supply chains and negatively affect the supply of the metal and push up pricing given China's dominance of the supply of the metal in the global markets. This is positive for SXGC as we are likely to have one of the very few large and high-quality projects of antimony in the western world that can feed western demand into the future.

Antimony represents approximately 21% to 24% in situ recoverable value of Sunday Creek at an AuEq of 2.39 ratio.

About Southern Cross Gold Consolidated Limited (TSX: SXGC) (ASX: SX2) (OTCQX: SXGCF) (Frankfurt: MV3.F)

Southern Cross Gold Consolidated Ltd. (TSX: SXGC, ASX: SX2, OTCQX: SXGCF), is building Australia's most significant gold-antimony project at the Sunday Creek Gold-Antimony Project, located 60 km north of Melbourne. Sunday Creek has emerged as one of the Western world's most significant gold and antimony discoveries, with exceptional drilling results including 95 composite intersections exceeding 100 g/t AuEq from 115.9 km of drilling (including historic drilling). The mineralization follows a "Golden Ladder" structure over 12 km of strike length, with confirmed continuity from surface to 1,100 m depth.

Sunday Creek's strategic value is enhanced by its dual-metal profile. The Company is building a significant project – and in doing so, securing a critical mineral the Western world needs. With antimony contributing approximately 20% of in-situ value alongside gold, Sunday Creek can be developed primarily based on gold economics, which reduces antimony-related risks while maintaining strategic supply optionality. This has gained increased significance following China's export restrictions on antimony, a critical metal for defence and semiconductor applications. Southern Cross' inclusion in the US Defense Industrial Base Consortium (DIBC) and Australia's AUKUS-related legislative changes position it as a potential key Western antimony supplier.

Technical fundamentals further strengthen the investment case, with preliminary metallurgical work showing non-refractory mineralization suitable for conventional processing and gold recoveries of 93% to 98% through gravity and flotation.

With a strong cash position, 1,392 Ha of strategic freehold land ownership, and a large 200 km drill program planned through Q1 2027, SXGC is well-positioned to advance this globally significant gold-antimony discovery in a tier-one jurisdiction, delivering milestone by milestone.

- Ends -

This announcement has been approved for release by the Board of Southern Cross Gold Consolidated Ltd.

For further information, please contact:

Mariana Bermudez – Corporate Secretary

mb@southerncrossgold.com or +1 604 685 9316

Executive Office

1305 – 1090 West Georgia Street Vancouver, BC, V6E 3V7, Canada

Nicholas Mead – Corporate Development

info@southerncrossgold.com.au or +61 415 153 122

Justin Mouchacca, Assistant Company Secretary,

jm@southerncrossgold.com.au or +61 3 8630 3321

Subsidiary Office

Level 21, 459 Collins Street, Melbourne, VIC, 3000, Australia

NI 43-101 Technical Background and Qualified Person

Michael Hudson, President, CEO and Managing Director of SXGC, and a Fellow of the Australasian Institute of Mining and Metallurgy, and Mr Kenneth Bush, Head of Exploration of SXGC and a RPGeo (10315) of the Australian Institute of Geoscientists, are the Qualified Persons as defined by the NI 43-101. They have prepared, reviewed, verified and approved the technical contents of this release.

Analytical samples are transported to the Bendigo facility of On Site Laboratory Services (“On Site”) which operates under both an ISO 9001 and NATA quality systems. Samples were prepared and analyzed for gold using the fire assay technique (PE01S method; 25 gram charge), followed by measuring the gold in solution with flame AAS equipment. Samples for multi-element analysis (BM011 and over-range methods as required) use aqua regia digestion and ICP-MS analysis. The QA/QC program of Southern Cross Gold consists of the systematic insertion of certified standards of known gold content, blanks within interpreted mineralized rock and quarter core duplicates. In addition, On Site inserts blanks and standards into the analytical process.

SXGC considers that both gold and antimony that are included in the gold equivalent calculation (“AuEq”) have reasonable potential to be recovered and sold at Sunday Creek, given current geochemical understanding, historic production statistics and geologically analogous mining operations. Historically, ore from Sunday Creek was treated onsite or shipped to the Costerfield mine, located 54 km to the northwest of the project, for processing during WW1. The Costerfield mine corridor, now owned by Alkane Resources (previously Mandalay Resources) contains two million ounces of equivalent gold (Mandalay Resources Q3 2021 Results), and in 2020 was the sixth highest-grade global underground mine and a top 5 global producer of antimony.

SXGC considers that it is appropriate to adopt the same gold equivalent variables as Mandalay Resources Ltd in its 2024 End of Year Mineral Reserves and Resources Press Release, dated February 20, 2025. The gold equivalence formula used by Mandalay Resources was calculated using Costerfield’s 2024 production costs, using a gold price of US\$2,500 per ounce, an antimony price of US\$19,000 per tonne and 2024 total year metal recoveries of 91% for gold and 92% for antimony, and is as follows:

$$AuEq = Au \text{ (g/t)} + 2.39 \times Sb \text{ (\%)}$$

Based on the latest Costerfield calculation and given the similar geological styles and historic toll treatment of Sunday Creek mineralization at Costerfield, SXGC considers that a $AuEq = Au \text{ (g/t)} + 2.39 \times Sb \text{ (\%)}$ is appropriate to use for the initial exploration targeting of gold-antimony mineralization at Sunday Creek.

JORC Competent Person Statement

Information in this announcement that relates to new exploration results contained in this report is based on information compiled by Mr Kenneth Bush and Mr Michael Hudson. Mr Bush is a Member of Australian Institute of Geoscientists and a Registered Professional Geologist in the field of Mining (#10315) and Mr Hudson is a Fellow of The Australasian Institute of Mining and Metallurgy. Mr Bush and Mr Hudson each have sufficient experience relevant to the style of mineralization and type of deposit under consideration, and to the activities undertaken, to qualify as a Competent Person as defined in the 2012 Edition of the Joint Ore Reserves Committee (JORC) Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. Mr Bush is Head of Exploration and Mr Hudson is President, CEO and Managing Director of Southern Cross Gold Consolidated Limited and both consent to the inclusion in the report of the matters based on their information in the form and context in which it appears.

Certain information in this announcement that relates to prior exploration results is extracted from the Independent Geologist’s Report dated 11 December 2024 which was issued with the consent of the Competent Person, Mr Steven Tambanis. The report is included the Company’s prospectus dated 11 December 2024 and is available at www.asx.com.au under code “SX2”. The Company confirms that it is not aware of any new information or data that materially affects the information related to exploration results included in the original market announcement. The Company confirms that the form and context of the Competent Persons’ findings in relation to the report have not been materially modified from the original market announcement.

Certain information in this announcement also relates to prior drill hole exploration results, are extracted from the following announcements, which are available to view on www.southerncrossgold.com:

- 4 October, 2022 [SDDSC046](#), 20 October, 2022 [SDDSC049](#), 5 September, 2023 [SDDSC077B](#), 12 October, 2023 [SDDL003 & 4](#), 23 October, 2023 [SDDSC082](#), 9 November, 2023 [SDDSC091](#), 14 December, 2023 [SDDSC092](#), 5 March, 2024 [SDDSC107](#), 30 May, 2024 [SDDSC117](#), 13 June, 2024 [SDDSC118](#), 5 September, 2024 [SDDSC130](#), 28 October, 2024 [SDDSC137W2](#), 28 November, 2024 [SDDSC141](#), 9 December, 2024 [SDDSC145](#), 18 December, 2024 [SDDSC129 & 144](#), 28 May, 2025 [SDDSC161](#), 16 June, 2025 [SDDSC162](#), 26 August, 2025 [SDDSC171](#), 8 September, 2025 [SDDSC170A](#),

The Company confirms that it is not aware of any new information or data that materially affects the information included in the original document/announcement and the Company confirms that the form and context in which the Competent Person's findings are presented have not materially modified from the original market announcement.

Forward-Looking Statement

This news release contains forward-looking statements. Forward-looking statements involve known and unknown risks, uncertainties and assumptions and accordingly, actual results and future events could differ materially from those expressed or implied in such statements. You are hence cautioned not to place undue reliance on forward-looking statements. All statements other than statements of present or historical fact are forward-looking statements. Forward-looking statements include words or expressions such as "proposed", "will", "subject to", "near future", "in the event", "would", "expect", "prepared to" and other similar words or expressions. Factors that could cause future results or events to differ materially from current expectations expressed or implied by the forward-looking statements include general business, economic, competitive, political, social uncertainties; the state of capital markets, unforeseen events, developments, or factors causing any of the expectations, assumptions, and other factors ultimately being inaccurate or irrelevant; and other risks described in the Company's documents filed with Canadian or Australian (under code SX2) securities regulatory authorities. You can find further information with respect to these and other risks in filings made by the Company with the securities regulatory authorities in Canada or Australia (under code SX2), as applicable, and available for the Company in Canada at www.sedarplus.ca or in Australia at www.asx.com.au (under code SX2). Documents are also available at www.southerncrossgold.com. The Company disclaims any obligation to update or revise these forward-looking statements, except as required by applicable law.

Figure 1: Sunday Creek plan view showing selected results from holes SDDSC176, SDDSC187, SDDSC190 and SDDSC196 reported here (dark blue highlighted box, black trace), with selected prior reported drill holes.

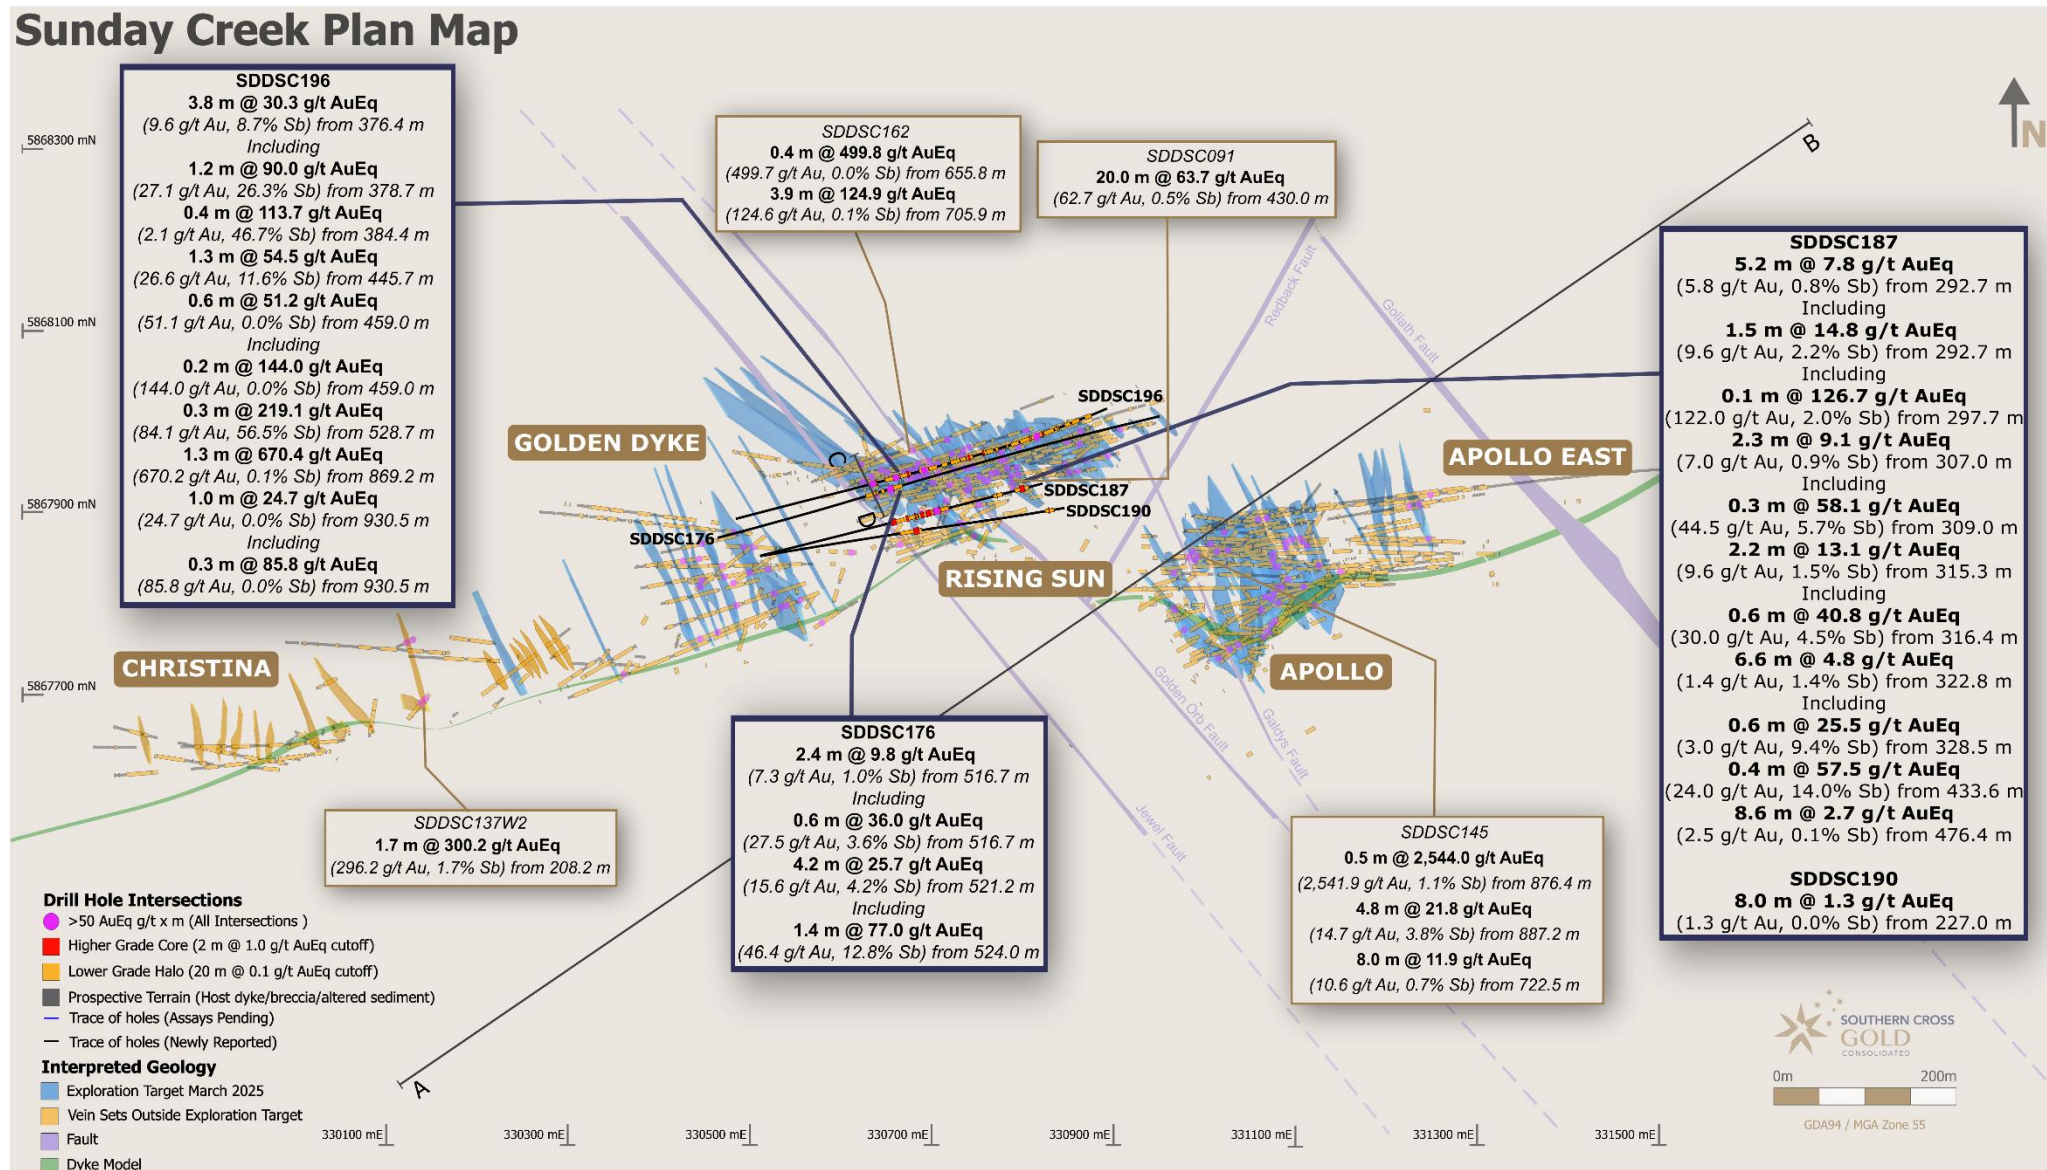


Figure 2: Sunday Creek plan view showing selected drillhole traces from holes SDDSC176, SDDSC187, SDDSC190 and SDDSC196 reported here (black trace), with prior reported drill holes (grey trace) and currently drilling and assays pending hole traces (dark blue).

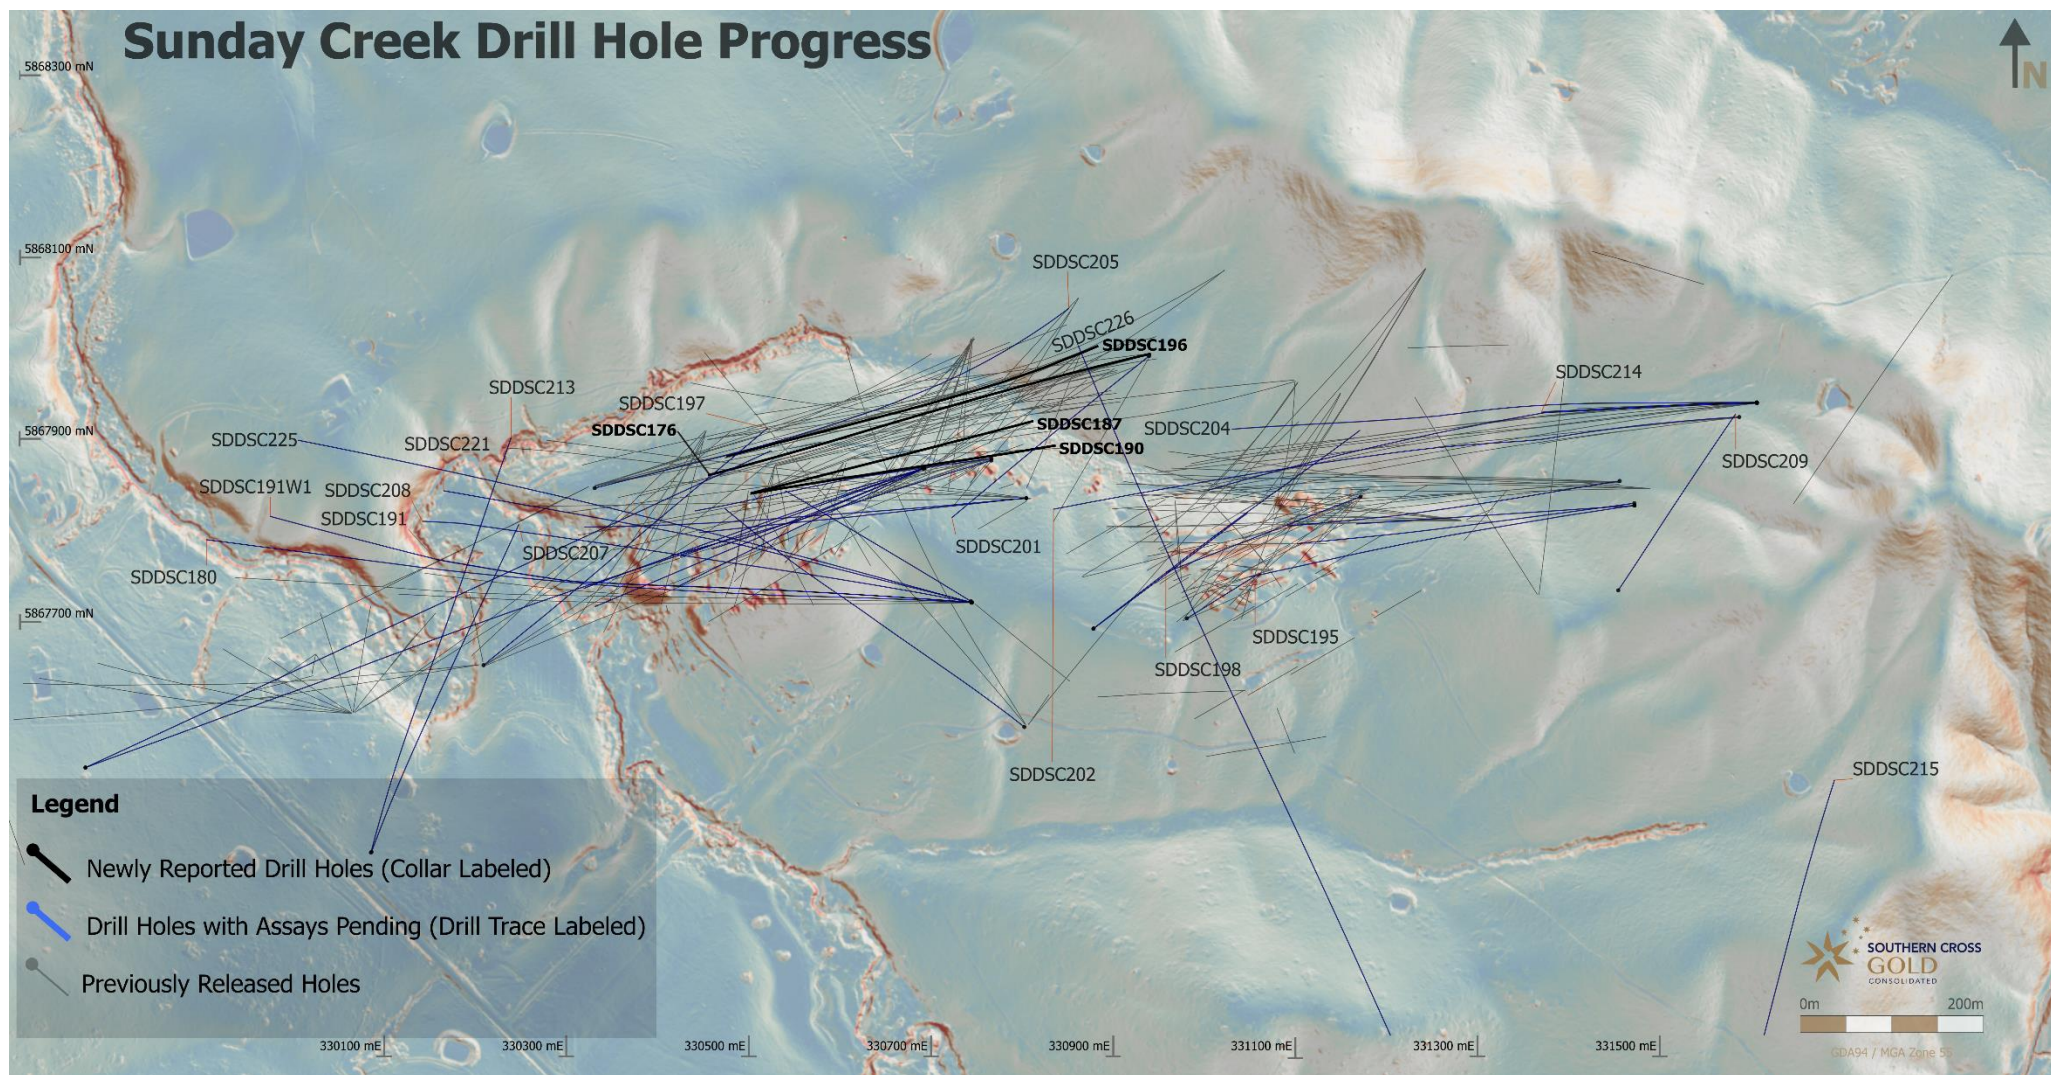


Figure 3: Sunday Creek longitudinal section across A-B in the plane of the dyke breccia/alterd sediment host looking towards the NW (striking 56 degrees) indicating mineralized vein sets. Showing holes SDDSC176, SDDSC187, SDDSC190 and SDDSC196 reported here (dark blue highlighted box, black trace), with selected intersections and prior reported drill holes. The vertical extents of the vein sets are limited by proximity to drill hole pierce points.

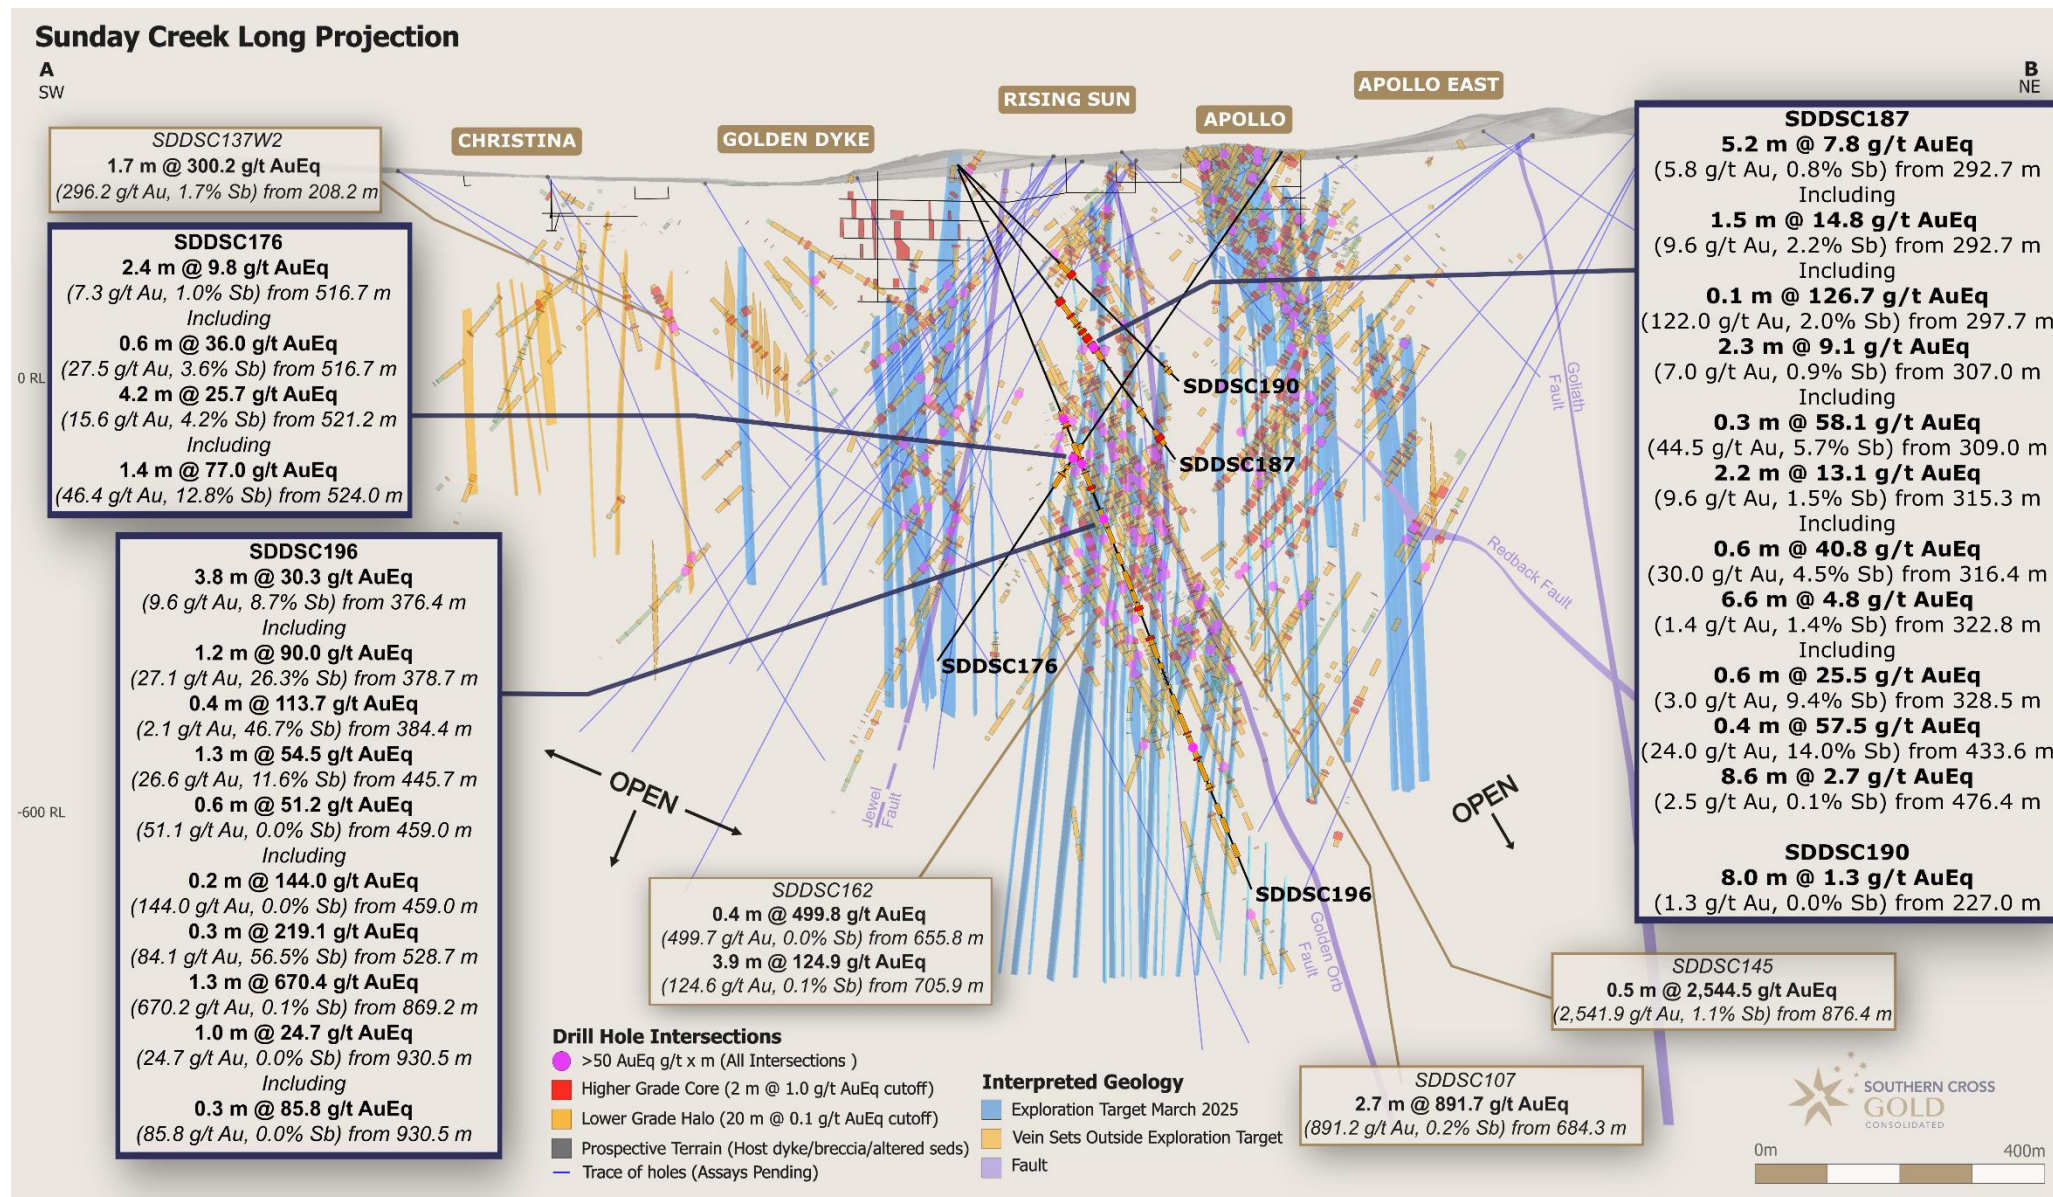


Figure 4: Sunday Creek regional plan view showing soil sampling, structural framework, regional historic epizonal gold mining areas and broad regional areas tested by 12 holes for 2,383 m drill program. The regional drill areas are at Tonstal, Consols and Leviathan located 4,000-7,500 m along strike from the main drill area at Golden Dyke- Apollo. Map in GDA94/ MGA Zone 55.

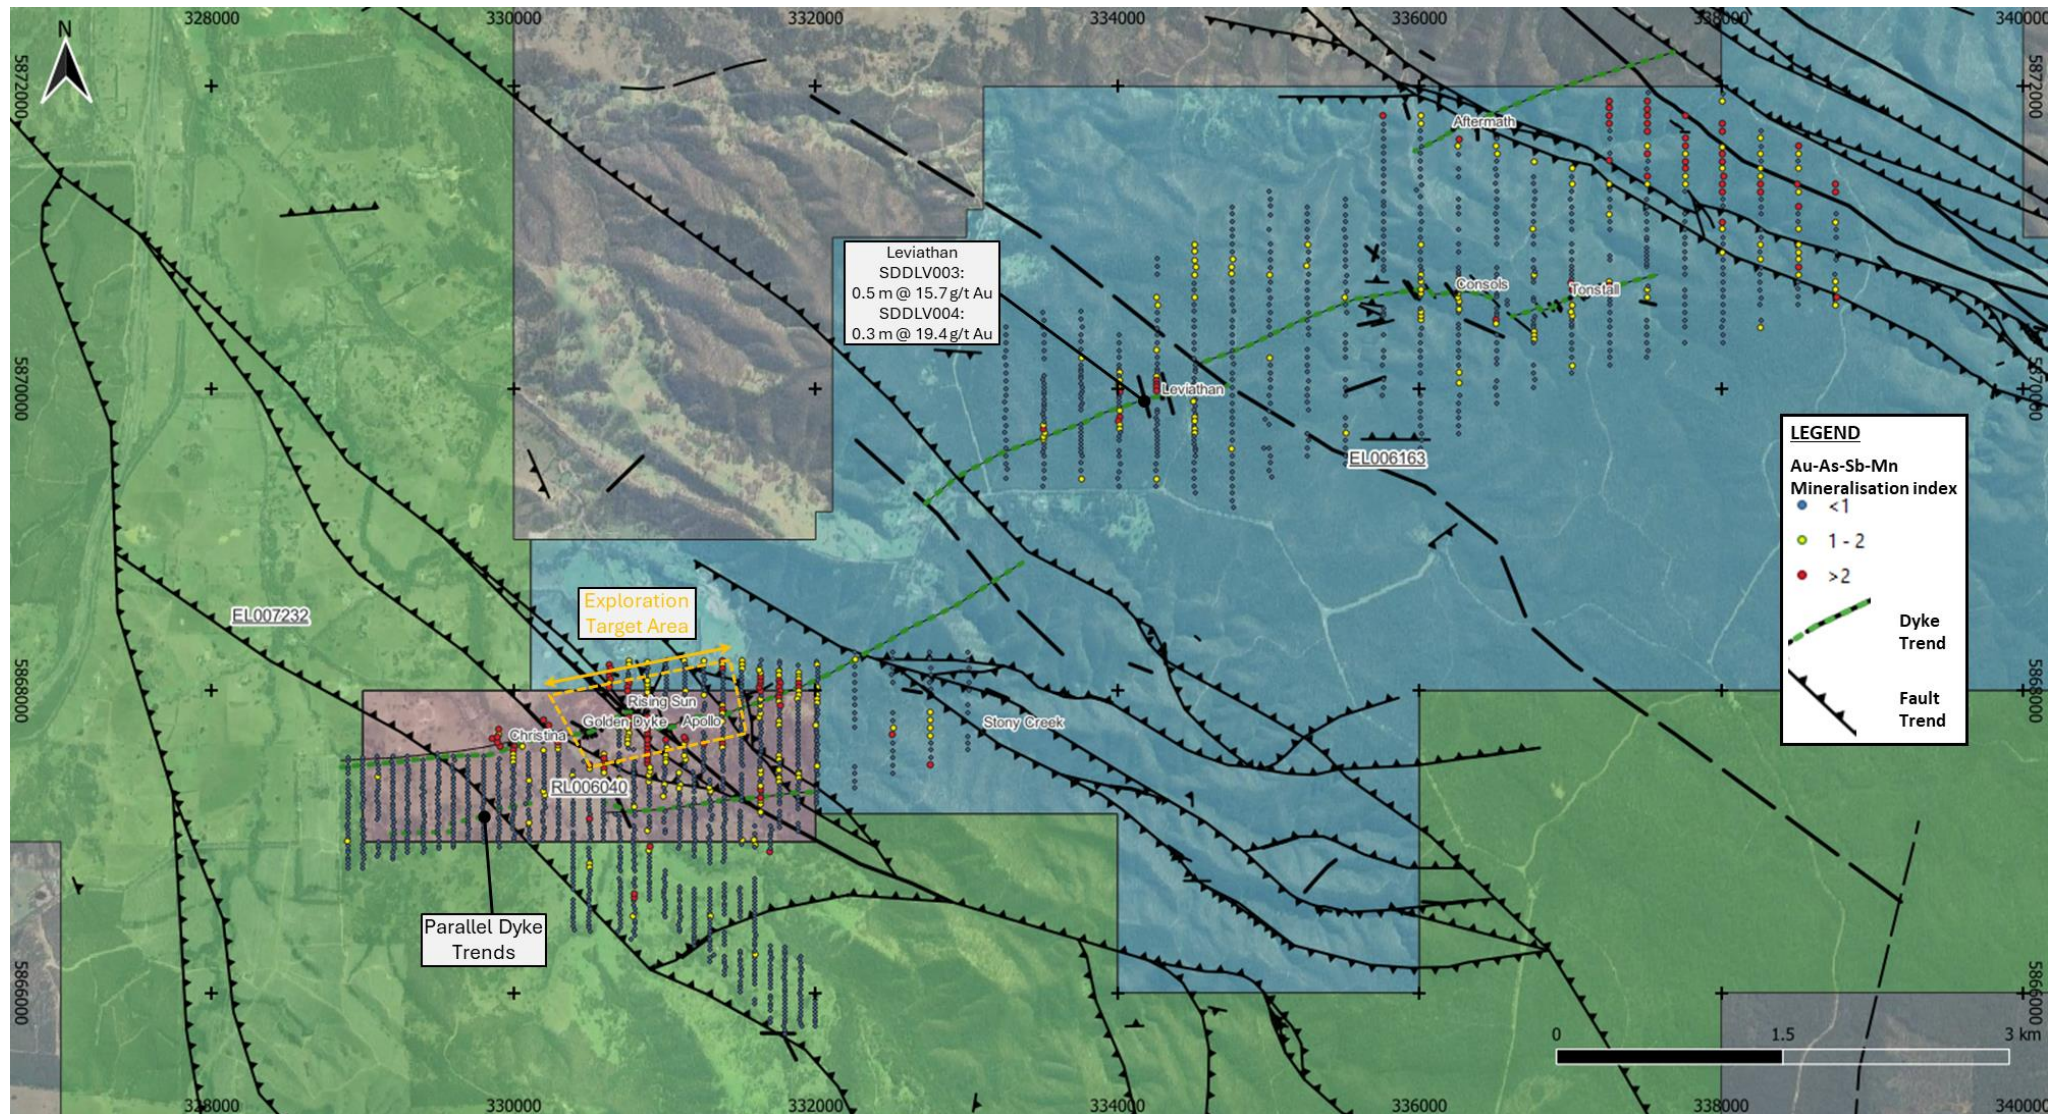


Figure 5: Location of the Sunday Creek project, along with the 100% owned Redcastle Gold-Antimony Project


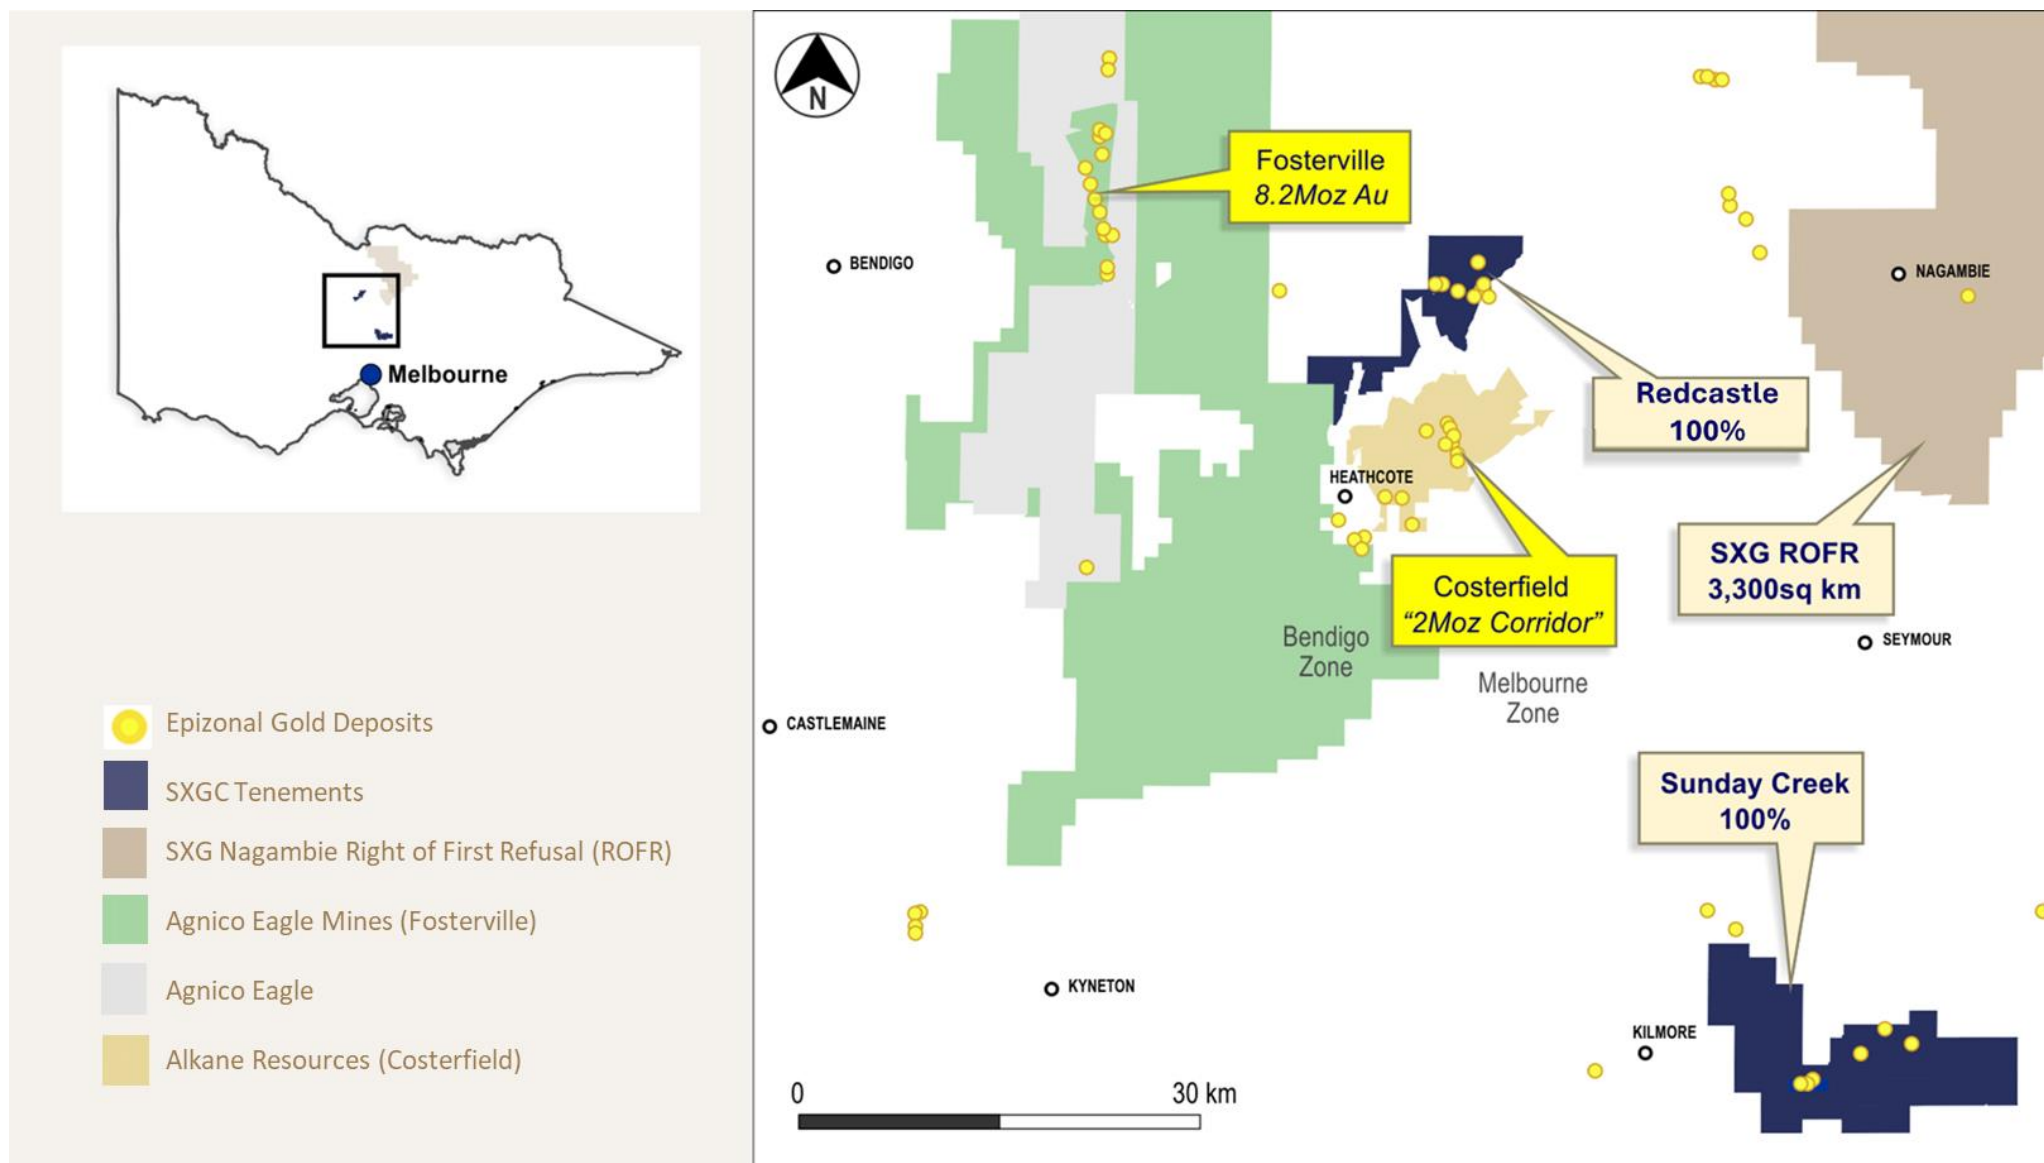


Figure 6: Sunday Creek longitudinal section across C-D in the plane of the dyke breccia/alterd sediment host looking towards the East (striking 346 degrees) indicating mineralized vein set RS01.

Sunday Creek : Rising Sun Vein Set 90 (Looking East)

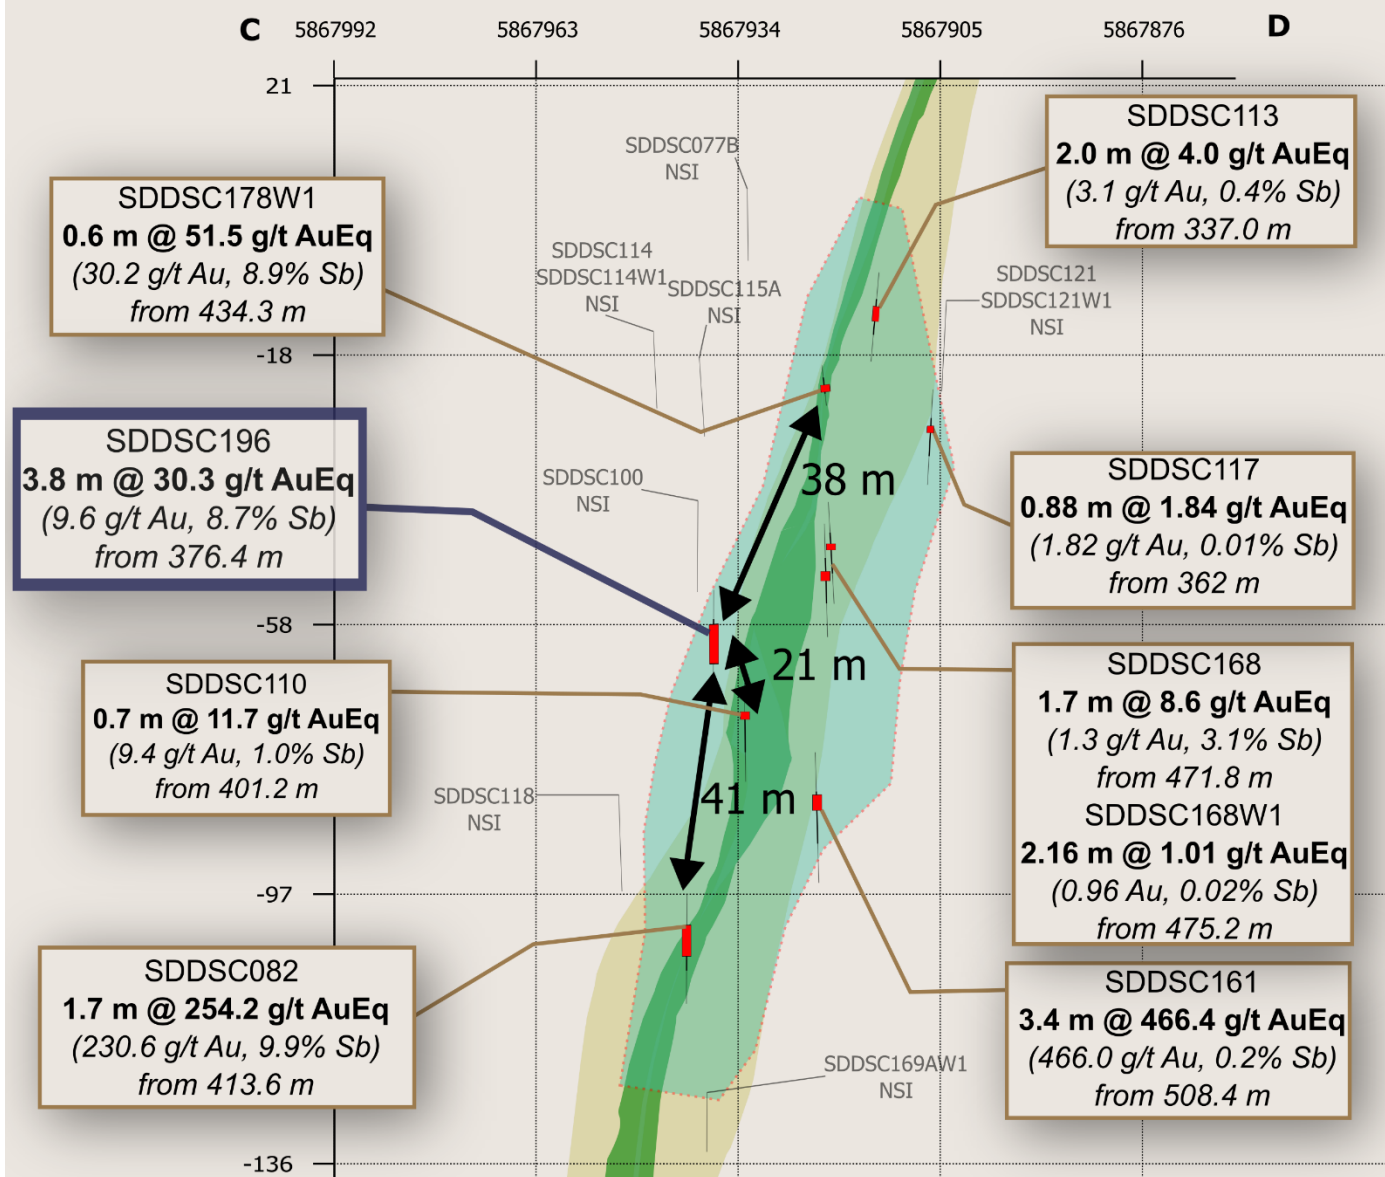

Legend

Dyke Model

- Altered Seds
- Dyke

Exploration Target Domains

- Mineralized Vein Domain

Significant Intercept

- 2 m @ 1.0 g/t AuEq cutoff

0m 50m



Table 1: Drill collar summary table for recent drill holes in progress.

This Release							
Hole ID	Depth (m)	Prospect	East GDA94 Z55	North GDA94 Z55	Elevation (m)	Dip	Azimuth GDA94 Z55
SDDSC176	865.8	Golden Dyke	330950.2	5868006.1	313.7	-53.2	257.3
SDDSC187	518.3	Rising Sun	330510.7	5867852.7	295.4	-50.5	75.4
SDDSC190	451.8	Rising Sun	330511.4	5867852.5	295.5	-40.8	80.1
SDDSC196	1082.53	Rising Sun	330484.2	5867893.4	289.5	-64.4	74.8
Currently being processed and analyzed							
Hole ID	Depth (m)	Prospect	East GDA94 Z55	North GDA94 Z55	Elevation (m)	Dip	Azimuth GDA94 Z55
SDDSC180	1159.77	Christina	330753.2	5867732.9	306.8	-45	273.1
SDDSC191W1	1132.9	Christina	330753.5	5867733	306.8	-46.3	275.2
SDDSC193	668.1	Golden Dyke	330775.4	5867891	295.5	-58.6	262.2
SDDSC194	929	Golden Dyke	330811.4	5867596.4	295.1	-64.4	310
SDDSC194W1	1438.86	Golden Dyke	330811.4	5867596.4	295.1	-64.4	311.2
SDDSC195	152.15	Apollo	330989.7	5867715.6	318	-53.3	60.5
SDDSC197	791.5	Golden Dyke	330217.8	5867664.2	268.9	-58.7	50.8
SDDSC198	273.6	Apollo	331180.4	5867849.1	306.1	-31.5	248.6
SDDSC199	503.43	Apollo	330887.5	5867704.5	312.7	-42.8	52.2
SDDSC200	320.54	Apollo	330887.2	5867704.3	312.7	-47.8	53
SDDSC201	321.4	Rising Sun	330948.3	5868003.4	313.3	-28.9	231.3
SDDSC202	In Progress plan 1100 m	Apollo	331596.2	5867936.6	345.6	-43.4	266.9
SDDSC203	547	Golden Dyke	330775.3	5867888.9	295.5	-47.5	253.4
SDDSC204	1208.3	Apollo	331615.6	5867952.4	346.5	-58.2	270.4
SDDSC205	In Progress plan 1320 m	Rising Sun	330339.8	5867858.5	276.8	-64.6	75.8
SDDSC206	286.2	Golden Dyke	330752.7	5867734.4	306.9	-33	301
SDDSC207	584.25	Christina	330094.8	5867459.3	278.3	-48.8	20.7
SDDSC208	929.3	Christina	330753.5	5867733	306.7	-47.1	281
SDDSC209	271.58	Apollo East	331463.3	5867746.4	341.2	-30.5	34
SDDSC210	512	Golden Dyke	330813.6	5867847.5	301.1	-43.6	264.3
SDDSC211	380.02	Golden Dyke	330700.3	5867880.2	299.4	-40.1	250.4
SDDSC212	438.7	Apollo East	331464.9	5867866.4	333.2	-33.2	261.3
SDDSC213	941.4	Golden Dyke	330094.2	5867458.6	278.3	-62.6	14.6

Hole ID	Depth (m)	Prospect	East GDA94 Z55	North GDA94 Z55	Elevation (m)	Dip	Azimuth GDA94 Z55
SDDSC214	431.6	Apollo	331615.5	5867952.7	346.8	-55.2	269
SDDSC214W1	In Progress plan 1150 m	Apollo	331615.5	5867951.7	346.8	0	0
SDDSC215	476.39	Regional	331603.6	5867183.7	304.9	-38.2	15.4
SDDSC216A	572.36	Golden Dyke	330701.2	5867880.5	299.6	-46.1	250.6
SDDSC217	490.7	Apollo East	331481.2	5867839.5	335.4	-25	261.9
SDDSC218	In Progress plan 700 m	Golden Dyke	330813.6	5867847.5	301.1	-47.6	265.5
SDDSC219	392.2	Golden Dyke	330701.5	5867880.3	299.6	-49.2	247.8
SDDSC220	In Progress plan 830 m	Christina	329780.9	5867551.9	286.5	-26	70.8
SDDSC221	926.6	Golden Dyke	330754.1	5867733	307	-50.6	284.1
SDDSC223	In Progress plan 370 m	Apollo East	331481	5867842	336.2	-34	262
SDDSC224	496.9	Golden Dyke	330700.3	5867880.2	299.4	-37	245.8
SDDSC225	In Progress plan 1270 m	Golden Dyke	330753.5	5867733	306.8	-52.8	283.8
SDDSC226	In Progress plan 1900 m	Rising Sun	331273	5867124	290	56	336.5
SDDSC228	In Progress plan 440 m	Golden Dyke	330701.5	5867880.3	299.6	-47	245

Regional holes currently being processed and analyzed

Hole ID	Press Release Depth	Prospect	East GDA94 Z55	North GDA94 Z55	Elevation (m)	Dip	Azimuth GDA94 Z55
SDDRE016	410.5	Redcastle	302732	5927292	194.61	-50	68
SDDRE017	In Progress plan 359.8 m	Redcastle	305388.6	5926618	206.62	-50	70
SDDTS009	In Progress plan 425 m	Tonstall	336992	5870553	524.6	-28.3	285

Abandoned Drillholes currently being processed and analyzed

Hole ID	Press Release Depth	Prospect	East GDA94 Z55	North GDA94 Z55	Elevation (m)	Dip	Azimuth GDA94 Z55
SDDSC191	864.4	Christina	330753.5	5867733	306.8	-46.1	275.2
SDDSC216	131.2	Golden Dyke	330700.3	5867880.2	299.4	-46.5	252.3

Table 2: Table of mineralized drill hole intersections reported from SDDSC176, SDDSC187, SDDSC190 and SDDSC196 with two cutoff criteria. Lower grades cut at 1.0 g/t AuEq lower cutoff over a maximum of 2 m with higher grades cut at 5.0 g/t AuEq cutoff over a maximum of 1 m. Significant intersections and interval depths are rounded to one decimal place.

Hole number	From (m)	To (m)	Interval (m)	Au g/t	Sb %	AuEq g/t
SDDSC176	516.67	519.07	2.40	7.3	1.0	9.8
Including	516.67	517.27	0.60	27.5	3.6	36.0
SDDSC176	521.15	525.35	4.20	15.6	4.2	25.7
Including	523.97	525.37	1.40	46.4	12.8	77.0
SDDSC176	550.45	551.65	1.20	4.4	0.2	4.9
SDDSC187	238.06	239.66	1.60	2.3	1.3	5.4
Including	238.27	239.57	1.30	2.4	1.5	5.9
SDDSC187	241.29	245.19	3.90	1.1	0.1	1.4
SDDSC187	266.00	269.80	3.80	0.7	0.2	1.1
SDDSC187	278.87	278.97	0.10	1.8	12.5	31.7
SDDSC187	281.07	284.17	3.10	0.3	0.6	1.8
SDDSC187	292.67	297.87	5.20	5.8	0.8	7.8
Including	292.67	294.17	1.50	9.6	2.2	14.8
Including	297.71	297.81	0.10	122.0	2.0	126.7
SDDSC187	302.27	305.17	2.90	0.8	0.2	1.3
SDDSC187	307.02	309.32	2.30	7.0	0.9	9.1
Including	309.00	309.30	0.30	44.5	5.7	58.1
SDDSC187	315.33	317.53	2.20	9.6	1.5	13.1
Including	316.44	317.04	0.60	30.0	4.5	40.8
SDDSC187	319.34	319.84	0.50	6.7	0.8	8.8
SDDSC187	322.80	329.40	6.60	1.4	1.4	4.8
Including	322.80	324.40	1.60	2.2	1.2	5.1
Including	328.49	329.09	0.60	3.0	9.4	25.5
SDDSC187	433.56	433.96	0.40	24.0	14.0	57.5
SDDSC187	472.12	472.62	0.50	3.3	1.3	6.5
SDDSC187	476.44	485.04	8.60	2.5	0.1	2.7
Including	476.44	477.64	1.20	9.6	0.0	9.7
SDDSC190	222.00	222.90	0.90	3.4	0.0	3.5
SDDSC190	227.00	235.00	8.00	1.3	0.0	1.3
SDDSC190	428.06	428.96	0.90	6.6	0.1	6.8
SDDSC196	376.43	380.23	3.80	9.6	8.7	30.3
Including	378.69	379.89	1.20	27.1	26.3	90.0
SDDSC196	384.35	384.75	0.40	2.1	46.7	113.7
SDDSC196	389.59	391.49	1.90	3.8	0.0	3.9
SDDSC196	430.15	431.35	1.20	0.5	0.5	1.7
SDDSC196	438.27	440.57	2.30	1.6	0.7	3.2
Including	440.38	440.58	0.20	16.6	7.0	33.4
SDDSC196	445.71	447.01	1.30	26.6	11.6	54.5
SDDSC196	458.97	459.57	0.60	51.1	0.0	51.2

Hole number	From (m)	To (m)	Interval (m)	Au g/t	Sb %	AuEq g/t
Including	458.97	459.17	0.20	144.0	0.0	144.0
SDDSC196	465.85	466.45	0.60	3.2	0.7	5.0
SDDSC196	473.29	474.19	0.90	1.2	0.5	2.5
SDDSC196	479.45	484.25	4.80	2.9	0.1	3.2
SDDSC196	514.00	514.50	0.50	10.0	0.0	10.0
SDDSC196	528.72	529.02	0.30	84.1	56.5	219.1
SDDSC196	656.44	657.14	0.70	2.3	0.8	4.1
SDDSC196	659.72	665.42	5.70	2.1	0.1	2.3
Including	665.10	665.40	0.30	23.5	0.1	23.8
SDDSC196	673.17	673.77	0.60	4.2	0.4	5.2
SDDSC196	705.03	709.43	4.40	0.2	0.8	2.0
SDDSC196	716.30	716.40	0.10	37.1	11.1	63.6
SDDSC196	722.03	724.03	2.00	1.2	0.0	1.3
SDDSC196	847.38	849.28	1.90	8.4	0.0	8.4
SDDSC196	860.08	860.48	0.40	7.5	0.0	7.5
SDDSC196	869.19	870.49	1.30	670.2	0.1	670.4
SDDSC196	885.10	887.60	2.50	7.3	0.0	7.4
Including	885.10	885.50	0.40	41.9	0.1	42.1
SDDSC196	930.50	931.50	1.00	24.7	0.0	24.7
Including	930.50	930.80	0.30	85.8	0.0	85.8

Table 3: All individual assays reported from SDDSC176, SDDSC187, SDDSC190 and SDDSC196 reported here >0.1g/t AuEq. Individual assay and sample intervals are reported to two decimal places.

Hole number	From (m)	To (m)	Interval (m)	Au g/t	Sb %	AuEq g/t
SDDSC176	499.73	500.76	1.03	0.17	0.00	0.18
SDDSC176	516.67	517.03	0.36	45.30	0.30	46.02
SDDSC176	517.03	517.27	0.24	0.71	8.44	20.88
SDDSC176	517.27	517.49	0.22	0.68	0.56	2.02
SDDSC176	517.49	517.93	0.44	0.29	0.30	1.01
SDDSC176	518.47	519.05	0.58	0.82	0.14	1.15
SDDSC176	519.59	520.03	0.44	0.29	0.17	0.70
SDDSC176	521.15	521.55	0.40	2.05	0.19	2.50
SDDSC176	521.91	522.08	0.17	0.76	0.19	1.21
SDDSC176	522.53	523.03	0.50	0.23	0.08	0.43
SDDSC176	523.24	523.8	0.56	1.00	0.00	1.01
SDDSC176	523.97	524.33	0.36	54.00	31.60	129.52
SDDSC176	524.33	524.44	0.11	1.01	0.06	1.16
SDDSC176	524.44	524.66	0.22	25.30	0.08	25.50
SDDSC176	524.66	524.9	0.24	114.00	6.38	129.25
SDDSC176	524.9	525.17	0.27	20.80	3.78	29.83
SDDSC176	525.17	525.34	0.17	32.50	20.90	82.45
SDDSC176	535.16	535.87	0.71	0.78	0.01	0.80

Hole number	From (m)	To (m)	Interval (m)	Au g/t	Sb %	AuEq g/t
SDDSC176	547.87	549.17	1.30	0.04	0.03	0.10
SDDSC176	549.88	550.45	0.57	0.76	0.08	0.95
SDDSC176	550.45	550.65	0.20	2.43	1.17	5.23
SDDSC176	550.65	551.38	0.73	0.27	0.06	0.41
SDDSC176	551.38	551.63	0.25	17.80	0.04	17.90
SDDSC176	556.06	556.17	0.11	1.95	2.04	6.83
SDDSC176	556.17	556.62	0.45	1.44	0.23	1.99
SDDSC176	556.62	557.92	1.30	0.16	0.03	0.22
SDDSC176	558.72	559.27	0.55	0.37	0.02	0.41
SDDSC176	567.54	567.99	0.45	2.31	0.02	2.36
SDDSC176	569.02	570.21	1.19	0.35	0.06	0.49
SDDSC176	570.21	570.66	0.45	0.69	0.05	0.81
SDDSC176	570.66	571.88	1.22	0.10	0.02	0.14
SDDSC176	587.87	588.52	0.65	0.16	0.00	0.17
SDDSC176	588.52	588.64	0.12	1.84	0.01	1.86
SDDSC176	602.47	603.26	0.79	0.22	0.01	0.23
SDDSC176	658.95	659.6	0.65	0.25	0.01	0.26
SDDSC187	236.5	237.37	0.87	0.14	0.01	0.15
SDDSC187	238.06	238.27	0.21	1.69	0.02	1.73
SDDSC187	238.27	238.57	0.30	3.38	6.39	18.65
SDDSC187	239.18	239.5	0.32	0.30	0.03	0.37
SDDSC187	239.5	239.61	0.11	18.70	0.50	19.90
SDDSC187	241.29	241.75	0.46	1.01	0.99	3.38
SDDSC187	241.75	242.05	0.30	0.42	0.06	0.56
SDDSC187	242.56	242.71	0.15	1.06	0.01	1.09
SDDSC187	243.44	243.84	0.40	5.96	0.01	5.99
SDDSC187	244.16	244.52	0.36	0.52	0.01	0.53
SDDSC187	244.52	245.17	0.65	1.00	0.01	1.03
SDDSC187	245.17	245.42	0.25	0.38	0.02	0.42
SDDSC187	245.78	246.46	0.68	0.23	0.00	0.24
SDDSC187	246.46	246.9	0.44	0.35	0.00	0.36
SDDSC187	246.9	247.14	0.24	5.36	0.02	5.40
SDDSC187	247.14	247.86	0.72	0.67	0.00	0.68
SDDSC187	247.86	248.46	0.60	0.28	0.00	0.29
SDDSC187	249.25	249.88	0.63	0.59	0.00	0.60
SDDSC187	249.98	250.3	0.32	0.38	0.00	0.39
SDDSC187	252.28	252.46	0.18	0.05	0.42	1.05
SDDSC187	258.64	258.76	0.12	2.39	3.09	9.78
SDDSC187	259.02	259.24	0.22	0.21	1.12	2.89
SDDSC187	259.24	260.1	0.86	0.50	0.03	0.57
SDDSC187	265.47	265.72	0.25	0.68	0.02	0.72
SDDSC187	266	266.38	0.38	1.18	0.01	1.19

Hole number	From (m)	To (m)	Interval (m)	Au g/t	Sb %	AuEq g/t
SDDSC187	266.66	266.97	0.31	1.32	0.45	2.40
SDDSC187	266.97	267.74	0.77	0.39	0.28	1.06
SDDSC187	267.74	268.52	0.78	0.35	0.02	0.39
SDDSC187	268.52	269.21	0.69	0.68	0.43	1.71
SDDSC187	269.21	269.8	0.59	0.96	0.10	1.20
SDDSC187	270.5	271.42	0.92	0.46	0.10	0.69
SDDSC187	271.42	271.8	0.38	0.36	0.19	0.81
SDDSC187	272.3	273.24	0.94	0.80	0.01	0.83
SDDSC187	277.62	277.98	0.36	0.26	0.01	0.28
SDDSC187	277.98	278.87	0.89	0.18	0.01	0.21
SDDSC187	278.87	278.98	0.11	1.83	12.50	31.71
SDDSC187	279.15	280	0.85	0.31	0.28	0.98
SDDSC187	280	281.07	1.07	0.12	0.02	0.16
SDDSC187	281.07	281.19	0.12	0.20	0.83	2.18
SDDSC187	281.19	282.17	0.98	0.11	0.02	0.16
SDDSC187	282.17	282.61	0.44	0.62	0.47	1.74
SDDSC187	282.61	283.18	0.57	0.16	0.02	0.20
SDDSC187	283.18	283.68	0.50	0.20	3.01	7.39
SDDSC187	283.88	284.14	0.26	1.68	0.05	1.79
SDDSC187	284.14	285.05	0.91	0.40	0.01	0.42
SDDSC187	285.05	286.07	1.02	0.30	0.02	0.34
SDDSC187	288.37	288.5	0.13	1.18	1.20	4.05
SDDSC187	289.68	290.42	0.74	0.08	0.09	0.29
SDDSC187	290.76	291.32	0.56	0.15	0.22	0.68
SDDSC187	292.21	292.67	0.46	0.34	0.02	0.39
SDDSC187	292.67	293.1	0.43	23.00	3.53	31.44
SDDSC187	293.1	293.38	0.28	0.68	0.08	0.87
SDDSC187	293.38	293.49	0.11	7.78	6.12	22.41
SDDSC187	293.49	293.83	0.34	1.57	1.58	5.35
SDDSC187	293.83	294.17	0.34	8.50	1.62	12.37
SDDSC187	294.17	294.87	0.70	0.25	0.05	0.36
SDDSC187	294.87	295.44	0.57	0.97	0.62	2.45
SDDSC187	295.79	296.03	0.24	1.77	0.12	2.06
SDDSC187	296.03	296.52	0.49	1.38	0.04	1.47
SDDSC187	296.52	296.88	0.36	0.29	0.01	0.32
SDDSC187	296.88	297.21	0.33	0.60	0.47	1.72
SDDSC187	297.21	297.71	0.50	0.30	0.02	0.34
SDDSC187	297.71	297.82	0.11	122.00	1.98	126.73
SDDSC187	300.78	301.22	0.44	0.25	0.03	0.32
SDDSC187	301.95	302.27	0.32	0.18	0.25	0.78
SDDSC187	302.27	302.9	0.63	2.45	0.44	3.50
SDDSC187	303.32	303.45	0.13	0.64	1.23	3.58

Hole number	From (m)	To (m)	Interval (m)	Au g/t	Sb %	AuEq g/t
SDDSC187	303.45	303.85	0.40	0.50	0.16	0.88
SDDSC187	303.85	304.79	0.94	0.30	0.03	0.37
SDDSC187	304.79	305.2	0.41	0.79	0.10	1.03
SDDSC187	305.2	305.95	0.75	0.43	0.03	0.50
SDDSC187	307.02	307.44	0.42	6.76	0.84	8.77
SDDSC187	307.44	308.24	0.80	0.56	0.04	0.66
SDDSC187	308.4	309	0.60	0.58	0.02	0.63
SDDSC187	309	309.27	0.27	44.50	5.71	58.15
SDDSC187	309.27	309.57	0.30	0.92	0.02	0.96
SDDSC187	309.57	309.78	0.21	0.70	0.01	0.73
SDDSC187	309.78	310.25	0.47	0.27	0.02	0.32
SDDSC187	310.25	310.97	0.72	0.45	0.05	0.56
SDDSC187	310.97	311.34	0.37	0.93	0.04	1.03
SDDSC187	311.34	311.57	0.23	4.62	0.13	4.93
SDDSC187	311.57	311.93	0.36	0.61	0.04	0.71
SDDSC187	313.95	314.64	0.69	0.20	0.03	0.27
SDDSC187	314.64	315.33	0.69	0.49	0.02	0.54
SDDSC187	315.33	315.98	0.65	4.02	0.13	4.33
SDDSC187	315.98	316.44	0.46	1.41	0.57	2.77
SDDSC187	316.44	316.68	0.24	71.00	9.03	92.58
SDDSC187	316.68	316.87	0.19	1.03	0.25	1.63
SDDSC187	316.87	317.02	0.15	1.25	2.60	7.46
SDDSC187	317.33	317.5	0.17	0.56	1.08	3.14
SDDSC187	317.88	318.74	0.86	0.23	0.01	0.26
SDDSC187	319.34	319.64	0.30	0.21	0.43	1.24
SDDSC187	319.64	319.79	0.15	19.80	1.69	23.84
SDDSC187	319.79	320.36	0.57	0.17	0.10	0.41
SDDSC187	321.26	321.37	0.11	1.67	0.66	3.25
SDDSC187	321.86	321.97	0.11	0.22	0.31	0.96
SDDSC187	321.97	322.18	0.21	0.10	0.19	0.55
SDDSC187	322.45	322.8	0.35	0.24	0.12	0.53
SDDSC187	322.8	323.16	0.36	0.93	1.72	5.04
SDDSC187	323.16	323.59	0.43	4.82	2.38	10.51
SDDSC187	323.59	324.25	0.66	0.23	0.12	0.52
SDDSC187	324.25	324.36	0.11	7.77	1.41	11.14
SDDSC187	324.36	324.87	0.51	0.17	0.02	0.22
SDDSC187	324.87	324.98	0.11	0.34	0.50	1.54
SDDSC187	324.98	325.59	0.61	0.40	0.03	0.48
SDDSC187	325.59	325.9	0.31	0.30	0.03	0.36
SDDSC187	325.9	326.07	0.17	6.34	7.22	23.60
SDDSC187	326.07	326.17	0.10	2.24	0.37	3.12
SDDSC187	326.17	326.8	0.63	1.08	0.10	1.32

Hole number	From (m)	To (m)	Interval (m)	Au g/t	Sb %	AuEq g/t
SDDSC187	327.12	327.26	0.14	4.88	3.70	13.72
SDDSC187	327.26	327.52	0.26	0.99	0.21	1.49
SDDSC187	328.08	328.49	0.41	0.71	0.04	0.80
SDDSC187	328.49	328.75	0.26	3.75	14.20	37.69
SDDSC187	328.75	329.06	0.31	2.38	5.37	15.21
SDDSC187	329.06	329.36	0.30	0.96	0.05	1.07
SDDSC187	329.36	329.77	0.41	0.23	0.16	0.61
SDDSC187	329.77	330.4	0.63	0.12	0.03	0.20
SDDSC187	333	334	1.00	0.29	0.01	0.31
SDDSC187	337	338	1.00	0.10	0.01	0.12
SDDSC187	345.42	345.74	0.32	0.32	0.02	0.36
SDDSC187	359.28	360.5	1.22	0.09	0.01	0.10
SDDSC187	406.9	407.45	0.55	0.19	0.00	0.20
SDDSC187	407.45	407.66	0.21	2.36	0.01	2.38
SDDSC187	427.4	428.7	1.30	0.16	0.02	0.22
SDDSC187	430.5	431.8	1.30	0.76	0.07	0.93
SDDSC187	431.8	432.28	0.48	0.29	0.24	0.86
SDDSC187	432.59	433.56	0.97	0.34	0.18	0.77
SDDSC187	433.56	433.71	0.15	57.80	40.30	154.12
SDDSC187	433.71	434	0.29	6.57	0.40	7.53
SDDSC187	434.57	434.77	0.20	0.64	0.01	0.67
SDDSC187	440.86	441.27	0.41	0.26	0.00	0.27
SDDSC187	442.47	443.77	1.30	0.10	0.01	0.12
SDDSC187	445.2	446.26	1.06	0.09	0.00	0.10
SDDSC187	467.05	468.03	0.98	0.19	0.05	0.30
SDDSC187	468.3	468.64	0.34	0.32	0.59	1.73
SDDSC187	468.64	469.19	0.55	0.57	0.31	1.31
SDDSC187	469.92	470.36	0.44	0.63	0.10	0.86
SDDSC187	472.12	472.42	0.30	0.35	0.50	1.55
SDDSC187	472.42	472.62	0.20	7.81	2.53	13.86
SDDSC187	474	475.13	1.13	0.22	0.02	0.26
SDDSC187	475.13	475.34	0.21	0.56	0.03	0.63
SDDSC187	476.44	477.63	1.19	9.61	0.05	9.73
SDDSC187	477.63	478.24	0.61	0.60	0.07	0.77
SDDSC187	478.24	478.81	0.57	0.21	0.08	0.39
SDDSC187	479.4	479.6	0.20	1.05	0.18	1.48
SDDSC187	479.95	480.5	0.55	0.22	0.04	0.31
SDDSC187	480.5	480.9	0.40	10.90	0.00	10.90
SDDSC187	480.9	481.9	1.00	0.53	0.04	0.62
SDDSC187	481.9	482.05	0.15	1.17	0.18	1.60
SDDSC187	482.05	482.75	0.70	0.83	0.52	2.07
SDDSC187	482.75	483	0.25	1.60	0.01	1.61

Hole number	From (m)	To (m)	Interval (m)	Au g/t	Sb %	AuEq g/t
SDDSC187	483	484	1.00	1.10	0.17	1.51
SDDSC187	484	485	1.00	1.94	0.04	2.03
SDDSC187	489.85	490.65	0.80	0.17	0.01	0.19
SDDSC187	491.8	493	1.20	0.11	0.01	0.12
SDDSC190	207	207.9	0.90	0.18	0.01	0.19
SDDSC190	209.25	209.7	0.45	0.02	0.55	1.33
SDDSC190	210.65	211.33	0.68	0.20	0.00	0.21
SDDSC190	214.45	215.4	0.95	0.16	0.01	0.17
SDDSC190	215.4	216.6	1.20	1.21	0.02	1.26
SDDSC190	220	221	1.00	0.32	0.01	0.34
SDDSC190	222	222.9	0.90	3.43	0.01	3.45
SDDSC190	222.9	224	1.10	0.24	0.02	0.28
SDDSC190	225	226	1.00	0.13	0.02	0.19
SDDSC190	227	228	1.00	1.16	0.01	1.19
SDDSC190	228	229	1.00	3.15	0.02	3.19
SDDSC190	229	230	1.00	0.77	0.01	0.80
SDDSC190	230	230.45	0.45	0.73	0.01	0.76
SDDSC190	230.45	231	0.55	0.29	0.01	0.30
SDDSC190	231	232	1.00	1.24	0.01	1.25
SDDSC190	232	233	1.00	1.24	0.01	1.25
SDDSC190	233	234	1.00	0.43	0.01	0.45
SDDSC190	234	235	1.00	2.05	0.00	2.06
SDDSC190	235	235.65	0.65	0.28	0.00	0.29
SDDSC190	238	239	1.00	0.30	0.00	0.31
SDDSC190	423.03	424.16	1.13	0.79	0.03	0.86
SDDSC190	424.16	425.46	1.30	0.17	0.01	0.20
SDDSC190	425.46	426.76	1.30	0.17	0.02	0.21
SDDSC190	426.76	428.06	1.30	0.16	0.01	0.19
SDDSC190	428.06	428.57	0.51	6.40	0.05	6.51
SDDSC190	428.57	428.95	0.38	6.94	0.06	7.08
SDDSC190	428.95	430.25	1.30	0.19	0.01	0.21
SDDSC190	433.27	434.3	1.03	0.16	0.01	0.18
SDDSC190	434.67	435.88	1.21	0.10	0.01	0.12
SDDSC196	369.14	370.06	0.92	0.42	0.41	1.40
SDDSC196	370.06	371.36	1.30	0.04	0.03	0.11
SDDSC196	373.83	375.13	1.30	0.04	0.02	0.09
SDDSC196	376.43	377.73	1.30	1.60	0.03	1.68
SDDSC196	377.73	378.69	0.96	0.27	0.01	0.30
SDDSC196	378.69	379.31	0.62	1.44	2.62	7.70
SDDSC196	379.31	379.51	0.20	19.30	48.30	134.74
SDDSC196	379.51	379.74	0.23	20.30	54.70	151.03
SDDSC196	379.74	379.93	0.19	127.00	46.30	237.66

Hole number	From (m)	To (m)	Interval (m)	Au g/t	Sb %	AuEq g/t
SDDSC196	379.93	380.2	0.27	1.07	0.05	1.18
SDDSC196	380.2	380.91	0.71	0.16	0.01	0.18
SDDSC196	380.91	381.07	0.16	0.81	0.01	0.84
SDDSC196	381.07	382.02	0.95	0.12	0.05	0.23
SDDSC196	382.02	382.88	0.86	0.09	0.02	0.13
SDDSC196	382.88	383.52	0.64	0.18	0.02	0.22
SDDSC196	384.35	384.77	0.42	2.11	46.70	113.72
SDDSC196	384.77	386.07	1.30	0.12	0.01	0.15
SDDSC196	389.59	389.99	0.40	1.10	0.01	1.12
SDDSC196	389.99	390.9	0.91	4.80	0.03	4.86
SDDSC196	390.9	391.51	0.61	4.16	0.00	4.16
SDDSC196	391.51	392.8	1.29	0.08	0.00	0.08
SDDSC196	419	420	1.00	0.64	0.01	0.66
SDDSC196	420	421	1.00	0.41	0.00	0.42
SDDSC196	426.5	427.15	0.65	0.37	0.21	0.87
SDDSC196	427.15	428.15	1.00	0.19	0.04	0.28
SDDSC196	428.15	429.15	1.00	0.15	0.01	0.17
SDDSC196	430.15	430.9	0.75	0.73	0.57	2.09
SDDSC196	430.9	431.3	0.40	0.15	0.39	1.08
SDDSC196	434.82	435.62	0.80	0.58	0.02	0.63
SDDSC196	436.22	436.53	0.31	0.37	0.11	0.63
SDDSC196	438.27	438.7	0.43	1.25	0.40	2.21
SDDSC196	439.48	439.7	0.22	1.11	0.80	3.02
SDDSC196	439.7	440.38	0.68	0.12	0.05	0.24
SDDSC196	440.38	440.54	0.16	16.60	7.03	33.40
SDDSC196	445.71	445.93	0.22	11.30	19.90	58.86
SDDSC196	445.93	446.09	0.16	78.50	65.90	236.00
SDDSC196	446.09	447	0.91	21.20	0.11	21.46
SDDSC196	447	448	1.00	0.12	0.02	0.16
SDDSC196	448	449	1.00	0.49	0.02	0.53
SDDSC196	449	450	1.00	0.44	0.01	0.47
SDDSC196	450	451	1.00	0.18	0.01	0.20
SDDSC196	451	452	1.00	0.15	0.04	0.25
SDDSC196	453.83	455.03	1.20	0.10	0.01	0.12
SDDSC196	458.97	459.18	0.21	144.00	0.02	144.04
SDDSC196	459.18	459.58	0.40	2.37	0.06	2.52
SDDSC196	461.81	462.15	0.34	0.18	0.14	0.51
SDDSC196	464.99	465.33	0.34	0.39	0.07	0.55
SDDSC196	465.33	465.85	0.52	0.34	0.20	0.82
SDDSC196	465.85	466.4	0.55	3.23	0.74	5.00
SDDSC196	466.4	467	0.60	0.22	0.06	0.36
SDDSC196	469.2	470.08	0.88	0.03	0.06	0.17

Hole number	From (m)	To (m)	Interval (m)	Au g/t	Sb %	AuEq g/t
SDDSC196	470.67	470.97	0.30	0.60	0.01	0.62
SDDSC196	473.29	474.15	0.86	1.21	0.54	2.50
SDDSC196	476.73	477.19	0.46	0.61	0.07	0.77
SDDSC196	478.06	478.46	0.40	0.29	0.03	0.36
SDDSC196	479.45	479.69	0.24	17.40	0.22	17.93
SDDSC196	479.69	479.82	0.13	0.59	0.35	1.43
SDDSC196	479.82	480.66	0.84	0.23	0.07	0.39
SDDSC196	480.66	480.81	0.15	3.05	0.56	4.39
SDDSC196	480.81	481.01	0.20	17.30	0.51	18.52
SDDSC196	482.18	482.39	0.21	14.20	0.94	16.45
SDDSC196	483.6	484.27	0.67	3.77	0.07	3.93
SDDSC196	485.74	486.78	1.04	0.25	0.01	0.28
SDDSC196	488.8	489.37	0.57	0.35	0.01	0.37
SDDSC196	514	514.5	0.50	10.00	0.00	10.01
SDDSC196	516.5	517.5	1.00	0.32	0.01	0.35
SDDSC196	519	519.82	0.82	0.31	0.02	0.36
SDDSC196	519.82	520.6	0.78	0.32	0.01	0.34
SDDSC196	528	528.72	0.72	0.14	0.05	0.27
SDDSC196	528.72	529	0.28	84.10	56.50	219.14
SDDSC196	529	530	1.00	0.65	0.08	0.84
SDDSC196	532	533	1.00	0.10	0.01	0.11
SDDSC196	540	541	1.00	0.25	0.00	0.26
SDDSC196	542.6	543.5	0.90	-0.01	0.07	0.16
SDDSC196	543.5	544.1	0.60	1.31	0.01	1.32
SDDSC196	544.1	545	0.90	0.20	0.01	0.23
SDDSC196	547	548	1.00	0.61	0.03	0.69
SDDSC196	548	549	1.00	0.12	0.01	0.15
SDDSC196	550	551	1.00	0.16	0.01	0.17
SDDSC196	551	552	1.00	0.10	0.00	0.11
SDDSC196	566	566.2	0.20	0.49	0.07	0.65
SDDSC196	580.2	580.6	0.40	2.00	0.01	2.02
SDDSC196	588	588.6	0.60	0.47	0.01	0.49
SDDSC196	590.2	591.03	0.83	0.31	0.01	0.34
SDDSC196	596	597	1.00	0.13	0.01	0.15
SDDSC196	607.04	607.57	0.53	0.66	0.19	1.11
SDDSC196	607.57	607.91	0.34	0.46	0.09	0.67
SDDSC196	607.91	608.26	0.35	0.87	0.26	1.49
SDDSC196	608.26	608.58	0.32	0.17	0.19	0.62
SDDSC196	608.9	609.81	0.91	0.21	0.08	0.41
SDDSC196	609.81	610.55	0.74	0.13	0.03	0.19
SDDSC196	610.55	610.97	0.42	0.31	0.23	0.86
SDDSC196	610.97	611.5	0.53	0.23	0.03	0.31

Hole number	From (m)	To (m)	Interval (m)	Au g/t	Sb %	AuEq g/t
SDDSC196	617.66	618.86	1.20	0.08	0.02	0.13
SDDSC196	618.86	619.12	0.26	0.83	0.04	0.93
SDDSC196	622.9	624	1.10	0.19	0.00	0.20
SDDSC196	633.42	634.65	1.23	0.29	0.01	0.32
SDDSC196	636.72	637.66	0.94	0.12	0.01	0.15
SDDSC196	638.38	638.67	0.29	0.58	0.03	0.64
SDDSC196	638.67	639.5	0.83	0.14	0.01	0.17
SDDSC196	640.75	641.08	0.33	0.27	0.02	0.31
SDDSC196	644.53	644.87	0.34	0.42	0.06	0.56
SDDSC196	652.06	652.6	0.54	0.23	0.08	0.43
SDDSC196	654.5	655.35	0.85	0.08	0.03	0.14
SDDSC196	655.8	656.44	0.64	0.55	0.05	0.66
SDDSC196	656.44	657.14	0.70	2.26	0.75	4.05
SDDSC196	657.14	657.59	0.45	0.42	0.02	0.47
SDDSC196	657.59	658.3	0.71	0.75	0.02	0.81
SDDSC196	658.3	658.89	0.59	0.71	0.05	0.82
SDDSC196	658.89	659.72	0.83	0.42	0.02	0.46
SDDSC196	659.72	660.92	1.20	1.01	0.02	1.05
SDDSC196	660.92	661.15	0.23	1.62	0.02	1.68
SDDSC196	661.15	661.35	0.20	1.08	0.60	2.51
SDDSC196	661.35	661.62	0.27	0.80	0.33	1.59
SDDSC196	663.12	663.44	0.32	3.86	0.19	4.31
SDDSC196	664.07	664.17	0.10	2.10	0.08	2.29
SDDSC196	664.17	664.8	0.63	0.47	0.04	0.57
SDDSC196	664.8	664.96	0.16	0.71	0.02	0.76
SDDSC196	664.96	665.1	0.14	1.96	0.48	3.11
SDDSC196	665.1	665.42	0.32	23.50	0.11	23.76
SDDSC196	665.42	665.58	0.16	0.67	0.02	0.73
SDDSC196	672.35	673.17	0.82	0.18	0.08	0.38
SDDSC196	673.17	673.77	0.60	4.20	0.42	5.20
SDDSC196	704.77	705.03	0.26	0.15	0.35	0.99
SDDSC196	705.03	705.37	0.34	0.37	0.80	2.28
SDDSC196	705.37	705.98	0.61	0.11	0.04	0.21
SDDSC196	705.98	706.55	0.57	0.16	0.33	0.95
SDDSC196	706.55	706.85	0.30	0.09	0.11	0.35
SDDSC196	706.85	707.42	0.57	0.24	0.99	2.61
SDDSC196	707.42	708.25	0.83	0.15	1.27	3.19
SDDSC196	708.25	709.38	1.13	0.09	1.03	2.55
SDDSC196	709.38	710.54	1.16	0.07	0.34	0.88
SDDSC196	710.54	711.7	1.16	0.04	0.03	0.12
SDDSC196	713.66	714.15	0.49	0.08	0.05	0.20
SDDSC196	716.3	716.4	0.10	37.10	11.10	63.63

Hole number	From (m)	To (m)	Interval (m)	Au g/t	Sb %	AuEq g/t
SDDSC196	720.82	721.83	1.01	0.72	0.01	0.74
SDDSC196	721.83	722.03	0.20	0.69	0.01	0.71
SDDSC196	722.03	722.86	0.83	1.03	0.04	1.13
SDDSC196	722.86	723.1	0.24	1.70	0.06	1.83
SDDSC196	723.1	724.02	0.92	1.28	0.01	1.31
SDDSC196	724.02	724.46	0.44	0.44	0.01	0.47
SDDSC196	724.46	725.66	1.20	0.91	0.02	0.95
SDDSC196	726.9	728.2	1.30	0.04	0.03	0.11
SDDSC196	731.95	732.75	0.80	0.56	0.00	0.57
SDDSC196	735	736	1.00	0.14	0.40	1.10
SDDSC196	736	737	1.00	0.10	0.15	0.46
SDDSC196	743.8	744.9	1.10	0.30	0.01	0.31
SDDSC196	752.05	752.3	0.25	0.75	0.62	2.23
SDDSC196	758	759	1.00	0.09	0.05	0.22
SDDSC196	766	767	1.00	0.06	0.03	0.14
SDDSC196	773	774	1.00	0.02	0.05	0.13
SDDSC196	777	778	1.00	0.07	0.04	0.16
SDDSC196	780.3	780.5	0.20	0.04	0.59	1.45
SDDSC196	781.7	782.05	0.35	0.13	0.28	0.80
SDDSC196	791.43	792.13	0.70	0.17	0.00	0.18
SDDSC196	793.52	794.12	0.60	0.67	0.01	0.70
SDDSC196	794.12	794.95	0.83	1.00	0.01	1.03
SDDSC196	794.95	795.6	0.65	0.16	0.00	0.17
SDDSC196	796	796.56	0.56	0.20	0.00	0.21
SDDSC196	802.12	802.46	0.34	0.42	0.00	0.43
SDDSC196	804.72	805.16	0.44	0.27	0.00	0.28
SDDSC196	810.67	811.33	0.66	0.27	0.03	0.34
SDDSC196	819.51	820.17	0.66	0.20	0.00	0.21
SDDSC196	822.14	822.51	0.37	0.28	0.07	0.45
SDDSC196	822.51	823	0.49	0.20	0.08	0.39
SDDSC196	823	823.19	0.19	0.14	0.18	0.57
SDDSC196	823.19	823.67	0.48	0.32	0.06	0.47
SDDSC196	823.67	824.06	0.39	0.41	0.19	0.86
SDDSC196	824.17	824.63	0.46	0.43	0.07	0.59
SDDSC196	824.63	825.22	0.59	0.60	0.01	0.63
SDDSC196	825.22	825.82	0.60	0.35	0.01	0.37
SDDSC196	825.82	827	1.18	0.13	0.00	0.14
SDDSC196	828	828.4	0.40	2.74	0.00	2.75
SDDSC196	836.15	836.88	0.73	0.30	0.00	0.31
SDDSC196	836.88	837.18	0.30	0.51	0.01	0.53
SDDSC196	837.18	838.14	0.96	0.28	0.01	0.30
SDDSC196	841.04	841.2	0.16	2.34	0.02	2.38

Hole number	From (m)	To (m)	Interval (m)	Au g/t	Sb %	AuEq g/t
SDDSC196	841.2	841.84	0.64	0.16	0.00	0.17
SDDSC196	841.98	842.95	0.97	0.13	0.00	0.14
SDDSC196	847.38	847.94	0.56	5.31	0.01	5.33
SDDSC196	847.94	848.27	0.33	35.90	0.01	35.92
SDDSC196	848.27	849.3	1.03	1.22	0.02	1.26
SDDSC196	854.76	855.44	0.68	0.18	0.01	0.20
SDDSC196	856.27	856.79	0.52	0.89	0.01	0.91
SDDSC196	857	857.45	0.45	0.32	0.01	0.34
SDDSC196	860.08	860.47	0.39	7.53	0.00	7.54
SDDSC196	865.65	866.22	0.57	0.15	0.02	0.19
SDDSC196	868.05	868.64	0.59	0.27	0.03	0.34
SDDSC196	868.64	869.19	0.55	0.56	0.01	0.57
SDDSC196	869.19	870.09	0.90	978.00	0.06	978.15
SDDSC196	870.09	870.52	0.43	26.10	0.04	26.19
SDDSC196	870.52	871.82	1.30	0.11	0.00	0.12
SDDSC196	876.61	877.28	0.67	0.25	0.01	0.26
SDDSC196	877.28	877.76	0.48	0.46	0.01	0.48
SDDSC196	877.76	878.4	0.64	0.28	0.01	0.29
SDDSC196	879.3	879.63	0.33	0.95	0.00	0.96
SDDSC196	880.33	880.9	0.57	0.18	0.01	0.20
SDDSC196	881.53	881.89	0.36	0.61	0.00	0.62
SDDSC196	884.83	885.1	0.27	0.36	0.01	0.39
SDDSC196	885.1	885.51	0.41	41.90	0.09	42.11
SDDSC196	887.26	887.56	0.30	2.44	0.01	2.46
SDDSC196	891.3	892.03	0.73	0.40	0.00	0.41
SDDSC196	897.55	898.05	0.50	0.36	0.01	0.38
SDDSC196	900.2	900.48	0.28	1.30	0.01	1.32
SDDSC196	900.48	901	0.52	1.81	0.03	1.87
SDDSC196	903.45	903.8	0.35	1.60	0.01	1.62
SDDSC196	903.8	904	0.20	1.49	0.01	1.52
SDDSC196	904.6	905.9	1.30	0.12	0.00	0.13
SDDSC196	905.9	907.2	1.30	0.11	0.01	0.13
SDDSC196	914.21	914.7	0.49	0.29	0.01	0.31
SDDSC196	914.7	916	1.30	0.66	0.00	0.67
SDDSC196	917.7	918.28	0.58	0.40	0.01	0.42
SDDSC196	918.28	918.65	0.37	1.08	0.00	1.08
SDDSC196	924.2	925.5	1.30	0.09	0.01	0.11
SDDSC196	930.5	930.75	0.25	85.80	0.01	85.81
SDDSC196	930.75	931	0.25	0.92	0.01	0.94
SDDSC196	931	931.47	0.47	4.87	0.01	4.89
SDDSC196	931.47	932.1	0.63	0.21	0.01	0.23
SDDSC196	932.1	932.95	0.85	0.34	0.01	0.36

Hole number	From (m)	To (m)	Interval (m)	Au g/t	Sb %	AuEq g/t
SDDSC196	932.95	933.7	0.75	0.26	0.01	0.28
SDDSC196	933.7	935	1.30	0.35	0.01	0.38
SDDSC196	935	935.66	0.66	0.21	0.01	0.24
SDDSC196	956.89	958.1	1.21	0.18	0.00	0.19
SDDSC196	958.1	959.02	0.92	0.16	0.00	0.17
SDDSC196	959.02	959.64	0.62	0.37	0.00	0.37
SDDSC196	959.64	960.94	1.30	0.18	0.00	0.19
SDDSC196	964.4	964.83	0.43	0.37	0.00	0.38
SDDSC196	969.13	970.36	1.23	0.37	0.01	0.39
SDDSC196	975.45	976.35	0.90	0.11	0.00	0.11
SDDSC196	977.04	978	0.96	0.11	0.00	0.11
SDDSC196	978	978.68	0.68	0.52	0.00	0.53
SDDSC196	978.68	979.27	0.59	0.20	0.01	0.22
SDDSC196	979.27	980.39	1.12	0.51	0.00	0.52
SDDSC196	980.39	981.31	0.92	0.37	0.00	0.38
SDDSC196	981.31	982.61	1.30	0.10	0.00	0.11
SDDSC196	986.51	987.78	1.27	0.31	0.00	0.32
SDDSC196	987.78	989.08	1.30	0.08	0.00	0.09
SDDSC196	990.01	991.2	1.19	0.51	0.01	0.53
SDDSC196	991.2	992.5	1.30	0.21	0.00	0.22
SDDSC196	992.5	993.8	1.30	0.10	0.00	0.11
SDDSC196	995.65	996.64	0.99	0.11	0.00	0.12
SDDSC196	996.64	997.87	1.23	0.55	0.00	0.56
SDDSC196	1014.82	1016	1.18	1.00	0.00	1.01
SDDSC196	1020	1020.6	0.64	0.95	0.01	0.96
SDDSC196	1021.07	1021.4	0.28	0.90	0.01	0.91
SDDSC196	1021.35	1021.6	0.28	0.47	0.00	0.48
SDDSC196	1021.63	1022.5	0.91	0.64	0.04	0.72
SDDSC196	1022.54	1023.5	0.98	0.10	0.00	0.11
SDDSC196	1023.52	1024.4	0.83	0.45	0.00	0.46
SDDSC196	1025.3	1025.8	0.45	0.33	0.00	0.33
SDDSC196	1031.16	1032.5	1.30	0.27	0.00	0.27

JORC Table 1

Section 1 Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	- Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling. - Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. - Aspects of the determination of mineralization that are Material to the Public Report. - In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralization types (e.g. submarine nodules) may warrant disclosure of detailed information.	- Sampling has been conducted on drill core (half core for >90% and quarter core for check samples), grab samples (field samples of in-situ bedrock and boulders; including duplicate samples), trench samples (rock chips, including duplicates) and soil samples (including duplicate samples). Locations of field samples were obtained by using a GPS, generally to an accuracy of within 5 metres. Drill hole and trench locations have been confirmed to <1 metre using a differential GPS. Samples locations have also been verified by plotting locations on the high-resolution Lidar maps - Drill core is marked for cutting and cut using an automated diamond saw used by Company staff in Kilmore. Samples are bagged at the core saw and transported to the Bendigo On Site Laboratory for assay. At On Site samples are crushed using a jaw crusher combined with a rotary splitter and a 1 kg split is separated for pulverizing (LM5) and assay. - Standard fire assay techniques are used for gold assay on a 30 g charge by experienced staff (used to dealing with high sulfide and stibnite-rich charges). On Site gold method by fire assay code PE01S. - Screen fire assay is used to understand gold grain-size distribution where coarse gold is evident. - ICP-OES is used to analyse the aqua regia digested pulp for an additional 12 elements (method BM011) and over-range antimony is measured using flame AAS (method known as B050). - Soil samples were sieved in the field and an 80-mesh sample bagged and transported to ALS Global laboratories in Brisbane for super-low level gold analysis on a 50 g samples by method ST44 (using aqua regia and ICP-MS). - Grab and rock chip samples are generally submitted to On Site Laboratories for standard fire assay and 12 element ICP-OES as described above.
Drilling techniques	Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc.).	HQ or NQ diameter diamond drill core, oriented using Axis Champ orientation tool with the orientation line marked on the base of the drill core by the driller/offsider. A standard 3 metre core barrel has been found to be most effective in both the hard and soft rocks in the project.
Drill sample recovery	Method of recording and assessing core and chip sample recoveries and results assessed.	Core recoveries were maximised using HQ or NQ diamond drill core with careful control over water pressure to maintain soft-rock integrity and prevent

Criteria	JORC Code explanation	Commentary
	- Measures taken to maximise sample recovery and ensure representative nature of the samples. - Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	loss of fines from soft drill core. Recoveries are determined on a metre-by-metre basis in the core shed using a tape measure against marked up drill core checking against driller's core blocks. Plots of grade versus recovery and RQD (described below) show no trends relating to loss of drill core, or fines.
Logging	- Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. - Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography. - The total length and percentage of the relevant intersections logged.	- Geotechnical logging of the drill core takes place on racks in the company core shed. Core orientations marked at the drill rig are checked for consistency, and base of core orientation lines are marked on core where two or more orientations match within 10 degrees. Core recoveries are measured for each metre RQD measurements (cumulative quantity of core sticks > 10 cm in a metre) are made on a metre-by-metre basis. - Each tray of drill core is photographed (wet and dry) after it is fully marked up for sampling and cutting. - The ½ core cutting line is placed approximately 10 degrees above the orientation line so the orientation line is retained in the core tray for future work. - Geological logging of drill core includes the following parameters: Rock types, lithology Alteration Structural information (orientations of veins, bedding, fractures using standard alpha-beta measurements from orientation line; or, in the case of un-oriented parts of the core, the alpha angles are measured) Veining (quartz, carbonate, stibnite) Key minerals (visible under hand lens, e.g. gold, stibnite) 100% of drill core is logged for all components described above into the company MX logging database. - Logging is fully quantitative, although the description of lithology and alteration relies on visible observations by trained geologists. - Each tray of drill core is photographed (wet and dry) after it is fully marked up for sampling and cutting. - Logging is considered to be at an appropriate quantitative standard to use in future studies.
Sub-sampling techniques and sample preparation	- If core, whether cut or sawn and whether quarter, half or all core taken. - If non-core, whether riffled, tube sampled, rotary split, etc. and whether sampled wet or dry. - For all sample types, the nature, quality and appropriateness of the sample preparation technique. - Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.	- Drill core is typically half-core sampled using an Almonte core saw. The drill core orientation line is retained. - Quarter core is used when taking sampling duplicates (termed FDUP in the database). - Sampling representivity is maximised by always taking the same side of the drill core (whenever oriented), and consistently drawing a cut line on the core where orientation is not possible. The field technician draws these lines.

Criteria	JORC Code explanation	Commentary
	- Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. - Whether sample sizes are appropriate to the grain size of the material being sampled.	- Sample sizes are maximised for coarse gold by using half core, and using quarter core and half core splits (laboratory duplicates) allows an estimation of nugget effect. - In mineralized rock the company uses approximately 10% of ¼ core duplicates, certified reference materials (suitable OREAS materials), laboratory sample duplicates and instrument repeats. - In the soil sampling program duplicates were obtained every 20th sample and the laboratory inserted low-level gold standards regularly into the sample flow.
Quality of assay data and laboratory tests	- The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. - For geophysical tools, spectrometers, handheld XRF instruments, etc., the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. - Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.	- The fire assay technique for gold used by On Site is a globally recognised method, and over-range follow-ups including gravimetric finish and screen fire assay are standard. Of significance at the On Site laboratory is the presence of fire assay personnel who are experienced in dealing with high sulfide charges (especially those with high stibnite contents) – this substantially reduces the risk of in accurate reporting in complex sulfide-gold charges. - Where screen fire assay is used, this assay will be reported instead of the original fire assay. - The ICP-OES technique is a standard analytical technique for assessing elemental concentrations. The digest used (aqua regia) is excellent for the dissolution of sulfides (in this case generally stibnite, pyrite and trace arsenopyrite), but other silicate-hosted elements, in particular vanadium (V), may only be partially dissolved. These silicate-hosted elements are not important in the determination of the quantity of gold, antimony, arsenic or sulphur. - A portable XRF has been used in a qualitative manner on drill core to ensure appropriate core samples have been taken (no pXRF data are reported or included in the MX database). - Acceptable levels of accuracy and precision have been established using the following methods ¼ duplicates – half core is split into quarters and given separate sample numbers (commonly in mineralized core) – low to medium gold grades indicate strong correlation, dropping as the gold grade increases over 40 g/t Au. Blanks – blanks are inserted after visible gold and in strongly mineralized rocks to confirm that the crushing and pulping are not affected by gold smearing onto the crusher and LM5 swing mill surfaces. Results are excellent, generally below detection limit and a single sample at 0.03 g/t Au. Certified Reference Materials – OREAS CRMs have been used throughout the project including blanks, low (<1 g/t Au), medium (up to 5 g/t Au) and high-grade gold samples (> 5 g/t Au). Results are automatically checked on data import into the MX database to fall within 2 standard deviations of the expected value. Laboratory splits – On Site conducts splits of both coarse crush and pulp

Criteria	JORC Code explanation	Commentary
		duplicates as quality control and reports all data. In particular, high Au samples have the most repeats. <i>Laboratory CRMs</i> – On Site regularly inserts their own CRM materials into the process flow and reports all data <i>Laboratory precision</i> – duplicate measurements of solutions (both Au from fire assay and other elements from the aqua regia digests) are made regularly by the laboratory and reported. • <i>Accuracy and precision</i> have been determined carefully by using the sampling and measurement techniques described above during the sampling (accuracy) and laboratory (accuracy and precision) stages of the analysis. • <i>Soil sample</i> company duplicates and laboratory certified reference materials all fall within expected ranges.
Verification of sampling and assaying	• <i>The verification of significant intersections by either independent or alternative company personnel.</i> • <i>The use of twinned holes.</i> • <i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i> • <i>Discuss any adjustment to assay data.</i>	• The Independent Geologist has visited Sunday Creek drill sites and inspected drill core held at the Kilmore core shed. • Visual inspection of drill intersections matches both the geological descriptions in the database and the expected assay data (for example, gold and stibnite visible in drill core is matched by high Au and Sb results in assays). • In addition, on receipt of results Company geologists assess the gold, antimony and arsenic results to verify that the intersections returned expected data. • The electronic data storage in the MX database is of a high standard. Primary logging data are entered directly by the geologists and field technicians and the assay data are electronically matched against sample number on return from the laboratory. • Certified reference materials, ¼ core field duplicates (FDUP), laboratory splits and duplicates and instrument repeats are all recorded in the database. • Exports of data include all primary data, from hole SDDSC077B onwards after discussion with SRK Consulting. Prior to this gold was averaged across primary, field and lab duplicates. • Adjustments to assay data are recorded by MX, and none are present (or required). • Twinned drill holes are not available at this stage of the project.
Location of data points	• <i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i> • <i>Specification of the grid system used.</i> • <i>Quality and adequacy of topographic control.</i>	• Differential GPS used to locate drill collars, trenches and some workings • Standard GPS for some field locations (grab and soils samples), verified against Lidar data. • The grid system used throughout is Geocentric datum of Australia 1994; Map Grid Zone 55 (GDA94_Z55), also referred to as ELSG 28355. Reported azimuths also relate to MGA55 (GDA94_Z55). • Topographic control is excellent owing to sub 10 cm accuracy from Lidar data.

Criteria	JORC Code explanation	Commentary
Data spacing and distribution	• <i>Data spacing for reporting of Exploration Results.</i> • <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> • <i>Whether sample compositing has been applied.</i>	• The data spacing is suitable for reporting of exploration results – evidence for this is based on the improving predictability of high-grade gold-antimony intersections. • At this time, the data spacing and distribution are not sufficient for the reporting of Mineral Resource Estimates. This however may change as knowledge of grade controls increase with future drill programs. • Samples have been composited to a 1 g/t AuEq over 2.0 m width for lower grades and 5 g/t AuEq over 1.0 m width for higher grades in table 3. All individual assays above 0.1 g/t AuEq have been reported to two decimal places with no compositing in table 4.
Orientation of data in relation to geological structure	• <i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i> • <i>If the relationship between the drilling orientation and the orientation of key mineralized structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	• The true thickness of the mineralized intervals reported are interpreted to be approximately 50-65% of the sampled thickness. • Drilling is oriented in an optimum direction when considering the combination of host rock orientation and apparent vein control on gold and antimony grade. The steep nature of some of the veins may give increases in apparent thickness of some intersections, but more drilling is required to quantify. • A sampling bias is not evident from the data collected to date (drill holes cut across mineralized structures at a moderate angle).
Sample security	• <i>The measures taken to ensure sample security.</i>	• Drill core is delivered to the Kilmore core logging shed by either the drill contractor or company field staff. Samples are marked up and cut by company staff at the Kilmore core shed, in an automated diamond saw and bagged before loaded onto strapped secured pallets and trucked by company staff to Bendigo for submission to the laboratory. There is no evidence in any stage of the process, or in the data for any sample security issues.
Audits or reviews	• <i>The results of any audits or reviews of sampling techniques and data.</i>	• Continuous monitoring of CRM results, blanks and duplicates is undertaken by geologists and the company data geologist. Mr Michael Hudson for SXG has the orientation, logging and assay data.

Section 2 Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	- Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. - The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	The Sunday Creek Goldfield, containing the Clonbinane Project, is covered by the Retention Licence RL 6040 and is surrounded by Exploration Licence EL6163 and Exploration Licence EL7232. All the licences are 100% held by Clonbinane Goldfield Pty Ltd, a wholly owned subsidiary company of Southern Cross Gold Ltd.
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	- The main historical prospect within the Sunday Creek project is the Clonbinane prospect, a high level orogenic (or epizonal) Fosterville-style deposit. Small scale mining has been undertaken in the project area since the 1880s continuing through to the early 1900s. Historical production occurred with multiple small shafts and alluvial workings across the Clonbinane Goldfield permits. Production of note occurred at the Clonbinane area with total production being reported as 41,000 oz gold at a grade of 33 g/t gold (Leggo and Holdsworth, 2013) - Work in and nearby to the Sunday Creek Project area by previous explorers typically focused on finding bulk, shallow deposits. Beadell Resources were the first to drill deeper targets and Southern Cross have continued their work in the Sunday Creek Project area. - EL54 - Eastern Prospectors Pty Ltd Rock chip sampling around Christina, Apollo and Golden Dyke mines. Rock chip sampling down the Christina mine shaft. Resistivity survey over the Golden Dyke. Five diamond drill holes around Christina, two of which have assays. - ELs 872 & 975 - CRA Exploration Pty Ltd Exploration focused on finding low grade, high tonnage deposits. The tenements were relinquished after the area was found to be prospective but not economic. Stream sediment samples around the Golden Dyke and Reedy Creek areas. Results were better around the Golden Dyke. 45 dump samples around Golden Dyke old workings showed good correlation between gold, arsenic and antimony. Soil samples over the Golden Dyke to define boundaries of dyke and mineralization. Two costeans parallel to the Golden Dyke targeting soil anomalies. Costeans since rehabilitated by SXG. - ELs 827 & 1520 - BHP Minerals Ltd

Criteria	JORC Code explanation	Commentary
		Exploration targeting open cut gold mineralization peripheral to SXG tenements. • ELs 1534, 1603 & 3129 - Ausminde Holdings Pty Ltd Targeting shallow, low grade gold. Trenching around the Golden Dyke prospect and results interpreted along with CRAs costeans. 29 RC/Aircore holes totalling 959 m sunk into the Apollo, Rising Sun and Golden Dyke target areas. • ELs 4460 & 4987 - Beadell Resources Ltd ELs 4460 and 4497 were granted to Beadell Resources in November 2007. Beadell successfully drilled 30 RC holes, including second diamond tail holes in the Golden Dyke/Apollo target areas. • Both tenements were 100% acquired by Auminco Goldfields Pty Ltd in late 2012 and combined into one tenement EL4987. • Nagambie Resources Ltd purchased Auminco Goldfields in July 2014. EL4987 expired late 2015, during which time Nagambie Resources applied for a retention licence (RL6040) covering three square kilometres over the Sunday Creek Goldfield. RL6040 was granted July 2017. • Clonbinane Gold Field Pty Ltd was purchased by Mawson Gold Ltd in February 2020. Mawson drilled 30 holes for 6,928 m and made the first discoveries to depth.
Geology	• <i>Deposit type, geological setting and style of mineralization.</i>	• Refer to the description in the main body of the release.
Drill hole Information	• <i>A summary of all information material to the understanding of the exploration results including a tabulation of the following</i> • <i>information for all Material drill holes:</i> ○ <i>easting and northing of the drill hole collar</i> ○ <i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</i> ○ <i>dip and azimuth of the hole</i> ○ <i>down hole length and interception depth</i> ○ <i>hole length.</i> • <i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i>	• Refer to appendices
Data aggregation methods	• <i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high-grades) and cut-off grades are usually Material and should be stated.</i>	• See “Further Information” and “Metal Equivalent Calculation” in main text of press release.

Criteria	JORC Code explanation	Commentary
	- Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. - The assumptions used for any reporting of metal equivalent values should be clearly stated.	
Relationship between mineralization widths and intercept lengths	- These relationships are particularly important in the reporting of Exploration Results. - If the geometry of the mineralization with respect to the drill hole angle is known, its nature should be reported. - If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g 'down hole length, true width not known').	See reporting of true widths in the body of the press release.
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	The results of the diamond drilling are displayed in the figures in the announcement.
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high-grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	- All results above 0.1 g/t Au have been tabulated in this announcement. The results are considered representative with no intended bias. - Core loss, where material, is disclosed in tabulated drill intersections.
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	- Preliminary testing was reported in January 11, 2024. This established the general metallurgical test procedure for samples from the Sunday Creek deposits and demonstrated the basis for confidence in establishing prospects for economic recovery of contained gold and antimony to three separate products: - Metallic gold product by gravity recovery - Antimony-gold flotation concentrate - Pyrite-arsenopyrite-gold flotation concentrate - Testing has now been expanded to include samples from additional zones of the mineral deposits and to refine metallurgical processes. The aim was to improve aspects of antimony concentrate production, maximise gold recovery to a high-grade metallic product, and to further investigate the nature of gold occurrence. - The work, conducted by ALS Burnie Laboratories, focused on: - Improving selectivity between sulphide minerals in the antimony flotation stage whilst maintaining high overall gold recovery.

Criteria	JORC Code explanation	Commentary
		○ Further processing of the flotation concentrates, to assess the metallurgical response of contained gold. ○ Mineralogical examination of selected product samples. • It was demonstrated that, with appropriate process conditions, high antimony and gold recovery could be maintained whilst rejecting arsenic and iron sulphides in the first flotation stage. The antimony concentrate produced (~50% Sb, <0.2% As) is deemed to be attractive to the smelter market. • Recovery of antimony to concentrate varied with feed type, and ranged from 83% to 93% for the samples tested from the antimony rich zones. • Additional metallic gold was recovered from the flotation concentrate by gravity separation. • The gold grade of the concentrate is a function of the proportion of feed gold associated with arsenic-iron sulphides, the ratio of gold to antimony in the feed, the gold recovered to the metallic gold product, and the flotation rate of gold in the first flotation stage. • High overall gold recovery was achieved with all samples tested. • <i>Further Work</i> ○ Additional characterization testing across deposit zones ○ Locked cycle testing to confirm overall recoveries ○ Multi-stage cleaning optimization to maximize concentrate quality ○ Pilot plant evaluation of larger samples ○ Process plant design studies targeting Q1 2027 completion
Further work	• <i>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</i> • <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i>	• The Company has stated it will drill 200,000 m through 2025 to Q1 2027. • See diagrams in presentation which highlight current and future drill plans.