

Updated ASX Announcement – Anson Discovers Additional High Grade Critical Minerals Assays at its Ajana Project

Anson Resources Limited (ASX: **ASN**) (“**Anson Resources**” or “**the Company**”) has updated the announcement dated 19 August 2024 to include coordinates for the newly identified high-grade historical rock chips and soil samples. JORC Table 1 has also been updated with commentary relevant to those samples.

This announcement has been authorised for release by the Executive Chairman and CEO.

ENDS

For further information please contact:

Bruce Richardson
Executive Chairman and CEO
E: info@ansonresources.com
Ph: +61 7 3132 7990
Follow us on Twitter @anson_ir

Will Maze
Head of Investor Relations
E: investors@ansonresources.com
Ph: +61 7 3132 7990

Click here to subscribe to news from Anson Resources: <https://www.ansonresources.com/contact/>

About Anson Resources Ltd

Anson Resources (ASX: ASN) is an ASX-listed mineral resources company with a portfolio of minerals projects in key demand-driven commodities. Its core asset is the Paradox Lithium Project in Utah, in the USA. Anson is focused on developing the Paradox Project into a significant lithium producing operation. The Company's goal is to create long-term shareholder value through the discovery, acquisition and development of natural resources that meet the demand of tomorrow's new energy and technology markets.

Anson Discovers Additional High Grade Critical Minerals Assays at its Ajana Project

ASX: [ASN](#) Announcement

Highlights:

- High grade gallium (Ga) and Barium (Ba) historical rock chip and soil samples discovered in locations across the Ajana Project area,
 - Historical samples assayed up to 390g/t Ga,
- Associated with high grade zinc mineralization similar to the nearby Ethel Maude Prospect,
- Anson's recent drilling programs intersected high grade critical minerals,
 - Maximum values up to 67g/t Ga, 44g/t In, 40g/t Ge and 20,020g/t Ba,
- During the zinc ore processing some of these minerals can be enriched 5 to 10-fold,
- Extension of the critical minerals mineralised zones have been identified for further drilling programs,

Anson Resources Limited (ASX: ASN) ("Anson Resources" or "the Company") is pleased to announce that extensive high-grade mineralization of the critical minerals Gallium (GA) and Barium (Ba) have been discovered in association with the zinc, lead, copper and silver mineralisation from historical regolith and rock chip sampling programs. The historical results, see Eagle Minerals ASX Announcement 29 October 2010, were identified through the review of WAMEX reports, see Table 1. These historical rock chip results correlate with recent drilling programs completed by Anson at Ethel Maude, *see ASX Announcement 30 May 2024*.

Sample ID	Historical Tenement	Zn (g/t)	Pb (g/t)	Cu (g/t)	Ag (g/t)	Ga (g/t)	Ba (g/t)
810501	E66/75	472000	1570	388	202	390	150
810502	E66/75	922	1960	1710	4.7	10	220
810503	E66/75	500	12550	219000	110	10	180
810504	E66/75	148000	2190	582	47.3	100	140
810505	E66/75	137500	6810	3990	27.9	70	130
810506	E66/75	1490	2020	37	<0.5	20	250
810507	E66/75	574	358	19	<0.5	10	1140
810508	E66/75	689	21400	109	1.1	10	430
810509	E66/75	99	7530	27	<0.5	10	630
810001	E66/75	7150	26000	696	20.8	10	790
810002	E66/75	8070	27600	896	20.2	10	630

Table 1: The Zn, Pb, Ag and critical mineral (Ga, In, Ge, Ba) assays from the newly discovered prospects.

The recent drilling program conducted by Anson at the Ethel Maude Prospect identified high grade zinc

and silver mineralization, see ASX Announcement 6 February 2024. High grade critical minerals were associated with this mineralization with maximum values up to 67g/t Ga, 44g/t In, 40g/t Ge and 22,020g/t Ba, see Table 2. The results from the drilling correlate with the historical soil and rock chip sampling programs, see Figures 2 and 3. Drilling programs have been planned to extend these Zn-Pb-Ag-Ga-In-Ge-Ba mineralized zones and the critical minerals have the potential to represent a significant economic addition to all of Anson's prospects in the Ajana area.

The high grade Zn, Pb, Cu and Ag rock chips are located along the dolerite dykes or the cross-cutting faults which correlates with the mineralisation seen at Ethel Maude. The high grades are also seen to be located close to Zn, Pb, Cu anomalies and also the VTEM anomalies, see Figure 1.

Hole ID	From	To	Interval	Zn (%)	Pb(%)	Ag(g/t)	Ga(g/t)	In(g/t)	Ge(g/t)	Ba(g/t)
AJRC31	4	8	4	13.4	1.8	23	41	21	25	859
including	4	5	1	29.5	1.2	43	67	44	40	455
	12	31	19	1.1	1.3	8	20	2	5	3,423
including	27	31	4	2.3	3.3	19	21	2	9	6,902
including	27	28	1	2.4	0.7	22	23	2	10	22,020
AJRC32	19	40	21	2.4	2.2	7.4	22	3	8	1,253
	45	54	9	2.6	2.5	8	23	3	6	1,320
AJRC37	30	42	12	1.3	2.8	7.2	20	1	5	3,913
including	30	31	1	7.8	28.8	30	29	7	10	10,260

Table 2: The Zn, Pb and critical mineral (Ga, In, Ge, Ba) assays from the Ethel Maude Prospect.

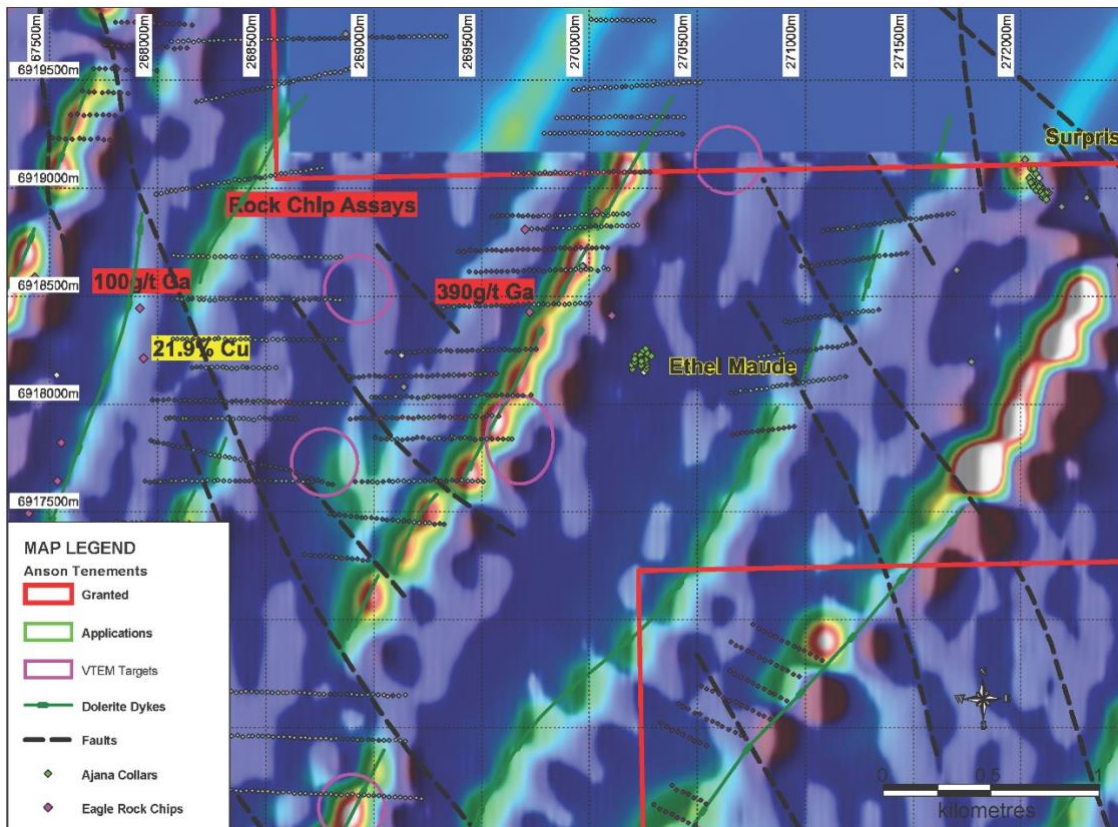


Figure 1: Plan showing the drillhole locations where critical minerals have been recorded and soil sampling programs at the Ajana Project.

The interpreted VTEM targets, *see ASX Announcement 13 November 2017*, correlate with identified mineralized zones which strike parallel with the dolerite dykes and were initially identified as sulphide mineralized zones, but more recently critical minerals have been found to be associated with these high-grade mineralized zones. The interpreted anomalies from historical soil sampling programs and geological mapping programs are being used as a basis for follow-up drilling programs that will be conducted for further analysis of the critical minerals that are present at the Ajana Project.

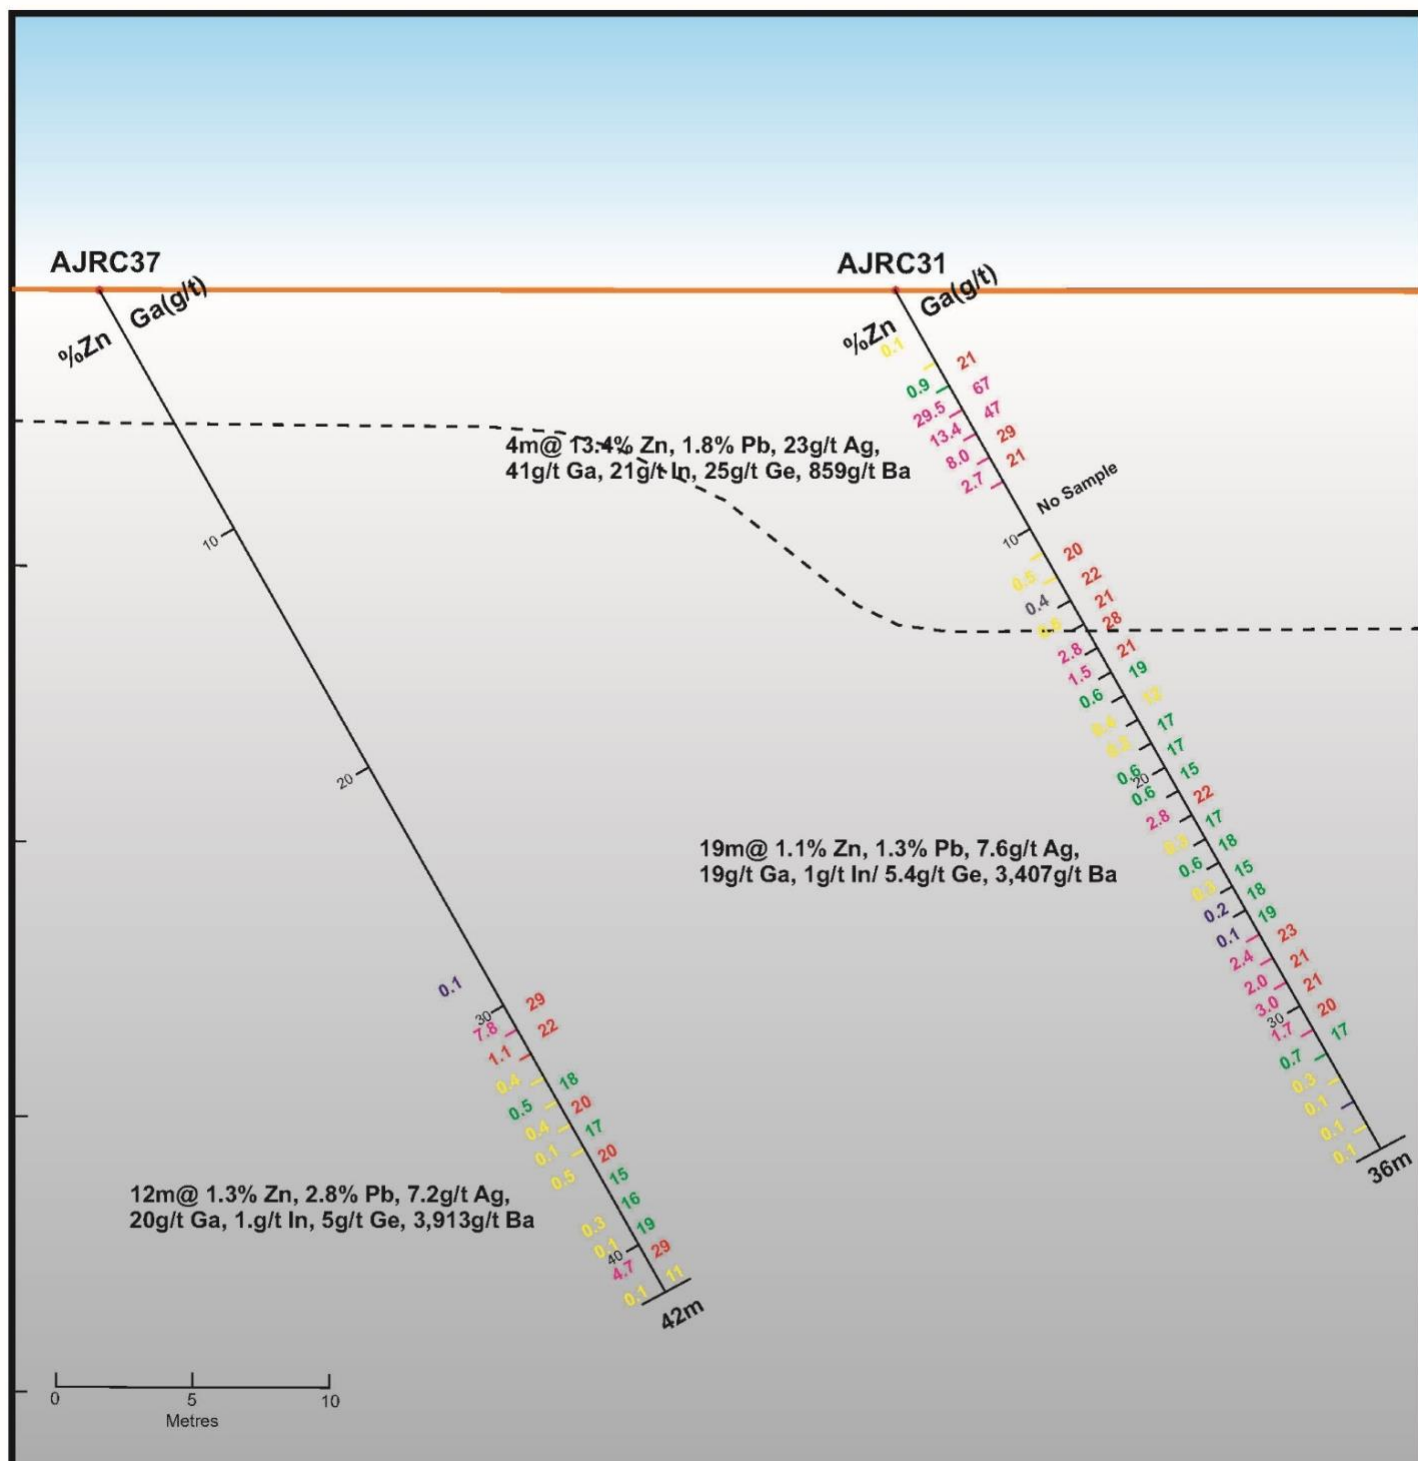


Figure 2: Cross Section showing the high-grade mineralization at the Ethel Maude Prospect.

About the Ajana Project

Anson purchased the Ajana Project (E66/89) in December 2015 and won the ballot for the Mary Springs Prospect (E66/94) in August 2016. In 2024 the E66/131 was applied for to increase the total area to 200.5 km² the Ajana Project which covers numerous Zn, Pb, Cu and Ag prospects. The tenements were pegged with the knowledge of the work already completed and the fact that the entire area had been underexplored.

Extensive work that has been completed over the Ajana Project Area:

- 1970's West Australian government funded regolith geochemistry sampling program identified widespread Gallium and Barium,
- 1970's Poseidon Ltd metallurgical testing of Mary Springs Pb deposit,
- 1973 ACM soil sampling programs identified Zn, Pb & Cu anomalies,
- 1971 Tycho Mining rock chip samples of Zn-Pb-Ag prospects,
- 2010 Eagle Nickel rock chip sampling programs – identified Zn-Pb-Ag-Ga-Ba mineralization,
- 2010 Ethan Drilling programs - calculated Mary Springs Pb JORC Resource
- 2017 Anson updated the Pb resource to be 2012 JORC compliant
- 2017 Anson funded Versatile Time Domain Electromagnetic System (VTEM) survey identified 31 mineralization drilling targets
- 2023/24 Anson Ethel Maude and Surprise Drilling programs – Zinc, Lead, Silver assay results under review, identified critical minerals Gallium, Indium, Germanium and Barium.

The geological and geophysical results correlate and identify various mineralization targets, across the Ajana Project area, that can be drilled to add additional resource for Zn-Pb-Ag-Ga-In-Ge-Ba. See Figure 3.

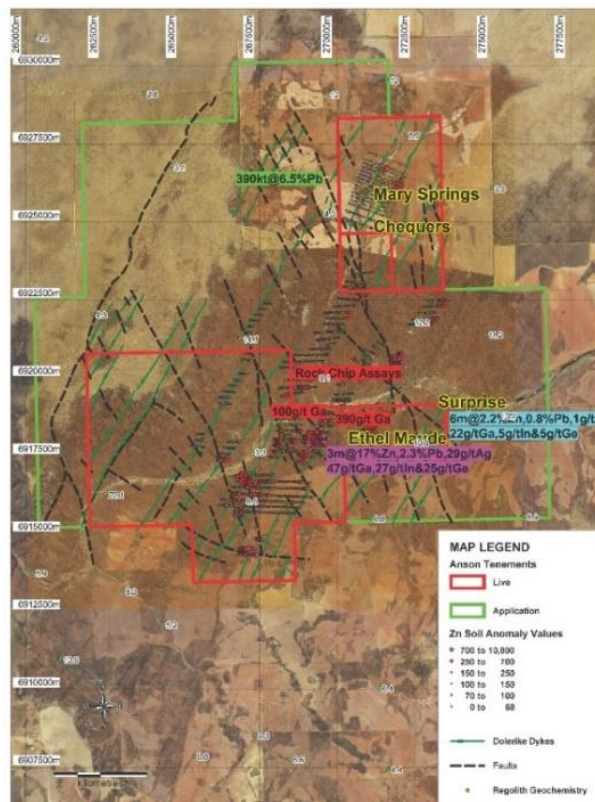


Figure 3: Plan showing the soil sample locations, where critical minerals have been recorded at the Ajana Project.

About Gallium, Indium and Germanium

On 1 August 2023, China which produces 98% of the worlds Gallium and 92% of Germanium cancelled all exports, weaponizing supply, highlighting the need to secure safe and reliable supply of critical elements and minerals. It is anticipated that USA and European semiconductor chip manufacturers will actively seek to establish long term supply contracts with future Gallium suppliers (outside of China), such as Australia.

Gallium

Gallium is a soft metallic element used in semi-conductors, blue ray technology light emitting diodes (LEDs), mobile phones and nuclear engineering because of their non-toxicity and resistance to neutron radiation and beta decay. On August 1, 2023, China which produces 98% of the worlds Gallium cancelled all exports. The supply increase is a result of the increase in demand for Gallium Nitride (GaN) energy saving chips due to

- 7% price increase year to date
- Demand increases for cost effective fifth generation (5G) networks requiring gallium computer chips,
- Wireless charging required for future electric vehicles,
- GaN chips have lower power loss and provide smooth connection between solar energy to grid power storage systems.

Indium

Indium is most commonly recovered from sphalerite, a zinc-sulphide mineral, widely used in the aerospace, defence, energy and telecommunications sectors. Currently the US is a 100% net importer of indium.

- Indium tin oxide (ITO) accounts for most of the global consumption used as for thin film coatings on electrically conductive purposes (flat screens),
- Also used in night vision equipment, aerospace alloys and solar cells.

Germanium

There has been a significant increase in demand for Germanium for its use in

- Fibre optics, infra-red optics, high brightness LED's and in semi-conductors,
- Night vision and night targeting,
- Solar panels as the most efficient energy generator.

Barium

- Barium titanate, a ferroelectric material is used in the production of capacitors and electronic components
- Barium sulfate, used as a contrast agent in medical imaging – Xrays, CT scans

Current Metal Prices

- Zinc US\$ 2,749.60/t (LME, August 17, 2024)
- Lead US\$ 2,022.05/t (LME, August 17, 2024)
- Silver US\$ 29.01/oz (Kitco Strategic Metals, August 17, 2024)
- Gallium US\$ 889.30/kg (Kitco Strategic Metals, August 14, 2024)
- Indium US\$ 672.40/kg (Kitco Strategic Metals, August 14, 2024)
- Germanium US\$ 3,535.10/kg (Kitco Strategic Metals, August 14, 2024)

This announcement has been authorized for release by the Executive Chairman and CEO.

ENDS

For further information please contact:

Bruce Richardson
Executive Chairman and CEO
E: info@ansonresources.com
Ph: +61 7 3132 7990
www.ansonresources.com
Follow us on Twitter @anson_ir

Will Maze
Head of Investor Relations
E: investors@ansonresources.com
Ph: +61 7 3132 7990

Click here to subscribe to news from Anson Resources: <https://www.ansonresources.com/contact/>

Appendix A

Sample ID	Easting	Northing	Zn (ppm)	Pb (ppm)	Cu (ppm)	Ag (g/t)	Ga (g/t)	Sample	Sample Tenement
810501	269722	6918428	472000	1570	388	202000	390	Rock	E66/75
810502	267429	6918588	922	1960	1710	4.7	10	Rock	E66/75
810503	267935.6	6918214	500	12550	219000	110000	10	Rock	E66/75
810504	267917.8	6918445	148000	2190	582	47.3	100	Rock	E66/75
810505	270104.1	6918410	137500	6810	3990	27.9	70	Rock	E66/75
810506	269704.2	6918810	1490	2020	37	<0.5	20	Rock	E66/75
810507	270033	6918890	574	358	19	<0.5	10	Rock	E66/75
810508	267553.4	6917823	689	21400	109	1.1	10	Rock	E66/75
810509	267144.6	6918170	99	7530	27	<0.5	10	Rock	E66/75
810001	267535.7	6917646	7150	26000	696	20.8	10	Rock	E66/75
810002	267402.4	6917494	8070	27600	896	20.2	10	Rock	E66/75

Table 3: Rock chip locations collected over the surrendered tenement E66/75.

About Anson Resources Ltd

Anson Resources (ASX: ASN) is an ASX-listed mineral resources company with a portfolio of minerals projects in key demand-driven commodities. Its core asset is the Paradox Lithium Project in Utah, in the USA. Anson is focused on developing the Paradox Project into a significant lithium producing operation. The Company's goal is to create long-term shareholder value through the discovery, acquisition and development of natural resources that meet the demand of tomorrow's new energy and technology markets.

Forward Looking Statements: Statements regarding plans with respect to Anson's mineral projects are forward-looking statements. There can be no assurance that Anson's plans for development of its projects will proceed as expected and there can be no assurance that Anson will be able to confirm the presence of mineral deposits, that mineralisation may prove to be economic or that a project will be developed.

Competent Person's Statement 1: The information in this announcement that relates to exploration results and geology is based on information compiled and/or reviewed by Mr Greg Knox, a member in good standing of the Australasian Institute of Mining and Metallurgy. Mr Knox is a geologist who has sufficient experience which is relevant to the style of mineralisation under consideration and to the activity being undertaken to qualify as a "Competent Person", as defined in the 2012 Edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves and consents to the inclusion in this report of the matters based on information in the form and context in which they appear. Mr Knox is a director of Anson.

JORC Code 2012 “Table 1” Report

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code Explanation	Commentary
Sampling techniques	- Nature and quality of sampling (e.g. cut channels, random chips, or specific specialized industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling. - Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. - Aspects of the determination of mineralization that are Material to the Public Report. - In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverized to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralization types (e.g. submarine nodules) may warrant disclosure of detailed information.	Reverse Circulation (RC): - Used high pressure air and a cyclone with a cone splitter. - Sampling was taken on continuous 1m intervals. - Standards and blanks were inserted during the drilling; and 3-5 kg were transported to the laboratory in calico bags. - Industry standard RC drilling methods were used. Rock chip samples: - Samples weighing 2-3kg were collected across the surrendered tenement E66/75 and previously reported to the ASX by Eagle Minerals. - Samples were considered to be representative of the material sampled. - Samples were submitted for multi-element analysis at Ultratrace Laboratories. - Samples ground -75 micron and assayed using ICP-MS and ICP-OES. Soil samples: - Carried out on a grid of 200m*25m and infilled where high anomalies were detected. - Normal soil sampling techniques were used where rocks were outcropping. - Samples were sieved and -80 mesh fractions were analysed for Pb, Zn, Cu & Ag. - Samples were analysed by Atomic Absorption at Geochemical and Mineralogical Laboratories in Belmont, WA..
Drilling Techniques	Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face sampling bit or other type, whether core is oriented and if so, by what method, etc.).	- RC Drilling (5 ½" hammer). - Normal soil sampling techniques were used and if rocks were outcropping, sampling was taken as close as possible to the bedrock.
Drill Sample Recovery	- Method of recording and assessing core and chip sample recoveries and results assessed. - Measures taken to maximise sample recovery and ensure representative nature of the samples. - Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	- RC split samples were recovered from a cyclone. - A face sampling hammer is used to reduce contamination at the face.
Logging	- Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. - Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography. - The total length and percentage of the relevant intersections logged.	- All RC chips were geologically logged in the field by a qualified geologist. - Geological logging is qualitative in nature.

Criteria	JORC Code Explanation	Commentary
Sub-sampling Techniques and Preparation	• If core, whether cut or sawn and whether quarter, half or all core taken • If non-core, whether riffled, tube sampled, rotary split, etc. and whether sampled wet or dry. • For all sample types, the nature, quality and appropriateness of the sample preparation technique. • Quality control procedures adopted for all sub-sampling stages to maximize representivity of samples. • Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. • Whether sample sizes are appropriate to the grain size of the material being sampled.	• 1m samples from the RC drilling were submitted to Nagrom Laboratories in Perth. • Sample preparation techniques represent industry good practice. • Sampling procedures represent industry good practice. • The sample sizes are considered to be appropriate for the material being sampled. • Soil and rock chip sampling represent industry good practice.
Quality of Assay Data and Laboratory Tests	• The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. • For geophysical tools, spectrometers, handheld XRF instruments, etc., the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. • Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.	• Drilling analysis was carried out by Nagrom, Perth which is AQIS registered site and has a license to import and quarantine geological material. • Certified standards, blanks and duplicates were inserted in every hole. • Rock chip analysis was carried out by Ultratrace Laboratories in Perth. • Soil sampling analysis was carried out by Geochemical and Mineralogical Laboratories. • Tycho Mining carried out metallurgical test work on Ethel Maude samples to determine the Zn, Pb, Ag recoveries and also the Ga, In and Ge upgrades.
Verification of Sampling and Assaying	• The verification of significant intersections by either independent or alternative company personnel. • The use of twinned holes. • Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. • Discuss any adjustment to assay data. •	• The results are considered acceptable and reviewed by geologists. • No adjustments to assay data (except in drilling results where intersection lengths were reported) has been undertaken.
Location of Data Points	• Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. • Specification of the grid system used. • Quality and adequacy of topographic control.	• All data points were located during collection by handheld GPS (Garmin) with a typical accuracy of +/- 5m. • The grid system used is Australian Geodetic MGA Zone 50 (GDA94). • The level of topographic control offered by the handheld GPS is considered sufficient for the work undertaken.
Data Spacing and Distribution	• Data spacing for reporting of Exploration Results. • Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. • Whether sample compositing has been applied.	• There was a predetermined spacing for the holes as this program was to infill and drill down dip of previous drilling programs. • Soil sampling was carried out over a grid of 200m*25m with infill lines where high grade anomalies were detected. • Rock chip samples were collected across the tenement.

Criteria	JORC Code Explanation	Commentary
<i>Orientation of Data in Relation to Geological Structure</i>	- Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. - If the relationship between the drilling orientation and the orientation of key mineralized structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	- The drill holes were drilled at near perpendicular to the strike of the ore body and is not considered to have introduced any bias. - Soil samples were carried out across the dolerite dykes.
<i>Sample Security</i>	The measures taken to ensure sample security.	- RC samples were collected from the cone splitter in calico bags and stored in plastic bags. - All samples were collected in calico bags, put on pallets and bubble wrapped and transported by road to the laboratories in Perth to be analysed.
<i>Audits or Reviews</i>	The results of any audits or reviews of sampling techniques and data	No audits or reviews have been conducted at this point in time.

Section 2 Reporting of Exploration Results

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code Explanation	Commentary
<i>Mineral Tenement and Land Tenure Status</i>	- Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. - The security of the tenure held at the time of reporting along with any known impediments to obtaining a license to operate in the area.	- The Ajana Project consists of 2 tenements, E66/89 and E66/94, which are 100% owned by Anson Resources. - All tenements are in good standing. - Land access agreements have been completed.
<i>Exploration Done by Other Parties</i>	Acknowledgment and appraisal of exploration by other parties.	- Previous exploration was completed by Canadian Southern Cross Mines NL (CSC), Samin Ltd (Samin, a wholly owned subsidiary of Poseiden Ltd), Tycho Minerals and Ethan Minerals NL (Ethan). - Exploration completed included bulk sampling and trial mining from historical underground workings, geophysical surveys (IP and EM), surface geochemical surveys and drilling. - Exploration seems to have been completed to a high standard enabling a shallow pit design to be completed by Tycho Minerals.
<i>Geology</i>	Deposit type, geological setting and style of mineralization.	- The project is located in the Northampton Block, an Archaean gneiss terrane believed to represent a metamorphosed sedimentary sequence. - Mineralisation is hosted on the margins of a dolerite unit, within a breccia unit. - Mineralisation is principally comprised of galena. - Millheim, KK, 1971. Exploitation of the Ethel Maude Zinc-Lead Mine. Tycho Mining. WAMEX Report A5955.

Criteria	JORC Code Explanation	Commentary
<i>Drill Hole Information</i>	- A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: - easting and northing of the drill hole collar - elevation or RL (Reduced Level - elevation above sea level in meters) of the drill hole collar - dip and azimuth of the hole - down hole length and interception depth - hole length. - If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	- Reported in the body of previous announcements. - The co-ordinates of the drillholes listed in the announcement had previously been listed in ASX Announcement 6 February 2024. - Mineralised intervals for these drillholes are listed in ASX Announcements 26 March, 30 May and 11 June 2024.
<i>Data Aggregation Methods</i>	- In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade - Brine samples taken in holes were averaged (arithmetic average) without 14 Criteria JORC Code explanation Commentary truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated. - Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. - The assumptions used for any reporting of metal equivalent values should be clearly stated.	- Only mineralized intervals have been reported (no weighting, minimum/maximum or cut-off grades have been applied to assay results). - Samples were collected in 1m samples. - Metal equivalents are not reported.
<i>Relationship Between Mineralization Widths and Intercept Lengths</i>	- These relationships are particularly important in the reporting of Exploration Results. - If the geometry of the mineralization with respect to the drill hole angle is known, its nature should be reported. - If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').	- Exploration is at an early stage and information is insufficient at this stage. - The drill holes were drilled at near perpendicular to the strike of the ore body and is not considered to have introduced any bias.
<i>Diagrams</i>	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	Appropriate diagrams are shown in the text.
<i>Balanced Reporting</i>	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	- The only assay results disclosed are located on the Ajana Project tenement. - All assay data has been reported for the rock chip samples. - Drillhole data in the text only showed the mineralised intervals, but the cross-section in the text showed all all the assays for those holes shown.

Criteria	JORC Code Explanation	Commentary
<i>Other Substantive Exploration Data</i>	<i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples - size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i>	All available current exploration data has been presented.
<i>Further Work</i>	<i>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</i> <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i>	- Further work is required which includes mapping and other exploration programs such as further RC drilling. - Define future drilling targets. - RC drilling of the identified targets.